

20.1 GENERAL INFORMATION

PERFORMANCE RELATED	INSTALLATION RELATED

Product

ChemSet™ Injection 101 PLUS is a marine grade polyester adhesive anchor.

Benefits, Advantages and Features

- Certified Performance European Technical Approval ETAG 001-5 Option 7

Fast installation:


- Load in 50 minutes (at 20°C)
- Easy cold weather dispensing

Versatile:

- Suitable for anchoring into a wide variety of substrates
- Solid concrete, hollow block and brick
- Flooded holes
- Styrene Free
- Cold and temperate climates
- VOC Compliant

Australian Made

Installation

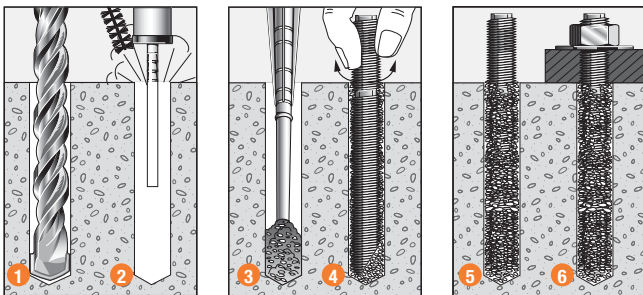

1. Drill recommended diameter and depth hole.
2. **Important:** Use **Ramset™** Dustless Drilling System to ensure holes are clean. Alternatively, clean dust and debris from hole with stiff wire or nylon brush and blower in the following sequence: blow x 4, brush x 3, blow x 4, brush x 3, blow x 4.
3. Insert mixing nozzle to bottom of hole. Fill hole to 3/4 the hole depth slowly, ensuring no air pockets form.
4. Insert **Ramset™** ChemSet™ Anchor Stud/rebar to bottom of hole while turning.
5. ChemSet™ Injection to cure as per setting times.
6. Attach fixture.



Principal Applications

- Hollow brick and block
- Stadium seating
- Starter bars
- Balustrades

Installation temperature limits:


- Substrate: 0°C to 40°C.
- Adhesive: 5°C to 40°C.

Load should not be applied to anchor until the chemical has sufficiently cured as specified in the following diagrams.

Service temperature limits:

-40°C to 80°C.

Setting Times

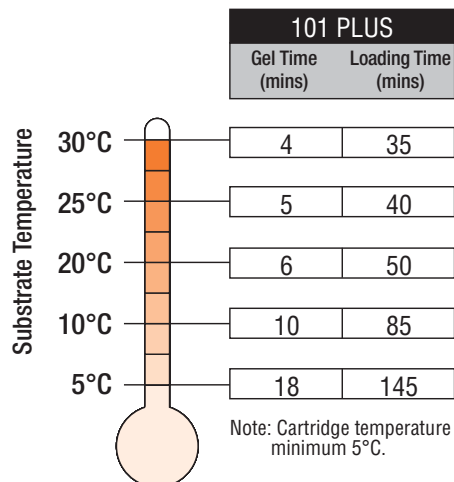

**Installation and performance details:
ChemSet™ Injection 101 PLUS and Reinforcing Bar**

Anchor Size, d_b (mm)	Drilled Hole diam., d_h (mm)	Anchor Effective Depth, h (mm)	Optimum dimensions*			Reduced Characteristic Capacity #				
			Edge* distance, e_c (mm)	Anchor spacing, a_c (mm)	Concrete substrate thickness, b_m (mm)	Gr 500 Rebar - Steel		Concrete		
						Tension, $\emptyset N_{us}$ (kN)***	Shear, $\emptyset V_{us}$ (kN)	Tension, $\emptyset N_{uc}$ (kN)**		
								Concrete compressive strength, f'_c		
20 MPa	32 MPa	40 MPa								
10	14	90	40	60	115	31.4	21.4	7.8	9.8	11.0
12	16	110	50	70	140	45.2	30.8	11.5	14.5	16.2
16	20	125	65	100	160	80.4	54.8	17.3	21.9	24.5
20	25	150	80	120	190	125.6	85.7	26.0	32.9	36.8
		170						29.5	37.3	41.7
24	30	180	100	145	240	180.8	123.3	37.5	47.4	53.0
		210						43.7	55.3	61.9
25	30	180	100	150	240	196.4	133.9	39.1	49.4	55.3
		270			45.6			57.7	64.5	
28	35	225	115	170	295	246.4	168.0	54.7	69.2	77.4
		270			65.6			83.0	92.8	
32	40	240	130	195	320	321.6	219.3	66.7	84.3	94.3
		300			83.4			105.4	117.9	
36	45	290	145	220	380	408.0	278.3	90.6	114.7	128.2
		330			103.2			130.5	145.9	
40	50	320	160	240	420	504.0	343.7	111.1	140.6	157.2
		360			125.0			158.2	176.8	

* Note: For shear loads acting towards an edge or where these optimum dimensions are not achievable, please use the simplified strength limit state design process to verify capacity.
 Note: Reduced characteristic ultimate concrete tensile capacity = $\emptyset N_{uc}$ where $\emptyset = 0.6$ and N_{uc} = Characteristic ultimate concrete tensile capacity. **For conversion to Working Load Limit MULTIPLY $\emptyset N_{uc}$ x 0.55
 ***Note: Reduced characteristic ultimate steel tensile capacity = $\emptyset N_{us}$ where $\emptyset = 0.8$ and N_{us} = Characteristic ultimate steel tensile capacity. **For conversion to Working Load Limit MULTIPLY $\emptyset N_{us}$ x 0.56**
 #Note: Design Tensile Capacity $\emptyset N_{ur}$ = minimum of $\emptyset N_{uc}$ and $\emptyset N_{us}$
WET HOLES: Multiply $\emptyset N_{uc}$ x 1

20.2 DESCRIPTION AND PART NUMBERS

Description	Cartridge Size	Part No.
ChemSet™ 101 PLUS Cartridge	380 ml	C101C
ChemSet™ 101 PLUS Jumbo Cartridge	750 ml	C101J
ChemSet™ 101 PLUS Kit	2 x 380 ml	ISKP
Mixer Nozzle for 101 PLUS	-	ISNP

Effective depth, h (mm)
 $h \geq 6 * d_h$
 (To obtain full steel strength in shear)

Substrate thickness, b_m (mm)
 $b_m = \text{greater of: } 1.25 * h, h + (2 * d_h)$

Drilled hole depth, h_1 (mm)
 $h_1 = h$
 $h = \text{Effective depth}$

20.3 TYPICAL ENGINEERING PROPERTIES OF GRADE 500 REINFORCING BAR

Rebar Size	10	12	16	20	24	25	28	32	36	40
Drilled Hole Dia, d_h (mm)	14	16	20	25	30	30	35	40	45	50
Stress Area, A_s (mm ²)	78.5	113	201	314	452	491	616	804	1020	1260
Yield Stress, f_{sy} (MPa)	500	500	500	500	500	500	500	500	500	500
Tensile Steel Yield Capacity N_{sp} (KN)	39.3	56.5	100.5	157.0	226.0	245.5	308.0	402.0	510.0	630.0

For further information refer to reinforcing bar manufacturer's published information and AS/NZS 4671:2001

STEP 1 Select anchor to be evaluated

Table 1a Indicative combined loading – interaction diagram

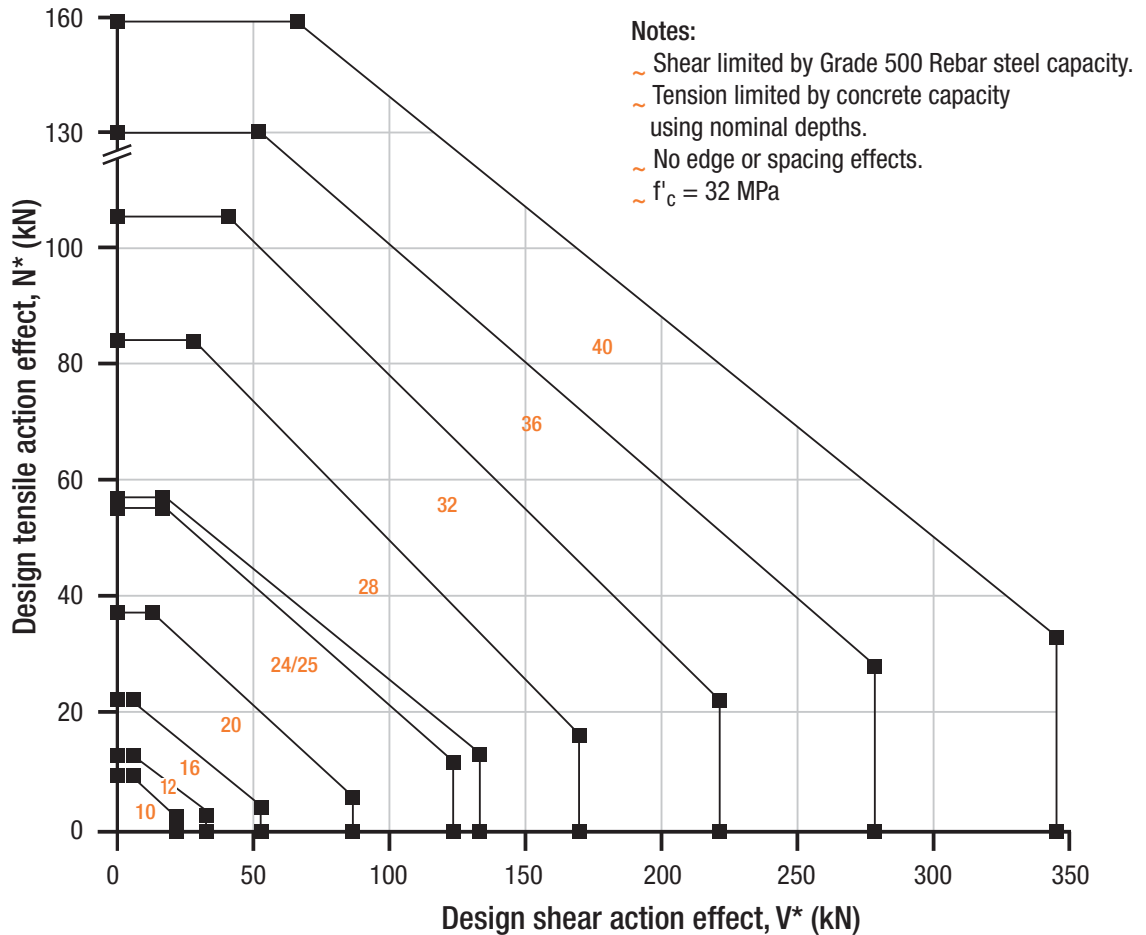


Table 1b Absolute minimum edge distance and anchor spacing values, e_m and a_m (mm)

Anchor size, d_b	10	12	16	20	24	25	28	32	36	40
e_m, a_m	30	36	48	60	72	75	84	96	108	120

Step 1c Calculate anchor effective depth, h (mm)

Refer to nominal recommended effective depths, h , listed in installation and performance details table on page 152.

Effective depth, h (mm)

$h \geq 6 * d_h$

(To obtain full steel strength in shear)

Checkpoint 1 Anchor size determined, absolute minima compliance achieved, effective depth (h) calculated.

STEP 2 Verify concrete tensile capacity - per anchor

Table 2a Reduced characteristic ultimate concrete tensile capacity, ϕN_{uc} (kN), $\phi_c = 0.6$, $f'_c = 32$ MPa

Anchor size, d_h	10	12	16	20	24	25	28	32	36	40
Drilled Hole Dia, d_h (mm)	14	16	20	25	30	30	35	40	45	50
Effective Depth, h (mm)										
85	9.3									
90	9.8									
95	10.4									
100	10.9	13.1								
105	11.5	13.8								
110	12.0	14.5								
115	12.6	15.1								
125	13.7	16.4	21.9							
140	15.3	18.4	24.6							
150	16.4	19.7	26.3	32.9						
170		22.4	29.8	37.3						
180		23.7	31.6	39.5	47.4	49.4				
210			36.9	46.1	55.3	57.7	64.5			
240			42.2	52.7	63.3	65.9	73.8	84.3		
270				59.3	71.1	74.1	83.0	94.8	106.7	
300				65.9	79.0	82.4	92.2	105.4	118.6	131.7
320				70.2	84.3	87.9	98.4	112.4	126.5	140.5
330					86.9	90.6	101.4	115.9	130.4	144.9
360					94.8	98.8	110.7	126.5	142.3	158.1
420						115.3	129.1	147.6	166.0	184.5
460								161.7	181.8	202.0
500								175.7	197.6	219.6
550									217.4	241.6
600										263.5
625										274.5

Bold values are at ChemSet™ Anchor Stud nominal depths.

Note: Effective depth, h must be $\geq 6 \times$ drilled hole diameter, d_h for anchor to achieve tabled shear capacities. **WET HOLES: Multiply ϕN_{uc} x 1**

Table 2b Concrete compressive strength effect, tension, X_{nc}

f'_c (MPa)	20	25	32	40	50
X_{nc}	0.79	0.88	1.00	1.12	1.25

Table 2c Edge distance effect, tension, X_{ne}

Anchor size, d_h	10	12	16	20	24	25	28	32	36	40
Edge Distance, e (mm)										
30	0.83									
35	0.91	0.81								
40	1.00	0.88								
50		1.00	0.85							
65			1.00	0.87						
80				1.00	0.88	0.86				
95					1.00	0.97	0.89	0.82		
100						1.00	0.93	0.85		
110							1.00	0.90	0.83	
130								1.00	0.93	0.87
145									1.00	0.93
160										1.00





Table 2d Anchor spacing effect, end of a row, tension, X_{nae}


For single anchor design, $X_{nae} = 1.0$



Anchor size, d_b	10	12	16	20	24	25	28	32	36	40
Anchor Spacing, a (mm)										
30	0.75									
35	0.79	0.74								
40	0.83	0.78								
50	0.92	0.85	0.76							
60	1.00	0.92	0.81	0.75						
75		1.00	0.89	0.81	0.76	0.75				
95			1.00	0.90	0.83	0.82	0.78			
120				1.00	0.92	0.90	0.86	0.81	0.78	0.75
140					1.00	0.97	0.92	0.86	0.82	0.79
150						1.00	0.95	0.89	0.85	0.81
170							1.00	0.94	0.89	0.85
195								1.00	0.95	0.91
220									1.00	0.96
240										1.00

Table 2e Anchor spacing effect, internal to a row, tension, X_{nai}

For single anchor design, $X_{nai} = 1.0$



Anchor size, d_b	10	12	16	20	24	25	28	32	36	40
Anchor Spacing, a (mm)										
30	0.50									
35	0.58	0.49								
40	0.67	0.56								
50	0.83	0.69	0.52							
60	1.00	0.83	0.63	0.50						
75		1.00	0.78	0.63	0.52	0.50				
95			1.00	0.79	0.66	0.63	0.57	0.49		
120				1.00	0.83	0.80	0.71	0.63	0.56	0.50
150					1.00	1.00	0.89	0.78	0.69	0.63
170							1.00	0.89	0.79	0.71
195								1.00	0.90	0.81
215									1.00	0.90
240										1.00

Checkpoint 2

Design reduced ultimate concrete tensile capacity, ϕN_{urc}

$$\phi N_{urc} = \phi N_{uc} * X_{nc} * X_{ne} * (X_{nae} \text{ or } X_{nai})$$

STEP 3

Verify anchor tensile capacity - per anchor

Table 3a Reduced characteristic ultimate steel tensile capacity, ϕN_{us} (kN), $\phi_n = 0.8$

Anchor size, d_b	10	12	16	20	24	25	28	32	36	40
e_m, a_m	31.4	45.2	80.4	125.6	180.8	196.4	246.4	321.6	408.8	504.0

Step 3b Reduced characteristic ultimate bolt steel tensile capacity, ϕN_{tf} (kN)

Not appropriate for this product.

Checkpoint 3

Design reduced ultimate tensile capacity, $\emptyset N_{ur}$

$$\emptyset N_{ur} = \text{minimum of } \emptyset N_{urc}, \emptyset N_{us}$$

Check $N^* / \emptyset N_{ur} \leq 1$, if not satisfied return to step 1

Tensile performance conversion table

Performance Required	Concrete Tensile Performance		Steel Tensile Performance	
	Notation	Concrete Tension Capacity	Notation	Carbon Steel Tension Capacity
Strength Limit State	$\emptyset N_{urc}$	MULTIPLY $\emptyset N_{urc}$ x 1.00	$\emptyset N_{us}$	MULTIPLY $\emptyset N_{us}$ x 1.00
Working Load Limit	N_{ac}	MULTIPLY $\emptyset N_{urc}$ x 0.55	N_{as}	MULTIPLY $\emptyset N_{us}$ x 0.56
Cyclic Loading	N_{yc}	Refer to page 40 for suitable anchor	N_{ys}	Refer to page 40 for suitable anchor
Fire Resistance	$N_{Rk,c,fi,t}$	Refer to pages 238-257	$N_{Rk,s,fi,t}$	Refer to pages 238-257
Cracked Concrete/Tension Zone	$N_{Rd,p}^0$	Refer to pages 258-298	$N_{Rd,s}$	Refer to pages 258-298
Seismic	$N_{Rd,p,sis}^0$	Refer to pages 299-325	$N_{Rd,s,sis}$	Refer to pages 299-325

NOTE: Design Tensile Capacity is the minimum of Concrete Tension and Steel Tension Capacities

STEP 4

Verify concrete shear capacity - per anchor

Table 4a Reduced characteristic ultimate concrete edge shear capacity, $\emptyset V_{uc}$ (kN), $\emptyset_q = 0.6$, $f'_c = 32$ MPa

Anchor size, d_b	10	12	16	20	24	25	28	32	36	40
Edge Distance, e (mm)										
30	2.5									
35	3.2									
40	3.9	4.2								
50	5.5	5.9	6.5							
60	7.2	7.7	8.6	9.6						
75	10.1	10.8	12.0	13.4	14.7	14.7				
95	14.3	15.3	17.1	19.2	21.0	21.0	22.7			
120	20.4	21.8	24.3	27.2	29.8	29.8	32.2	34.4	36.5	38.5
200	43.8	46.8	52.4	58.6	64.1	64.1	69.3	74.1	78.6	82.8
300	80.5	86.1	96.2	107.6	117.8	117.8	127.3	136.1	144.3	152.1
400	123.9	132.5	148.1	165.6	181.4	181.4	196.0	209.5	222.2	234.2
500	173.2	185.2	207.0	231.5	253.6	253.6	273.9	292.8	310.6	327.4
600	227.7	243.4	272.2	304.3	333.3	333.3	360.0	384.9	408.2	430.3


Note: Effective depth, h must be $\geq 6 \times$ drilled hole diameter, d_h for anchor to achieve tabled shear capacities.

Table 4b Concrete compressive strength effect, concrete edge shear, X_{vc}

f'_c (MPa)	20	25	32	40	50
X_{vc}	0.79	0.88	1.00	1.12	1.25

Table 4c Load direction effect, concrete edge shear, X_{vd}

Angle, α°	0	10	20	30	40	50	60	70	80	90 - 180
X_{vd}	1.00	1.04	1.16	1.32	1.50	1.66	1.80	1.91	1.98	2.00



Load direction effect, conc. edge shear, X_{vd}

Table 4d Anchor spacing effect, concrete edge shear, X_{va}

Note: For single anchor designs, $X_{va} = 1.0$

Edge distance, e (mm)	25	30	35	50	60	75	125	200	300	400	500	600
Anchor spacing, a (mm)												
25	0.70	0.67	0.64	0.60	0.58	0.57	0.54					
30	0.74	0.70	0.67	0.62	0.60	0.58	0.55	0.53				
35	0.78	0.73	0.70	0.64	0.62	0.59	0.56	0.54	0.52			
50	0.90	0.83	0.79	0.70	0.67	0.63	0.58	0.55	0.53	0.53		
60	0.98	0.90	0.84	0.74	0.70	0.66	0.60	0.56	0.54	0.53	0.52	
75	1.00	1.00	0.93	0.80	0.75	0.70	0.62	0.58	0.55	0.54	0.53	0.53
150			1.00	1.00	1.00	0.90	0.74	0.65	0.60	0.58	0.56	0.55
200						1.00	0.82	0.70	0.63	0.60	0.58	0.57
300							0.98	0.80	0.70	0.65	0.62	0.60
400							1.00	0.90	0.77	0.70	0.66	0.63
500								1.00	0.83	0.75	0.70	0.67
625									0.92	0.81	0.75	0.71
750									1.00	0.88	0.80	0.75
875										0.94	0.85	0.79
1000										1.00	0.90	0.83
1250											1.00	0.92
1500												1.00


Table 4e Multiple anchors effect, concrete edge shear, X_{vn}

Note: For single anchor designs, $X_{vn} = 1.0$

Anchor spacing / Edge distance, a / e	0.20	0.40	0.60	0.80	1.00	1.20	1.40	1.60	1.80	2.00	2.25	2.50
Number of anchors, n												
2	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
3	0.72	0.76	0.80	0.83	0.86	0.88	0.91	0.93	0.95	0.96	0.98	1.00
4	0.57	0.64	0.69	0.74	0.79	0.82	0.86	0.89	0.92	0.94	0.97	1.00
5	0.49	0.57	0.63	0.69	0.74	0.79	0.83	0.87	0.90	0.93	0.97	1.00
6	0.43	0.52	0.59	0.66	0.71	0.77	0.81	0.85	0.89	0.93	0.96	1.00
7	0.39	0.48	0.56	0.63	0.69	0.75	0.80	0.84	0.88	0.92	0.96	1.00
8	0.36	0.46	0.54	0.61	0.68	0.74	0.79	0.84	0.88	0.92	0.96	1.00
9	0.34	0.44	0.52	0.60	0.67	0.73	0.78	0.83	0.87	0.91	0.96	1.00
10	0.32	0.42	0.51	0.59	0.66	0.72	0.77	0.82	0.87	0.91	0.96	1.00
15	0.26	0.37	0.47	0.55	0.63	0.70	0.76	0.81	0.86	0.90	0.95	1.00
20	0.23	0.35	0.45	0.54	0.61	0.68	0.75	0.80	0.85	0.90	0.95	1.00

Table 4f Anchor at a corner effect, concrete edge shear, X_{vs}

Note: For $e_1/e_2 > 1.25$, $X_{vs} = 1.0$



Edge distance, e_2 (mm)	25	30	35	50	60	75	125	200	300	400	600	900
Edge distance, e_1 (mm)												
25	0.86	0.77	0.70	0.58	0.53	0.49	0.41	0.37	0.35	0.34	0.32	0.32
30	0.97	0.86	0.78	0.64	0.58	0.52	0.43	0.38	0.36	0.34	0.33	0.32
35	1.00	0.95	0.86	0.69	0.63	0.56	0.46	0.40	0.37	0.35	0.33	0.32
50	1.00	1.00	1.00	0.86	0.77	0.67	0.52	0.44	0.39	0.37	0.35	0.33
60	1.00	1.00	1.00	0.97	0.86	0.75	0.57	0.47	0.41	0.38	0.36	0.34
75	1.00	1.00	1.00	1.00	1.00	0.86	0.64	0.51	0.44	0.41	0.37	0.35
125	1.00	1.00	1.00	1.00	1.00	1.00	0.86	0.65	0.53	0.48	0.42	0.38
200	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.86	0.67	0.58	0.49	0.42
300	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.86	0.72	0.58	0.49
400	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.86	0.67	0.55
500	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.77	0.61
600	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.86	0.67
900	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.86

Checkpoint 4

Design reduced ultimate concrete edge shear capacity, ϕV_{urc}

$$\phi V_{urc} = \phi V_{uc} * X_{vc} * X_{vd} * X_{va} * X_{vn} * X_{vs}$$

STEP 5

Verify anchor shear capacity - per anchor

Table 5a Reduced characteristic ultimate steel shear capacity, ϕV_{us} (kN), $\phi_v = 0.8$

Anchor size, d_b	10	12	16	20	24	25	28	32	36	40
Grade 500 Rebar	21.4	30.8	54.8	85.7	123.3	133.9	168.0	219.3	278.3	343.7

Step 5b Reduced characteristic ultimate bolt steel shear capacity, ϕV_{sf} (kN)

Not appropriate for this product.

Checkpoint 5

Design reduced ultimate shear capacity, ϕV_{ur}

$$\phi V_{ur} = \text{minimum of } \phi V_{urc}, \phi V_{us}$$

$$\text{Check } V^* / \phi V_{ur} \leq 1,$$

if not satisfied return to step 1

Shear performance conversion table

Performance Required	Concrete Shear Performance		Steel Shear Performance	
	Notation	Concrete Shear Capacity	Notation	Carbon Steel Shear Capacity
Strength Limit State	ϕV_{uc}	MULTIPLY ϕV_{uc} x 1.00	ϕV_{us}	MULTIPLY ϕV_{us} x 1.00
Working Load Limit	V_{ac}	MULTIPLY ϕV_{uc} x 0.55	V_{as}	MULTIPLY ϕV_{us} x 0.45
Cyclic Loading	V_{yc}	Refer to page 40 for suitable anchor	V_{ys}	Refer to page 40 for suitable anchor
Fire Resistance	$V_{Rk,c,fi,t}$	Refer to pages 238-257	$V_{Rk,s,fi,t}$	Refer to pages 238-257
Cracked Concrete/Tension Zone	$V_{Rd,c}^0$	Refer to pages 258-298	$V_{Rd,s}^0$	Refer to pages 258-298
Seismic	$V_{Rd,c,sls}^0$	Refer to pages 299-325	$V_{Rd,s,sls}^0$	Refer to pages 299-325

NOTE: Design Shear Capacity is the minimum of Concrete Shear and Steel Shear Capacities

STEP 6

Combined loading and specification

Checkpoint 6

Check

$$N^* / \phi N_{ur} + V^* / \phi V_{ur} \leq 1.2,$$

if not satisfied return to step 1

Specify – Reinforcing Bar Anchorage

Ramset™ ChemSet™ 101 PLUS with (Anchor Size) grade 500 Rebar. Drilled hole depth to be (h) mm.

Example

Ramset™ ChemSet™ 101 PLUS with N20 grade 500 Rebar Drilled hole depth to be 160 mm. To be installed in accordance with Ramset™ Technical Data Sheet.