

# ChemSet™ Reo 502™ PLUS

CHEMICAL INJECTION - NON-CRACKED & CRACKED CONCRETE

AVAILABLE IN AUSTRALIA ONLY

(New Zealand refer to EPCON™ C6 PLUS range)

## GENERAL INFORMATION

Performance Related      Installation Related



### Product

ChemSet™ Reo 502™ PLUS is a heavy duty pure Epoxy for anchoring threaded studs and reinforcing bar into cracked and uncracked concrete.



### Compliance

European Technical Assessment (option 1) - ETA-18/0675

Design according to:

- AS5216 (formerly TS101)
- EN1992-4 (formerly ETAG001 Annex C, E & TR045)
- Use enclosed data for simplified calculation method

Use Ramset™ iExpert Anchor Software for optimised calculation or where a greater range of anchor layout detail is needed.

### Benefits, Advantages and Features

- European Technical Approval 001 Part 5-option 1
- 100 year working Life

Greater productivity:

- Anchors in dry, damp, wet or flooded holes
- Easy dispensing even in cold weather

Greater security:

- Strong bond
- Rated for sustained loading

Versatile:

- Anchors in carbide drilled and diamond drilled holes\*
- Cold and temperate climates

Greater safety:

- Low odour
- VOC Compliant



### Principal Applications

- Threaded Studs
- Starter Bars
- Threaded Inserts
- Over-head installation
- Steel Columns
- Hand Rails
- Road Stitching

### Recommended Installation Temperatures

	Minimum	Maximum
Substrate	5°C	40°C
Adhesive	10°C	40°C

### Service Temperature Limits

-40°C to 70°C

### Setting Times


Temperature of base material	Cartridge Temperature	Gel Time	Curing time in dry and wet concrete
5°C	Minimum 10°C	300 min	24 h
10°C	10°C	150 min	18 h
15°C	15°C	40 min	12 h
20°C	20°C	25 min	8 h
25°C	25°C	18 min	6 h
30°C	30°C	12 min	4 h
40°C	40°C	6 min	2 h

Note: Cartridge temperature minimum +10°C

### Note

\*Performance of cored & oversized holes was not included in the ETAG test program and therefore is based on testing conducted at Ramset™ Product Engineering Laboratory.

### Installation

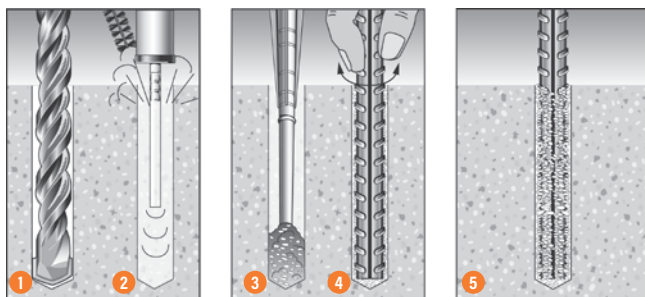

- Drill recommended diameter and depth hole.
- Important:** Use Ramset™ Dustless Drilling System to ensure holes are clean. Alternatively, clean dust and debris from hole with stiff wire or nylon brush and blower in the following sequence: blow x 2, brush x 2, blow x 2, brush x 2, blow x 2.
- Screw mixing nozzle onto cartridge and dispense adhesive until colour is uniform light grey ( 2-3 trigger pulls ). Insert mixing nozzle to bottom of hole. Fill hole to 3/4 the hole depth slowly, ensuring no air pockets form.
- Insert Ramset™ ChemSet™ Anchor Stud/rebar to bottom of hole while turning.
- Allow ChemSet™ Reo 502™ PLUS to cure as per setting times.

# ChemSet™ Reo 502™ PLUS

CHEMICAL INJECTION - NON-CRACKED & CRACKED CONCRETE

AVAILABLE IN AUSTRALIA ONLY

Chemical Anchoring - Reinforcing Bar Anchorage

## Installation and performance details: ChemSet™ Reo502™ PLUS and Reinforcing Bar

Anchor Size, $d_b$ (mm)	Drilled Hole diam., $d_h$ (mm)	Anchor Effective Depth, $h$ (mm)	Optimum dimensions*			Reduced Characteristic Capacity #				
			Edge* distance, $e_c$ (mm)	Anchor spacing, $a_c$ (mm)	Concrete substrate thickness, $b_m$ (mm)	Gr 500 Rebar - Steel		Non-Cracked Concrete		
						Tension, $\phi N_{us}$ (kN)***	Shear, $\phi V_{us}$ (kN)	Tension, $\phi N_{uc}$ (kN)**		
								Concrete compressive strength, $f'_c$		
20 MPa	32 MPa	40 MPa								
10	14	90	135	270	115	31.4	21.4	20.4	21.2	21.8
12	16	110	165	330	140	45.2	30.8	29.9	31.1	32.0
16	20	125	187	375	160	80.4	54.8	38.2	43.6	44.8
20	25	150	225	450	190	125.6	85.7	50.2	63.5	67.2
		170	255	510	215			60.5	74.1	76.2
24	32	180	270	540	215	180.8	123.3	66.0	83.5	92.7
		210	315	630	275			83.1	105.2	116.8
32	40	240	360	720	320	321.6	219.3	101.5	111.5	114.7
		300	450	900	380			134.0	139.4	143.4

\* Note: For shear loads acting towards an edge or where these optimum dimensions are not achievable, please use the simplified strength limit state design process to verify capacity.

\*\*Note: Reduced characteristic ultimate concrete tensile capacity =  $\phi N_{uc}$  where  $\phi = 0.56$  and  $N_{uc}$  = Characteristic ultimate concrete tensile capacity.

For conversion to Working Load Limit MULTIPLY  $\phi N_{uc} \times 0.6$

\*\*\*Note: Reduced characteristic ultimate steel tensile capacity =  $\phi N_{us}$  where  $\phi = 0.8$  and  $N_{us}$  = Characteristic ultimate steel tensile capacity .

For conversion to Working Load Limit MULTIPLY  $\phi N_{us} \times 0.56$

#Note: Design Tensile Capacity  $\phi N_{us}$  = minimum of  $\phi N_{uc}$  and  $\phi N_{us}$

For Cracked Concrete performance, please use the simplified strength limit state design process to verify capacity.

Data is based on a Service temperature limit of -40°C to +70°C

All data relevant for Dry, Wet and Flooded Holes

For optimised performance data, please use Ramset iExpert Anchoring Software.

### DESCRIPTION AND PART NUMBERS

Description	Cartridge Size	Part No.
ChemSet Reo 502 PLUS	600ml	RE0502P600

### Typical Engineering Properties of Grade 500 Reinforcing Bar

Rebar Size	10	12	16	20	24	32
Drilled Hole Dia, $d_h$ (mm)	14	16	20	25	32	40
Stress Area, $A_s$ (mm <sup>2</sup> )	78.5	113	201	314	491	804
Yield Stress, $f_{sy}$ (MPa)	500	500	500	500	500	500
Tensile Steel Yield Capacity, $N_{sy}$ (kN)	39.3	56.5	100.5	157.0	226.0	402.0

For further information refer to reinforcing bar manufacturer's published information and current revision of AS/NZS 4671

# ChemSet™ Reo 502™ PLUS

CHEMICAL INJECTION - NON-CRACKED & CRACKED CONCRETE

AVAILABLE IN AUSTRALIA ONLY

Chemical Anchoring - Reinforcing Bar Anchorage

## STEP 1

### Select anchor to be evaluated

Table 1a Indicative combined loading - interaction diagram

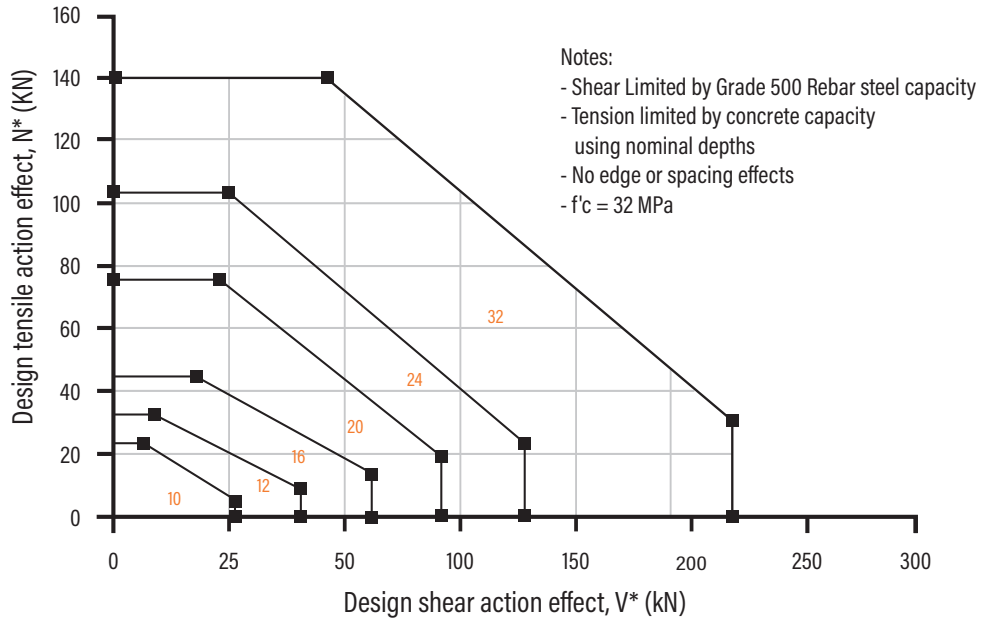


Table 1b Absolute minimum edge distance and anchor spacing values, e<sub>m</sub> and a<sub>m</sub> (mm)

Rebar size, db	10	12	16	20	24	32
e <sub>m</sub> , a <sub>m</sub>	40	40	40	50	50	70

### Step 1c Calculate anchor effective depth, h (mm)

Refer to nominal recommended effective depths, h, listed in installation and performance details table on previous page.

Effective depth, h (mm)

Preferred  $h = h_n$  otherwise,

$h = L_e - t$

t = total thickness of material(s) being fastened.

Substrate thickness b <sub>m</sub> (mm)			
Anchor Stud Size (mm)			
10	12	16	20
h + 30mm ≥ 100mm		h + (2 x d <sub>n</sub> )	

## Checkpoint 1

Anchor size determined, absolute minima compliance achieved, effective depth (h) calculated.

# ChemSet™ Reo 502™ PLUS

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN AUSTRALIA ONLY

Chemical Anchoring - Reinforcing Bar Anchorage

## STEP 2 Verify concrete tensile capacity - per anchor

Table 2a Reduced characteristic ultimate concrete tensile capacity,  $\phi N_{uc}$  (kN),  $\phi_c = 1/1.8 = 0.56$ ,  $f'_c = 32$  MPa

Rebar Size, $d_b$	Combined pull-out and concrete cone resistance - $\phi N_{ucp}$						Concrete Cone Resistance - $\phi N_{ucc}$
	10	12	16	20	24	32	
Drilled Hole Dia, $d_h$ (mm)	14	16	20	25	32	40	
Effective Depth, $h$ (mm)							
70	16.5						20.2
80	18.9						24.7
90	<b>21.2</b>	25.5					29.5
100	23.6	28.3					34.6
110	26.0	<b>31.1</b>					39.9
120	28.3	34.0	41.8				45.4
125	29.5	35.4	<b>43.6</b>				48.3
140	33.0	39.6	48.8				57.3
150	35.4	42.5	52.3	65.3			63.5
160	37.8	45.3	55.8	69.7			70.0
170	40.1	48.1	59.2	<b>74.1</b>			76.6
180	42.5	51.0	62.7	78.4	94.1		83.5
190	44.8	53.8	66.2	82.8	99.3		90.5
200	47.2	56.6	69.7	87.1	104.6		97.8
210		59.5	73.2	91.5	<b>109.8</b>		105.2
240		68.0	83.6	104.6	125.5	111.5	128.5
270			94.1	117.6	141.1	125.5	153.4
280			97.6	122.0	146.4	130.1	162.0
300			104.6	130.7	156.8	<b>139.4</b>	179.6
320			111.5	139.4	167.3	148.7	197.9
350				152.5	183.0	162.6	226.4
400				174.3	209.1	185.9	276.6
450					235.2	209.1	330.0
500					261.4	232.3	386.5
560						260.2	458.1
640						297.4	559.7

For optimised performance data, please use Ramset iExpert Anchoring Software.

Table 2a-2 Cracked Concrete effect, tension,  $X_{ncr}$

Rebar Size, $d_b$	Cracked Concrete Effect - $X_{ncr}$						$X_{ncr}$ where $\phi N_{uc} = \phi N_{ucc}$ (from Table 2a)
	10	12	16	20	24	32	
$f'_c$ (MPa)							
20 to 50	0.85	0.77	0.83	0.83	0.71	0.81	0.70

Bold values are at Chemset Anchor Stud nominal Depths

For Sustained Loads MULTIPLY  $\phi N_{uc}$  x 0.6 (100 years) or  $\phi N_{uc}$  x 0.72 (50 years)

All data relevant for Dry, Wet and Flooded Holes

For Non-cracked concrete  $X_{ncr} = 1.0$

Calculate  $\phi N_{uc}$  for both  $\phi N_{ucp}$  and  $\phi N_{ucc}$  then choose the minimum - Refer to Checkpoint 2

Table 2b-1 Concrete service temperature limits effect, tension,  $X_{ns}$

Rebar Size, $d_b$	Service temperature limits effect, tension, $X_{ns}$						$X_{ns}$ where $\phi N_{uc} = \phi N_{ucc}$ (from Table 2a)
	10	12	16	20	24	32	
Service temperature (°C)							
-40°C to +70°C				1.00			1.00

Table 2b-2 Concrete compressive strength effect, tension,  $X_{nc}$


Rebar Size, $d_b$	Cracked & Non-Cracked Concrete - $X_{nc}$						$X_{nc}$ where $\phi N_{uc} = \phi N_{ucc}$ (from Table 2a)
	10	12	16	20	24	32	
$f'_c$ (MPa)							
20	0.96	0.96	0.96	0.96	0.96	0.96	0.79
25	0.98	0.98	0.98	0.98	0.98	0.98	0.88
32	1.00	1.00	1.00	1.00	1.00	1.00	1.00
40	1.03	1.03	1.03	1.03	1.03	1.03	1.12
50	1.05	1.05	1.05	1.05	1.05	1.05	1.25

# ChemSet™ Reo 502™ PLUS

## STRENGTH LIMIT STATE DESIGN

AVAILABLE IN AUSTRALIA ONLY

Chemical Anchoring - Reinforcing Bar Anchorage



$$X_{ne} = 0.25 + 0.5*(e/h)$$


Where  $e_m \leq e \leq e_c$

$$e_c = 1.5*h$$

Note: Tabled values are based on the nominal effective depth, h shown in the installation details. For other values of  $X_{ne}$ , please use equation shown above.

Table 2c - Concrete Edge distance effect, tension,  $X_{ne}$

Anchor size, $d_b$	10	12	16	20	24	32
Edge distance, e (mm)						
40	0.47	0.43	0.41			
45	0.50	0.45	0.43			
50	0.53	0.48	0.45	0.40	0.36	
55	0.56	0.50	0.47	0.41	0.38	
65	0.61	0.55	0.51	0.44	0.40	
70	0.64	0.57	0.53	0.46	0.42	0.36
80	0.69	0.61	0.57	0.49	0.44	0.38
100	0.81	0.70	0.65	0.54	0.49	0.41
115	0.89	0.77	0.71	0.59	0.52	0.44
135	1	0.86	0.79	0.65	0.57	0.47
165		1	0.91	0.74	0.64	0.52
187			1	0.80	0.70	0.56
255				1	0.86	0.67
315					1	0.77
450						1



$$X_{na} = 0.5 + a/(6*h)$$

Where  $a_m \leq a \leq a_c$

$$a_c = 3*h$$

Note: Tabled values are based on the nominal effective depth, h shown in the installation details. For other values  $X_{na}$ , please use equation shown above.

Table 2d - Concrete anchor spacing effect, tension,  $X_{na}$

Anchor size, $d_b$	10	12	16	20	24	32
Anchor spacing, a (mm)						
40	0.57	0.56	0.55			
45	0.58	0.57	0.56			
50	0.59	0.58	0.57	0.55	0.53	
55	0.60	0.58	0.57	0.55	0.54	
70	0.62	0.60	0.59	0.56	0.55	0.53
85	0.66	0.63	0.61	0.58	0.57	0.54
100	0.69	0.65	0.63	0.60	0.58	0.55
125	0.73	0.69	0.67	0.62	0.60	0.56
150	0.78	0.73	0.70	0.65	0.62	0.58
200	0.87	0.80	0.77	0.70	0.66	0.61
270	1	0.91	0.86	0.76	0.71	0.65
330		1	0.94	0.82	0.76	0.68
375			1	0.87	0.80	0.70
510				1	0.90	0.78
630					1	0.85
900						1

**Checkpoint 2**

Design reduced ultimate concrete tensile capacity,  $\phi N_{urc}$

$$\phi N_{urc} = \text{minimum of } \phi N_{ucp} * X_{ncr} * X_{ns} * X_{nc} * X_{ne} * X_{na} \text{ and } \phi N_{ucc} * X_{ncr} * X_{ns} * X_{nc} * X_{ne} * X_{na}$$

**STEP 3**

**Verify anchor tensile capacity - per anchor**

Table 3a Reduced characteristic ultimate steel tensile capacity,  $\phi N_{us}$  (kN), where  $\phi = 0.8$

Anchor size, $d_b$	10	12	16	20	24	32
Gr 500 Rebar	31.4	45.2	80.4	125.6	180.8	321.6

**Checkpoint 3**

Design reduced ultimate tensile capacity,  $\phi N_{ur}$

$$\phi N_{ur} = \text{minimum of } \phi N_{urc} \text{ and } \phi N_{us}$$

Check  $N^*/\phi N_{ur} \leq 1.0$ ,

if not satisfied return to step 1

# ChemSet™ Reo 502™ PLUS

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN AUSTRALIA ONLY

Chemical Anchoring - Reinforcing Bar Anchorage

## STEP 4 Step 4 - Verify Concrete shear capacity - per anchor

Table 4a-1 Reduced characteristic ultimate concrete edge shear capacity,  $\phi V_{uc}$  (kN),  $\phi = 1/1.5 = 0.67$ ,  $f'_c = 32$  MPa

Rebar size, $d_b$	10	12	16	20	24	32
Effective depth, $h$ (mm)	70-200	90-240	120-320	150-400	180-500	240-640
Edge distance, $e$						
40	4.3	4.7	5.5			
50				8.2	9.2	
70						16.1

For optimised performance data, please use Ramset iExpert Anchoring Software.


Table 4a-2 Cracked Concrete effect, shear,  $X_{vcr}$

Anchor size, $d_b$	10	12	16	20	24	32
$X_{vcr}$	0.70					

For Non-cracked concrete  $X_{vcr} = 1.0$

Table 4b - Concrete compressive strength effect, shear,  $X_{vc}$


$f'_c$ (MPa)	20	25	32	40	50
$X_{vc}$	0.79	0.86	1	1.11	1.22



Load direction effect, conc. edge shear,  $X_{vd}$

Table 4c - Concrete load direction effect, concrete edge shear,  $X_{vd}$

Angle, $\alpha^\circ$	0-55	60	70	80	90-180
$X_{vd}$	1	1.1	1.2	1.5	2




$$X_{ve} = e/e_m * \sqrt{e/e_m}$$

Table 4d - Concrete anchor spacing and edge distance effect, concrete edge shear,  $X_{ve}$

For single anchor fastening  $X_{ve}$


$e/e_m$	1.0	1.2	1.4	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0	3.2
$X_{ve}$	1.00	1.31	1.66	2.02	2.41	2.83	3.26	3.72	4.19	4.69	5.20	5.72



$$X_{ve} = \frac{3*e+a}{6*e_m} * \sqrt{e/e_m}$$

For 2 anchors fastening  $X_{ve}$

$e/e_m$	1.0	1.2	1.4	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0	3.2
$a/e_m$												
1.0	0.67	0.84	1.03	1.22	1.43	1.65	1.88	2.12	2.36	2.62	2.89	3.16
1.5	0.75	0.93	1.12	1.33	1.54	1.77	2.00	2.25	2.50	2.76	3.03	3.31
2.0	0.83	1.02	1.22	1.43	1.65	1.89	2.12	2.38	2.63	2.90	3.18	3.46
2.5	0.92	1.11	1.32	1.54	1.77	2.00	2.25	2.50	2.77	3.04	3.32	3.61
3.0	1.00	1.20	1.42	1.64	1.88	2.12	2.37	2.63	2.90	3.18	3.46	3.76
3.5		1.30	1.52	1.75	1.99	2.24	2.50	2.76	3.04	3.32	3.61	3.91
4.0			1.62	1.86	2.10	2.36	2.62	2.89	3.17	3.46	3.75	4.05
4.5				1.96	2.21	2.47	2.74	3.02	3.31	3.60	3.90	4.20
5.0					2.33	2.59	2.87	3.15	3.44	3.74	4.04	4.35
5.5						2.71	2.99	3.28	3.71	4.02	4.33	4.65
6.0						2.83	3.11	3.41	3.71	4.02	4.33	4.65



For 3 anchors fastening and more

$$X_{ve} = \frac{3*e + a_1 + a_2 + a_3 + \dots + a_{n-1}}{3*n*e_m} * \sqrt{e/e_m}$$

# ChemSet™ Reo 502™ PLUS

## STRENGTH LIMIT STATE DESIGN

AVAILABLE IN AUSTRALIA ONLY

Chemical Anchoring - Reinforcing Bar Anchorage

Table 4e Reduced characteristic ultimate concrete pryout capacity,  $\phi V_{ucp}$  (kN),  $\phi = 1/1.5 = 0.67$ ,  $f'_c = 32$  MPa

Rebar size, $d_b$	10	12	16	20	24	32
Effective depth, h (mm)	90	110	125	170	210	300
-40 °C to +70 °C	40.8	59.9	83.8	142.4	211.1	268.1




Table 4f Anchor at a corner effect, concrete edge shear,  $X_{VS}$

Note: For  $e_1/e_2 > 1.25$ ,  $X_{VS} = 1.0$

Edge distance, $e_2$ (mm)	25	30	35	50	60	75	125	200	300	400	600	900
Edge distance, $e_1$ (mm)												
25	0.86	0.77	0.70	0.58	0.53	0.49	0.41	0.37	0.35	0.34	0.32	0.32
30	0.97	0.86	0.78	0.64	0.58	0.52	0.43	0.38	0.36	0.34	0.33	0.32
35	1.00	0.95	0.86	0.69	0.63	0.56	0.46	0.40	0.37	0.35	0.33	0.32
50	1.00	1.00	1.00	0.86	0.77	0.67	0.52	0.44	0.39	0.37	0.35	0.33
60	1.00	1.00	1.00	0.97	0.86	0.75	0.57	0.47	0.41	0.38	0.36	0.34
75	1.00	1.00	1.00	1.00	1.00	0.86	0.64	0.51	0.44	0.41	0.37	0.35
125	1.00	1.00	1.00	1.00	1.00	1.00	0.86	0.65	0.53	0.48	0.42	0.38
200	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.86	0.67	0.58	0.49	0.42
300	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.86	0.72	0.58	0.49
400	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.86	0.67	0.55
500	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.77	0.61
600	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.86	0.67
900	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.86

Checkpoint **4a**

Design reduced ultimate concrete edge shear capacity,  $\phi V_{urc}$

$$\phi V_{urc} = \phi V_{uc} * X_{vcr} * X_{vc} * X_{vd} * X_{ve} * X_{vs}$$

Checkpoint **4b**

Design reduced ultimate concrete pryout capacity,  $\phi V_{urcp}$

$$\phi V_{urcp} = \phi V_{ucp} * X_{ncr} * X_{nc} * X_{ne} * X_{na}$$

STEP **5**

### Verify anchor shear capacity - per anchor

Table 5a Reduced characteristic ultimate steel shear capacity,  $\phi V_{usr}$  (kN) where  $\phi_v = 0.80$

Anchor size, $d_b$	10	12	16	20	24	32
Gr 500 Rebar	21.4	30.8	54.8	85.7	123.3	219.3

Checkpoint **5**

Design reduced ultimate shear capacity,  $\phi V_{ur}$

$$\phi V_{ur} = \text{minimum of } \phi V_{urc}, \phi V_{urcp}, \phi V_{usr}$$

Check  $V^*/\phi V_{ur} \leq 1.0$ , if not satisfied return to step 1

# ChemSet™ Reo 502™ PLUS

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN AUSTRALIA ONLY

Chemical Anchoring - Reinforcing Bar Anchorage

## STEP 6 Combined loading and specification

### Checkpoint 6

Check  
 $N^*/\phi N_{ur} + V^*/\phi V_{ur} \leq 1.2,$   
 if not satisfied return to step 1

**Specify - Reinforcing Bar Anchorage**

Ramset™ ChemSet™ Reo 502™ PLUS with (Anchor Size) grade 500 Rebar.  
 Drilled hole depth to be (h) mm.

**Example**

Ramset™ ChemSet™ Reo 502™ PLUS with 16mm grade 500 Rebar  
 Drilled hole depth to be 125 mm.  
 To be installed in accordance with Ramset™ Installation Instructions.

Ramset™ iExpert Anchor Software for optimised calculation or where a greater range of anchor layout detail is needed.