

ChemSet™ EPCON™ G5 Xtrem™

CHEMICAL INJECTION - NON-CRACKED & CRACKED CONCRETE

AVAILABLE IN NEW ZEALAND ONLY

(Australia refer to ChemSet™ Reo502™ Xtrem™ range)

GENERAL INFORMATION

| Performance Related | Material Specification | Installation Related |
|---------------------|------------------------|----------------------|
| | | |

Product

Chemset™ EPCON™ G5 Xtrem™ is a heavy duty pure Epoxy for anchoring threaded studs and reinforcing bar into cracked and uncracked concrete.

Compliance

European Technical Assessment (option 1) - ETA-25/0648

Design according to:

- EN 1992-4 (formerly ETAG001 Annex C, E & TR045)
- Use enclosed data for simplified calculation method

Use Ramset™ iExpert Anchor Software for optimised calculation or where a greater range of anchor layout detail is needed.

Benefits, Advantages and Features

- 100 year working Life

Greater productivity:

- Anchors in dry, damp, wet or flooded holes

Greater security:

- Strong bond
- Rated for sustained loading


Versatile:

- Anchors in carbide drilled and diamond drilled holes
- Cold and temperate climates

Greater safety:

- Low odour
- VOC Compliant
- Suitable for contact with drinking water

Installation

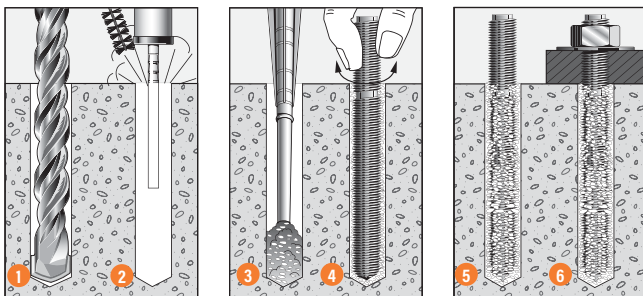

- Drill recommended diameter and depth hole.
- Important:** For hammer drilling technique clean dust and debris from hole with stiff wire brush and blower in the following sequence: blow x 2, brush x 2, blow x 2, brush x 2, blow x 2. For diamond drilling technique refer to **ETA-25/0648**.
- Screw mixing nozzle onto cartridge and dispense adhesive to waste until colour is orange. Insert mixing nozzle to bottom of hole. Fill hole to 2/3 the hole depth slowly, ensuring no air pockets form.
- Insert **Ramset™ ChemSet™ Anchor Stud/rebar** to bottom of hole while turning.
- Allow Chemset™ EPCON™ G5 Xtrem™ to cure as per setting times.
- Attach fixture.



Principal Applications

- Threaded Studs
- Starter Bars
- Threaded Inserts
- Over-head installation
- Steel Columns
- Hand Rails
- Road Stitching

Installation & Substrate Temperature Range

| Minimum | Maximum |
|---------|---------|
| 5°C | 40°C |

Service Temperature Limits

| |
|--------------------|
| T1: -40°C to +40°C |
| T2: -40°C to +60°C |
| T3: -40°C to +75°C |

Setting Times

| Temperature of base material | Gel Time | Curing time in dry concrete | Curing time in wet and flooded concrete |
|------------------------------|----------|-----------------------------|---|
| 5°C | 75 min | 30h | 60 h |
| 10°C | 45 min | 22h | 44 h |
| 15°C | 35 min | 14h | 28 h |
| 20°C | 22 min | 7h | 14 h |
| 25°C | 14 min | 5h | 10 h |
| 30°C | 8 min | 4h | 8 h |
| 35°C | 6 min | 3h | 6h |
| 40°C | 4 min | 2h 45min | 5h 30min |

ChemSet™ EPCON™ G5 Xtrem™

CHEMICAL INJECTION - NON-CRACKED & CRACKED CONCRETE

AVAILABLE IN NEW ZEALAND ONLY

Installation and performance details: ChemSet™ EPCON™ G5 Xtrem™ and ChemSet™ Anchor Studs

| Anchor size, d _b (mm) | Installation Details | | | | Optimum dimensions* | | |
|----------------------------------|--|--|--------------------------------|--|------------------------------------|-------------------------------------|---|
| | Drilled hole diameter, d _h (mm) | Fixture hole diameter, d _f (mm) | Anchor effective depth, h (mm) | Tightening torque, T _i (Nm) | Edge distance, e _c (mm) | Anchor spacing, a _c (mm) | Concrete substrate thickness, b _m (mm) |
| M10 | 12 | 12 | 90 | 20 | 135 | 270 | 120 |
| M12 | 14 | 14 | 110 | 30 | 165 | 330 | 140 |
| M16 | 18 | 18 | 125 | 60 | 187.5 | 375 | 160 |
| M20 | 25 | 22 | 150 | 120 | 225 | 450 | 190 |
| | | | 170 | | 255 | 510 | 220 |
| M24 | 28 | 26 | 160 | 150 | 240 | 480 | 200 |
| | | | 210 | | 315 | 630 | 270 |
| M30 | 35 | 33 | 280 | 180 | 420 | 840 | 350 |

* Note: For shear loads acting towards an edge or where these optimum dimensions are not achievable, please use the simplified strength limit state design process to verify capacity.

| Anchor size, d _b (mm) | Reduced Characteristic Capacity# | | | | | | | | |
|----------------------------------|----------------------------------|-----------------------------------|------------------------------|-----------------------------------|--------------------------------|-----------------------------------|--|--------|--------|
| | Grade 5.8 Steel Studs | | Grade 8.8 Steel Studs | | ANSI 316 Stainless Steel Studs | | Non-Cracked Concrete | | |
| | Shear, φV _{us} (kN) | Tension, φN _{us} (kN)*** | Shear, φV _{us} (kN) | Tension, φN _{us} (kN)*** | Shear, φV _{us} (kN) | Tension, φN _{us} (kN)*** | Tension, φN _{uc} (kN)** | | |
| | | | | | | | Concrete Compressive Strength, f' _c | | |
| | | | | | | | 20 MPa | 32 MPa | 40 MPa |
| M10 | 11.8 | 18.9 | 17.5 | 28.2 | 14.2 | 19.8 | 28.0 | 35.4 | 37.0 |
| M12 | 17.5 | 28.1 | 26.0 | 41.9 | 21.1 | 29.5 | 37.8 | 47.9 | 53.6 |
| M16 | 33.1 | 53.9 | 50.9 | 82.1 | 41.4 | 57.7 | 45.8 | 58.0 | 64.9 |
| M20 | 49.9 | 81.3 | 76.8 | 123.9 | 62.4 | 87.1 | 60.2 | 76.2 | 85.4 |
| | | | | | | | 72.6 | 91.9 | 103.0 |
| M24 | 72.3 | 117.8 | 111.3 | 179.5 | 90.4 | 126.2 | 66.3 | 84.0 | 94.0 |
| | | | | | | | 99.7 | 126.2 | 141.4 |
| M30 | - | - | 185.5 | 299.2 | - | - | 153.5 | 194.4 | 217.7 |

**Note: Reduced characteristic ultimate concrete tensile capacity = φN_{uc} and N_{uc} = Characteristic ultimate concrete tensile capacity. For value of φ refer to Table 2a

For conversion to Working Load Limit MULTIPLY φN_{uc} x 0.5

***Note: Reduced characteristic ultimate steel tensile capacity = φN_{us} where φ = 0.67 and N_{us} = Characteristic ultimate steel tensile capacity.

For conversion to Working Load Limit MULTIPLY φN_{us} x 0.67 for Gr 5.8 & Gr 8.8

#Note: Design Tensile Capacity φN_{ur} = minimum of φN_{uc} and φN_{us}

For Cracked Concrete performance, please use the simplified strength limit state design process to verify capacity.

Data is based on a Service temperature limit of -40°C to +40°C

All data relevant for Dry and Wet Holes. For Flooded Holes MULTIPLY φN_{uc} x 0.63

For optimised performance data, including performance based on diamond drilling technique, please use Ramset iExpert Anchoring Software.

DESCRIPTION AND PART NUMBERS

| Description | Cartridge Size | Part No. |
|---------------------------|----------------|----------|
| ChemSet™ EPCON™ G5 Xtrem™ | 600ml | CEG5X600 |

ENGINEERING PROPERTIES

ChemSet™ Anchor Studs and Threaded Rod

| Anchor Size, d _b | Grade 8.8 Threaded Rod | | | | Stainless Steel High Corrosion Resistance HCR Grade 1.4529/1.4565 Threaded Rod | | | | Section modulus Z (mm ³) |
|-----------------------------|-------------------------------------|----------------------------------|-----------------------------------|------------------------|--|----------------------------------|-----------------------------------|------------------------|--------------------------------------|
| | Shank diameter, d _s (mm) | Stressed Area (mm ²) | Yield Strength f _y MPa | UTS f _u MPa | Shank diameter, d _s (mm) | Stressed Area (mm ²) | Yield Strength f _y MPa | UTS f _u MPa | |
| M10 | 8.6 | 58 | 640 | 800 | 8.2 | 52.8 | 450 | 650 | 62.3 |
| M12 | 10.4 | 84.3 | 640 | 800 | 10 | 78.5 | 450 | 650 | 109.2 |
| M16 | 14.1 | 157 | 640 | 800 | 14 | 153.9 | 450 | 650 | 277.5 |
| M20 | 17.7 | 245 | 640 | 800 | 17.2 | 232.4 | 450 | 650 | 540.9 |
| M24 | 21.2 | 353 | 640 | 800 | 20.7 | 336.5 | 450 | 650 | 935.5 |
| M30 | 26.7 | 561 | 640 | 800 | - | - | - | - | - |

Refer to "Engineering Properties" for ChemSet™ Anchor Studs Grade 5.8 and AISI 316 Stainless Steel in the SARB ANZ.

ChemSet™ EPCON™ G5 Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN NEW ZEALAND ONLY

STEP 1 Select anchor to be evaluated

Table 1a Indicative combined loading - interaction diagram

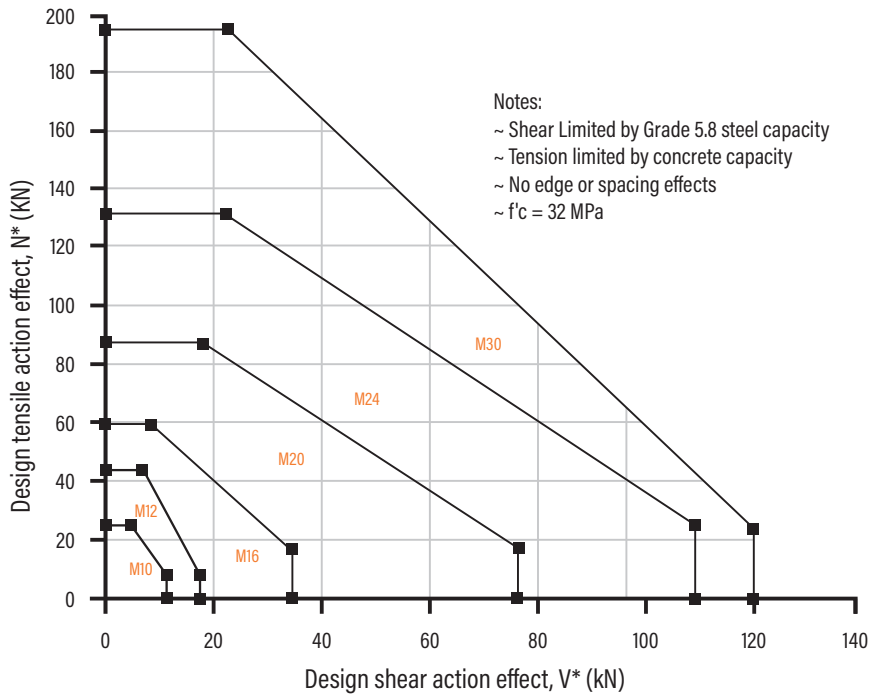


Table 1b Absolute minimum edge distance and anchor spacing values, e_m and a_m (mm)

| Anchor size, d_b | M10 | M12 | M16 | M20 | M24 | M30 |
|-----------------------------|-----|-----|-----|-----|-----|-----|
| Min. Anchor Spacing - a_m | 40 | 50 | 70 | 85 | 90 | 140 |
| Min. Edge Distance - e_m | 40 | 40 | 45 | 55 | 60 | 90 |

Step 1c Calculate anchor effective depth, h (mm)

Refer to "Description and Part Numbers" table for ChemSet Anchor Studs page in the SARB ANZ on page 141.

| | | | |
|--|-------------------------------------|-----|----------------------|
| Effective depth, h (mm) Preferred $h = h_n$ otherwise, $h = L_e - t$ t = total thickness of material(s) being fastened. | Substrate thickness b_m (mm) | | |
| | Anchor Stud Size (mm) | | |
| | M10 | M12 | M16 to M30 |
| | $h + 30\text{mm} \geq 100\text{mm}$ | | $h + (2 \times d_b)$ |

Checkpoint 1 Anchor size determined, absolute minima compliance achieved, effective depth (h) calculated.

ChemSet™ EPCON™ G5 Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN NEW ZEALAND ONLY

STEP 2

Verify concrete tensile capacity - per anchor

Table 2a Reduced characteristic ultimate concrete tensile capacity, ϕN_{uc} (kN), $\phi_c = 1/1.5 = 0.67$, $f'_c = 32$ MPa

| Anchor Size, d_b | Combined pull-out and concrete cone resistance - ϕN_{ucp} | | | | | | Concrete Cone Resistance - ϕN_{ucc} |
|------------------------------|---|-------------|-------------|--------------|--------------|--------------|---|
| | M10 | M12 | M16 | M20 | M24 | M30 | |
| Drilled Hole Dia, d_h (mm) | 12 | 14 | 18 | 25 | 28 | 35 | |
| Effective Depth, h (mm) | | | | | | | |
| 70 | 27.5 | | | | | | 24.3 |
| 80 | 31.5 | | | | | | 29.7 |
| 90 | 35.5 | 40.5 | | | | | 35.4 |
| 100 | 39.3 | 45.0 | | | | | 41.5 |
| 110 | 43.3 | 49.5 | 64.1 | | | | 47.9 |
| 120 | 47.2 | 54.0 | 69.9 | | | | 54.5 |
| 125 | 49.2 | 56.3 | 72.8 | | | | 58.0 |
| 140 | 55.1 | 63.0 | 81.6 | | | | 68.7 |
| 150 | 59.0 | 67.5 | 87.4 | 102.7 | | | 76.2 |
| 160 | 63.0 | 72.0 | 93.2 | 109.6 | 131.0 | | 84.0 |
| 170 | 66.9 | 76.5 | 99.0 | 116.4 | 139.2 | | 91.9 |
| 180 | 70.8 | 81.0 | 104.9 | 123.3 | 147.4 | | 100.2 |
| 190 | 74.8 | 85.5 | 110.7 | 130.1 | 155.6 | | 108.6 |
| 200 | 78.7 | 90.0 | 116.5 | 137.0 | 163.8 | | 117.3 |
| 210 | | 94.4 | 122.4 | 143.8 | 172.0 | 202.2 | 126.2 |
| 240 | | 108.0 | 139.8 | 164.4 | 196.5 | 231.1 | 154.2 |
| 280 | | | 163.1 | 191.8 | 229.3 | 269.6 | 194.4 |
| 320 | | | 186.4 | 219.2 | 262.1 | 308.2 | 237.5 |
| 350 | | | | 239.7 | 286.6 | 337.1 | 271.6 |
| 400 | | | | 274.0 | 327.6 | 385.2 | 331.9 |
| 450 | | | | | 368.5 | 433.4 | 396.0 |
| 480 | | | | | 393.1 | 462.2 | 436.3 |
| 550 | | | | | | 529.7 | 535.1 |
| 600 | | | | | | 577.8 | 609.7 |

For optimised performance data, including performance based on diamond drilling technique, please use Ramset iExpert Anchoring Software.

Table 2a-2 Cracked Concrete effect, tension, X_{ncr}

| Anchor Size, d_b | Cracked Concrete Effect - X_{ncr} | | | | | | X_{ncr} where $\phi N_{uc} = \phi N_{ucc}$ (from Table 2a) |
|--------------------|--|------|------|------|------|------|--|
| | where $\phi N_{uc} = \phi N_{ucp}$ (from Table 2a) | | | | | | |
| f'_c (MPa) | | | | | | | |
| 20 to 50 | 0.36 | 0.53 | 0.57 | 0.65 | 0.63 | 0.68 | 0.70 |

Bold values are at Chemset Anchor Stud nominal Depths. For Sustained Loads MULTIPLY ϕN_{uc} x 0.72 (100 years). All data relevant for Dry and Wet Holes. For Flooded Holes MULTIPLY ϕN_{uc} x 0.63 For Non-cracked concrete $X_{ncr} = 1$.

Calculate ϕN_{uc} for both ϕN_{ucp} and ϕN_{ucc} then choose the minimum - Refer to Checkpoint 2

Table 2b-1 Concrete service temperature limits effect, tension, X_{ts}

| Anchor Size, d_b | Service temperature limits effect, tension, X_{ts} | | | | | | X_{ts} where $\phi N_{uc} = \phi N_{ucc}$ (from Table 2a) |
|--------------------------|--|-----|-----|------|-----|-----|---|
| | M10 | M12 | M16 | M20 | M24 | M30 | |
| Service temperature (°C) | | | | | | | |
| T1: -40°C to +40°C | | | | 1.00 | | | 1.00 |
| T2: -40°C to +60°C | | | | 0.84 | | | |
| T3: -40°C to +75°C | | | | 0.26 | | | |

Table 2b-2 Concrete compressive strength effect, tension, X_{nc}

| NON-CRACKED | Non-Cracked Concrete - X_{nc} | | | | | | X_{nc} where $\phi N_{uc} = \phi N_{ucc}$ (from Table 2a) |
|--------------------|--|------|------|------|------|------|---|
| | where $\phi N_{uc} = \phi N_{ucp}$ (from Table 2a) | | | | | | |
| Anchor Size, d_b | | | | | | | |
| f'_c (MPa) | | | | | | | |
| 20 | 0.91 | 0.91 | 0.87 | 0.87 | 0.83 | 0.83 | 0.79 |
| 25 | 0.95 | 0.95 | 0.93 | 0.93 | 0.91 | 0.91 | 0.88 |
| 32 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| 40 | 1.05 | 1.05 | 1.07 | 1.07 | 1.09 | 1.09 | 1.12 |
| 50 | 1.09 | 1.09 | 1.14 | 1.14 | 1.20 | 1.20 | 1.25 |


| CRACKED | Cracked Concrete - X_{nc} | | | | | | X_{nc} where $\phi N_{uc} = \phi N_{ucc}$ (from Table 2a) |
|--------------------|--|------|------|------|------|------|---|
| | where $\phi N_{uc} = \phi N_{ucp}$ (from Table 2a) | | | | | | |
| Anchor Size, d_b | | | | | | | |
| f'_c (MPa) | | | | | | | |
| 20 | 0.95 | 0.95 | 0.95 | 0.91 | 0.91 | 0.87 | 0.79 |
| 25 | 0.98 | 0.98 | 0.98 | 0.95 | 0.95 | 0.93 | 0.88 |
| 32 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| 40 | 1.02 | 1.02 | 1.02 | 1.05 | 1.05 | 1.07 | 1.12 |
| 50 | 1.05 | 1.05 | 1.05 | 1.09 | 1.09 | 1.14 | 1.25 |

ChemSet™ EPCON™ G5 Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN NEW ZEALAND ONLY

Chemical Anchoring - Anchor Studs



$$X_{ne} = 0.25 + 0.5 \cdot (e/h)$$


Where $e_m \leq e \leq e_c$

$$e_c = 1.5 \cdot h$$

Note: Tabled values are based on the nominal effective depth, h shown in the installation details. For other values of X_{ne} , please use equation shown above.

Table 2c - Concrete Edge distance effect, tension, X_{ne}

| Anchor size, d_b | M10 | M12 | M16 | M20 | M24 | M30 |
|------------------------------|------|------|------|------|------|------|
| Edge distance, e (mm) | | | | | | |
| 40 | 0.47 | 0.43 | | | | |
| 45 | 0.50 | 0.45 | 0.43 | | | |
| 50 | 0.53 | 0.48 | 0.45 | | | |
| 55 | 0.56 | 0.50 | 0.47 | 0.41 | | |
| 60 | 0.58 | 0.52 | 0.49 | 0.43 | 0.39 | |
| 65 | 0.61 | 0.55 | 0.51 | 0.44 | 0.40 | |
| 70 | 0.64 | 0.57 | 0.53 | 0.46 | 0.42 | |
| 90 | 0.75 | 0.66 | 0.61 | 0.51 | 0.46 | 0.41 |
| 100 | 0.81 | 0.70 | 0.65 | 0.54 | 0.49 | 0.43 |
| 115 | 0.89 | 0.77 | 0.71 | 0.59 | 0.52 | 0.46 |
| 135 | 1 | 0.86 | 0.79 | 0.65 | 0.57 | 0.49 |
| 165 | | 1 | 0.91 | 0.74 | 0.64 | 0.54 |
| 187 | | | 1 | 0.80 | 0.70 | 0.58 |
| 255 | | | | 1 | 0.86 | 0.71 |
| 315 | | | | | 1 | 0.81 |
| 420 | | | | | | 1 |



$$X_{na} = 0.5 + a/(6 \cdot h)$$

Where $a_m \leq a \leq a_c$

$$a_c = 3 \cdot h$$

Note: Tabled values are based on the nominal effective depth, h shown in the installation details. For other values X_{na} , please use equation shown above.

Table 2d - Concrete anchor spacing effect, tension, X_{na}

| Anchor size, d_b | M10 | M12 | M16 | M20 | M24 | M30 |
|-------------------------------|------|------|------|------|------|------|
| Anchor spacing, a (mm) | | | | | | |
| 40 | 0.57 | | | | | |
| 45 | 0.58 | | | | | |
| 50 | 0.59 | 0.58 | | | | |
| 55 | 0.60 | 0.58 | | | | |
| 60 | 0.61 | 0.59 | | | | |
| 70 | 0.63 | 0.61 | 0.59 | | | |
| 85 | 0.66 | 0.63 | 0.61 | 0.58 | | |
| 90 | 0.67 | 0.64 | 0.62 | 0.59 | 0.57 | |
| 140 | 0.76 | 0.71 | 0.69 | 0.64 | 0.61 | 0.58 |
| 170 | 0.81 | 0.76 | 0.73 | 0.67 | 0.63 | 0.60 |
| 200 | 0.87 | 0.80 | 0.77 | 0.70 | 0.66 | 0.62 |
| 270 | 1 | 0.91 | 0.86 | 0.76 | 0.71 | 0.66 |
| 330 | | 1 | 0.94 | 0.82 | 0.76 | 0.70 |
| 375 | | | 1 | 0.87 | 0.80 | 0.72 |
| 510 | | | | 1 | 0.90 | 0.80 |
| 630 | | | | | 1 | 0.88 |
| 840 | | | | | | 1 |

Checkpoint 2

Design reduced ultimate concrete tensile capacity, ϕN_{urc}

$$\phi N_{urc} = \text{minimum of } \phi N_{ucp} * X_{ncr} * X_{ns} * X_{nc} * X_{ne} * X_{na} \text{ and } \phi N_{ucc} * X_{ncr} * X_{ns} * X_{nc} * X_{ne} * X_{na}$$

STEP 3

Verify anchor tensile capacity - per anchor

Table 3a Reduced characteristic ultimate steel tensile capacity, ϕN_{us} (kN) where $\phi_n = 0.67$ for Gr 5.8 & Gr 8.8

| Anchor size, d_b | M10 | M12 | M16 | M20 | M24 | M30 |
|---|------|------|------|-------|-------|-------|
| ChemSet™ Anchor Stud Grade 5.8 Carbon Steel | 18.9 | 28.1 | 53.9 | 81.3 | 117.8 | - |
| ChemSet™ Anchor Stud A4/316 Stainless Steel | 19.8 | 29.5 | 57.7 | 87.1 | 126.2 | - |
| ChemSet™ Anchor Stud Grade 8.8 Carbon Steel | 28.2 | 41.9 | 82.1 | 123.9 | 179.5 | 299.2 |

Note $\phi_n = 0.58$ for ChemSet™ Anchor Stud A4/316 Stainless Steel

Checkpoint 3

Design reduced ultimate tensile capacity, ϕN_{ur}

$$\phi N_{ur} = \text{minimum of } \phi N_{urc} \text{ or } \phi N_{us}$$

Check $N^*/\phi N_{ur} \leq 1.0$,

if not satisfied return to step 1

ChemSet™ EPCON™ G5 Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN NEW ZEALAND ONLY

Chemical Anchoring - Anchor Studs

STEP 4

Step 4 - Verify concrete shear capacity - per anchor

Table 4a - 1 Reduced characteristic ultimate concrete edge shear capacity, ϕV_{uc} (kN), $\phi = 1/1.5 = 0.67$, $f'_c = 32$ MPa


| Anchor size, d_b | M10 | M12 | M16 | M20 | M24 | M30 |
|---------------------------|----------|----------|-----------|-----------|-----------|-----------|
| Effective depth, h (mm) | 70 - 200 | 90 - 240 | 110 - 320 | 150 - 400 | 160 - 480 | 210 - 600 |
| Edge distance, e_m | | | | | | |
| 40 | 4.3 | 4.7 | | | | |
| 45 | | | 6.2 | | | |
| 55 | | | | 9.1 | | |
| 60 | | | | | 10.8 | |
| 90 | | | | | | 20.0 |

For optimised performance data, please use Ramset iExpert Anchoring Software.

Table 4a-2 Cracked Concrete effect, shear, X_{ver}

| Anchor size, d_b | M10 | M12 | M16 | M20 | M24 | M30 |
|--------------------|------|-----|-----|-----|-----|-----|
| X_{ver} | 0.70 | | | | | |

For Non-cracked concrete $X_{ver} = 1.0$




Load direction effect, conc. edge shear, X_{vd}

Table 4b - Concrete compressive strength effect, shear, X_{vc}

| f'_c (MPa) | 20 | 25 | 32 | 40 | 50 |
|--------------|------|------|----|------|------|
| X_{vc} | 0.79 | 0.86 | 1 | 1.11 | 1.22 |

Table 4c - Concrete load direction effect, concrete edge shear, X_{vd}

| Angle, α° | 0-55 | 60 | 70 | 80 | 90-180 |
|-----------------------|------|-----|-----|-----|--------|
| X_{vd} | 1 | 1.1 | 1.2 | 1.5 | 2 |




$$X_{ve} = e/e_m * \sqrt{e/e_m}$$

Table 4d - Concrete anchor spacing and edge distance effect, concrete edge shear, X_{ve}

For single anchor fastening X_{ve}


| e/e_m | 1.0 | 1.2 | 1.4 | 1.6 | 1.8 | 2.0 | 2.2 | 2.4 | 2.6 | 2.8 | 3.0 | 3.2 |
|----------|------|------|------|------|------|------|------|------|------|------|------|------|
| X_{ve} | 1.00 | 1.31 | 1.66 | 2.02 | 2.41 | 2.83 | 3.26 | 3.72 | 4.19 | 4.69 | 5.20 | 5.72 |



$$X_{ve} = \frac{3 * e + a}{6 * e_m} * \sqrt{e/e_m}$$

For 2 anchors fastening X_{ve}

| e/e_m | 1.0 | 1.2 | 1.4 | 1.6 | 1.8 | 2.0 | 2.2 | 2.4 | 2.6 | 2.8 | 3.0 | 3.2 |
|---------|------|------|------|------|------|------|------|------|------|------|------|------|
| a/e_m | | | | | | | | | | | | |
| 1.0 | 0.67 | 0.84 | 1.03 | 1.22 | 1.43 | 1.65 | 1.88 | 2.12 | 2.36 | 2.62 | 2.89 | 3.16 |
| 1.5 | 0.75 | 0.93 | 1.12 | 1.33 | 1.54 | 1.77 | 2.00 | 2.25 | 2.50 | 2.76 | 3.03 | 3.31 |
| 2.0 | 0.83 | 1.02 | 1.22 | 1.43 | 1.65 | 1.89 | 2.12 | 2.38 | 2.63 | 2.90 | 3.18 | 3.46 |
| 2.5 | 0.92 | 1.11 | 1.32 | 1.54 | 1.77 | 2.00 | 2.25 | 2.50 | 2.77 | 3.04 | 3.32 | 3.61 |
| 3.0 | 1.00 | 1.20 | 1.42 | 1.64 | 1.88 | 2.12 | 2.37 | 2.63 | 2.90 | 3.18 | 3.46 | 3.76 |
| 3.5 | | 1.30 | 1.52 | 1.75 | 1.99 | 2.24 | 2.50 | 2.76 | 3.04 | 3.32 | 3.61 | 3.91 |
| 4.0 | | | 1.62 | 1.86 | 2.10 | 2.36 | 2.62 | 2.89 | 3.17 | 3.46 | 3.75 | 4.05 |
| 4.5 | | | | 1.96 | 2.21 | 2.47 | 2.74 | 3.02 | 3.31 | 3.60 | 3.90 | 4.20 |
| 5.0 | | | | | 2.33 | 2.59 | 2.87 | 3.15 | 3.44 | 3.74 | 4.04 | 4.35 |
| 5.5 | | | | | | 2.71 | 2.99 | 3.28 | 3.71 | 4.02 | 4.33 | 4.65 |
| 6.0 | | | | | | 2.83 | 3.11 | 3.41 | 3.71 | 4.02 | 4.33 | 4.65 |



For 3 anchors fastening and more

$$X_{ve} = \frac{3 * e + a_1 + a_2 + a_3 + \dots + a_{n-1}}{3 * n * e_m} * \sqrt{e/e_m}$$

ChemSet™ EPCON™ G5 Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN NEW ZEALAND ONLY

Table 4e Reduced characteristic ultimate concrete pryout capacity, ϕV_{ucp} (kN), $\phi = 1/1.5 = 0.67$, $f'_c = 32$ MPa

| Anchor size, d_b | M10 | M12 | M16 | M20 | M24 | M30 |
|-------------------------|------|------|-------|-------|-------|-------|
| Effective depth, h (mm) | 90 | 110 | 125 | 170 | 210 | 280 |
| -40°C to +40°C | 70.8 | 95.7 | 116.0 | 183.9 | 252.5 | 388.7 |
| -40°C to +60°C | 59.5 | 83.2 | 116.0 | 183.9 | 252.5 | 388.7 |
| -40°C to +75°C | 18.4 | 25.7 | 37.9 | 60.5 | 89.4 | 140.2 |




Table 4f Anchor at a corner effect, concrete edge shear, X_{vs}

Note: For $e_1/e_2 > 1.25$, $X_{vs} = 1.0$

| Edge distance, e_2 (mm) | 25 | 30 | 35 | 50 | 60 | 75 | 125 | 200 | 300 | 400 | 600 | 900 |
|---------------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| Edge distance, e_1 (mm) | | | | | | | | | | | | |
| 25 | 0.86 | 0.77 | 0.70 | 0.58 | 0.53 | 0.49 | 0.41 | 0.37 | 0.35 | 0.34 | 0.32 | 0.32 |
| 30 | 0.97 | 0.86 | 0.78 | 0.64 | 0.58 | 0.52 | 0.43 | 0.38 | 0.36 | 0.34 | 0.33 | 0.32 |
| 35 | 1.00 | 0.95 | 0.86 | 0.69 | 0.63 | 0.56 | 0.46 | 0.40 | 0.37 | 0.35 | 0.33 | 0.32 |
| 50 | 1.00 | 1.00 | 1.00 | 0.86 | 0.77 | 0.67 | 0.52 | 0.44 | 0.39 | 0.37 | 0.35 | 0.33 |
| 60 | 1.00 | 1.00 | 1.00 | 0.97 | 0.86 | 0.75 | 0.57 | 0.47 | 0.41 | 0.38 | 0.36 | 0.34 |
| 75 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.64 | 0.51 | 0.44 | 0.41 | 0.37 | 0.35 |
| 125 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.65 | 0.53 | 0.48 | 0.42 | 0.38 |
| 200 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.67 | 0.58 | 0.49 | 0.42 |
| 300 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.72 | 0.58 | 0.49 |
| 400 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.67 | 0.55 |
| 500 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.77 | 0.61 |
| 600 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.67 |
| 900 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 |

Checkpoint **4a**

Design reduced ultimate concrete edge shear capacity, ϕV_{urc}

$$\phi V_{urc} = \phi V_{uc} * X_{vcr} * X_{vc} * X_{vd} * X_{ve} * X_{vs}$$

Checkpoint **4b**

Design reduced ultimate concrete pryout capacity, ϕV_{urcp}

$$\phi V_{urcp} = \phi V_{ucp} * X_{ncr} * X_{nc} * X_{ne} * X_{na}$$

STEP **5**

Verify anchor shear capacity - per anchor

Table 5a Reduced characteristic ultimate steel shear capacity, ϕV_{us} (kN) where $\phi_v = 0.67$

| Anchor size, d_b | M10 | M12 | M16 | M20 | M24 | M30 |
|---|------|------|------|------|-------|-------|
| ChemSet™ Anchor Stud Grade 5.8 Carbon Steel | 11.8 | 17.5 | 33.1 | 49.9 | 72.3 | - |
| ChemSet™ Anchor Stud A4/316 Stainless Steel | 14.2 | 21.1 | 41.4 | 62.4 | 90.4 | - |
| ChemSet™ Anchor Stud Grade 8.8 Carbon Steel | 17.5 | 26.0 | 50.9 | 76.8 | 111.3 | 185.5 |

Checkpoint **5**

Design reduced ultimate shear capacity, ϕV_{ur}

$$\phi V_{ur} = \text{minimum of } \phi V_{urc} \phi V_{urcp} \phi V_{us}$$

Check $V^*/\phi V_{ur} \leq 1.0$,

if not satisfied return to step 1

ChemSet™ EPCON™ G5 Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN NEW ZEALAND ONLY

STEP 6 Combined Loading

Checkpoint 6

Check

$N^*/\phi N_{ur} + V^*/\phi V_{ur} \leq 1.2$,
if not satisfied return to step 1

Specify - Threaded Stud Anchors
Ramset™ EPCON™ G5 Xtrem™ with (Anchor Size) grade 5.8 Chemset™ Anchor Stud (Anchor Stud Part Number) Drilled Hole Depth to be (h) mm.

Example
Ramset™ EPCON™ G5 Xtrem™ Injection with M16 grade 5.8 Chemset™ Anchor Stud (CS16190GH). Drilled hole depth to be 125mm. To be installed according to Ramset™ Installation Instructions.

Ramset™ iExpert Anchor Software for optimised calculation or where a greater range of anchor layout detail is needed.