

SPECIFIERS ANCHORING RESOURCE BOOK

ChemSetTM EPCONTM G5 XtremTM



View our
products
online fast.

ramset.co.nz

For more information on our products go to
www.ramset.co.nz or call 0800 RAMSET (726738)

ChemSet™ EPCON™ G5 Xtrem™

SEISMIC ANCHOR STUDS - CHEMICAL INJECTION

AVAILABLE IN NEW ZEALAND ONLY

(Australia refer to ChemSet™ Reo502™ Xtrem™ range)

GENERAL INFORMATION

Performance Related

Material Specification

Installation Related



Seismic Anchors - ChemSet™ EPCON™ G5 Xtrem™ - Anchor Studs

Product

EPCON™ G5 Xtrem™ is a heavy duty pure Epoxy for anchoring threaded studs and reinforcing bar into cracked and uncracked concrete.



Compliance

European Technical Assessment (option 1) - ETA-25/0648

Design according to:

- NZS 1170.5 - Earthquake Actions
- EN 1992-4 (formerly ETAG001 Annex C, E & TR045)
- NZS 3101 (A3) Section 17 - Seismic Design C1 & C2
- Use enclosed data for simplified calculation method

Use Ramset™ iExpert Anchor Software for optimised calculation or where a greater range of anchor layout detail is needed.

Benefits, Advantages and Features

- 100 year working life
- Greater productivity:**
 - Anchors in dry, damp, wet or flooded holes
 - Easy dispensing even in cold weather
- Greater security:**
 - Strong bond
 - Rated for sustained loading
- Versatile:**
 - Anchors in carbide drilled and diamond drilled holes
 - Cold and temperate climates
- Greater safety:**
 - Low odour
 - VOC Compliant
 - Suitable for contact with drinking water



Principal Applications

- Threaded Studs
- Starter Bars
- Threaded Inserts
- Over-head installation
- Steel Columns
- Hand Rails
- Road Stitching


Recommended Installation Temperatures

| | Minimum | Maximum |
|-----------|---------|---------|
| Substrate | 5°C | 40°C |
| Adhesive | 5°C | 40°C |

Service Temperature Limits

| |
|--------------------|
| T1: -40°C to +40°C |
| T2: -40°C to +60°C |
| T3: -40°C to +75°C |

Installation

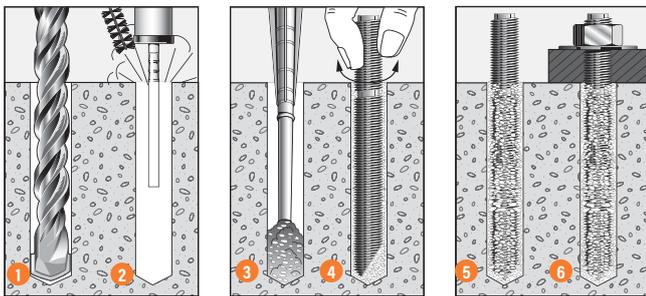

1. Drill recommended diameter and depth hole.
2. **Important:** For hammer drilling technique clean dust and debris from hole with stiff wire brush and blower in the following sequence: blow x 2, brush x 2, blow x 2, brush x 2, blow x 2. For diamond drilling technique refer to **ETA-25/0648**.
3. Screw mixing nozzle onto cartridge and dispense adhesive to waste until colour is orange. Insert mixing nozzle to bottom of hole. Fill hole to 2/3 the hole depth slowly, ensuring no air pockets form.
4. Insert Ramset™ ChemSet™ Anchor Stud/rebar to bottom of hole while turning.
5. Allow ChemSet™ EPCON™ G5 Xtrem™ to cure as per setting times.
6. Attach fixture.

Setting Times

| Temperature of base material | Gel Time | Curing time in dry concrete | Curing time in wet and flooded concrete |
|------------------------------|----------|-----------------------------|---|
| 5°C | 75 min | 30h | 60 h |
| 10°C | 45 min | 22h | 44 h |
| 15°C | 35 min | 14h | 28 h |
| 20°C | 22 min | 7h | 14 h |
| 25°C | 14 min | 5h | 10 h |
| 30°C | 8 min | 4h | 8 h |
| 35°C | 6 min | 3h | 6h |
| 40°C | 4 min | 2h 45min | 5h 30min |

ChemSet™ EPCON™ G5 Xtrem™

SEISMIC ANCHOR STUDS - CHEMICAL INJECTION

AVAILABLE IN NEW ZEALAND ONLY

Installation and performance details: ChemSet™ EPCON™ G5 Xtrem™ and ChemSet™ Anchor Studs

| Anchor size, d _b (mm) | Drilled hole diameter, d _h (mm) | Fixture hole diameter, d _f (mm) | Anchor effective depth, h _n (mm) | Tightening torque, T _r (Nm) | Optimum dimensions* | | Concrete substrate thickness, b _m (mm) | Seismic C1 & C2 Cracked Concrete reduced characteristic tensile capacity, N _{Rd,seis} (kN) ** | | | | | |
|----------------------------------|--|--|---|--|--------------------------------------|-------------------------------------|---|--|------|--------|------|--------|------|
| | | | | | Anchor* spacing, a _c (mm) | Edge* distance, e _c (mm) | | Concrete Compressive Strength, f _c | | | | | |
| | | | | | | | | 20 MPa | | 30 MPa | | 40 MPa | |
| | | | | | | | | C1 | C2 | C1 | C2 | C1 | C2 |
| M10 | 12 | 12 | 90 | 20 | 270 | 135 | 120 | 9.9 | 6.4 | 9.9 | 6.4 | 9.9 | 6.4 |
| M12 | 14 | 14 | 110 | 30 | 330 | 165 | 140 | 19.9 | 12.2 | 20.2 | 12.2 | 20.2 | 12.2 |
| M16 | 18 | 18 | 125 | 60 | 375 | 188 | 161 | 24.1 | 14.6 | 29.5 | 14.6 | 33.1 | 14.6 |
| M20 | 25 | 22 | 170 | 120 | 510 | 255 | 214 | 38.2 | 23.0 | 46.7 | 23.0 | 54.0 | 23.0 |
| M24 | 28 | 26 | 210 | 150 | 630 | 315 | 262 | 52.4 | 26.0 | 64.2 | 26.0 | 74.1 | 26.0 |
| M30 | 35 | 33 | 280 | 180 | 840 | 420 | 350 | 80.7 | 71.8 | 98.8 | 71.8 | 114.1 | 71.8 |

All data relevant for Dry and Wet Holes. For Flooded Holes MULTIPLY N_{Rd,seis} x 0.62

* For anchor spacings or edge distances less than the minimum, please refer to the simplified strength limit state design process to verify capacity.

** Tension values are based on service temperature limits -40°C to +40°C only. If service temperature limits is beyond this range please contact Ramset Engineer.

** Note: Seismic Cracked concrete combined pull-out and concrete cone resistance, tension = N⁰_{Rd,seis} = α_{Nseis} N⁰_{Rk,s,seis} / γ_{Msp} where γ_{Msp} = 1.5

| Anchor size, d _b (mm) | Reduced Characteristic Capacity | | | | | | | | | | | |
|----------------------------------|-------------------------------------|------|---|-------------------------------------|------|---|-------------------------------------|------|---|-------------------------------------|------|---|
| | Grade 5.8 Steel Studs | | | Grade 8.8 Steel Studs | | | ANSI 316 Stainless Steel Studs | | | HCR 1.4529 Stainless Steel Studs | | |
| | Shear, V _{Rd,s,seis} (kN)# | | Tension, N _{Rd,s,seis} (kN)*** | Shear, V _{Rd,s,seis} (kN)# | | Tension, N _{Rd,s,seis} (kN)*** | Shear, V _{Rd,s,seis} (kN)# | | Tension, N _{Rd,s,seis} (kN)*** | Shear, V _{Rd,s,seis} (kN)# | | Tension, N _{Rd,s,seis} (kN)*** |
| | C1 | C2 | C1 & C2 |
| M10 | 3.5 | 3.9 | 19.3 | 5.5 | 6.3 | 30.9 | 3.9 | 4.4 | 21.7 | 4.8 | 5.5 | 271 |
| M12 | 6.0 | 6.1 | 28.1 | 9.6 | 9.8 | 44.9 | 6.8 | 6.8 | 31.6 | 8.4 | 8.5 | 39.3 |
| M16 | 10.9 | 10.7 | 52.3 | 17.5 | 171 | 83.7 | 12.3 | 12.0 | 58.8 | 15.3 | 15.0 | 73.3 |
| M20 | 171 | 16.7 | 81.7 | 27.3 | 26.7 | 130.7 | 19.2 | 18.7 | 91.7 | 23.9 | 23.4 | 114.3 |
| M24 | 18.9 | 17.8 | 117.7 | 30.3 | 28.5 | 188.3 | 21.2 | 20.0 | 132.1 | 26.5 | 25.0 | 164.7 |
| M30 | 30.1 | 30.1 | 187.0 | 48.1 | 45.8 | 299.2 | 33.7 | 32.1 | 210.0 | 42.1 | 40.1 | 261.8 |

***Note: Seismic Cracked Concrete steel resistance, tension = N⁰_{Rd,s,seis} = α_{Nseis} N⁰_{Rk,s,seis} / γ_{Ms} (kN) where γ_{Ms} = 1.5 (Grade 5.8 & 8.8 steel), γ_{Ms} = 1.87 (A4 316 SS) and γ_{Ms} = 1.5 (HCR 1.4529 stainless steel)

Note: Shear Data includes annular gap reduction factor of 0.5

For optimised performance data, including performance based on diamond drilling technique, please use Ramset iExpert Anchoring Software.

DESCRIPTION AND PART NUMBERS

| Description | Cartridge Size | Part No. |
|---------------------------|----------------|----------|
| ChemSet™ EPCON™ G5 Xtrem™ | 600ml | CEG5X600 |

ENGINEERING PROPERTIES ChemSet™ Anchor Studs and Threaded Rod

| Anchor Size, d _b | Grade 8.8 Threaded Rod | | | | Stainless Steel High Corrosion Resistance HCR Grade 1.4529/1.4565 Threaded Rod | | | | Section modulus Z (mm ³) |
|-----------------------------|-------------------------------------|----------------------------------|-----------------------------------|------------------------|--|----------------------------------|-----------------------------------|------------------------|--------------------------------------|
| | Shank diameter, d _s (mm) | Stressed Area (mm ²) | Yield Strength f _y MPa | UTS f _u MPa | Shank diameter, d _s (mm) | Stressed Area (mm ²) | Yield Strength f _y MPa | UTS f _u MPa | |
| M10 | 8.6 | 58 | 640 | 800 | 8.2 | 52.8 | 450 | 650 | 62.3 |
| M12 | 10.4 | 84.3 | 640 | 800 | 10 | 78.5 | 450 | 650 | 109.2 |
| M16 | 14.1 | 157 | 640 | 800 | 14 | 153.9 | 450 | 650 | 277.5 |
| M20 | 17.7 | 245 | 640 | 800 | 17.2 | 232.4 | 450 | 650 | 540.9 |
| M24 | 21.2 | 353 | 640 | 800 | 20.7 | 336.5 | 450 | 650 | 935.5 |
| M30 | 26.7 | 561 | 640 | 800 | - | - | - | - | - |

Refer to "Engineering Properties" for ChemSet™ Anchor Studs Grade 5.8 and AISI 316 Stainless Steel in the SARB ANZ.

Seismic Anchors - ChemSet™ EPCON™ G5 Xtrem™ - Anchor Studs

ChemSet™ EPCON™ G5 Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN NEW ZEALAND ONLY

Seismic Anchors - ChemSet™ EPCON™ G5 Xtrem™ - Anchor Studs

STEP 1

Select anchor to be evaluated

Table 1a Indicative combined loading - interaction diagram

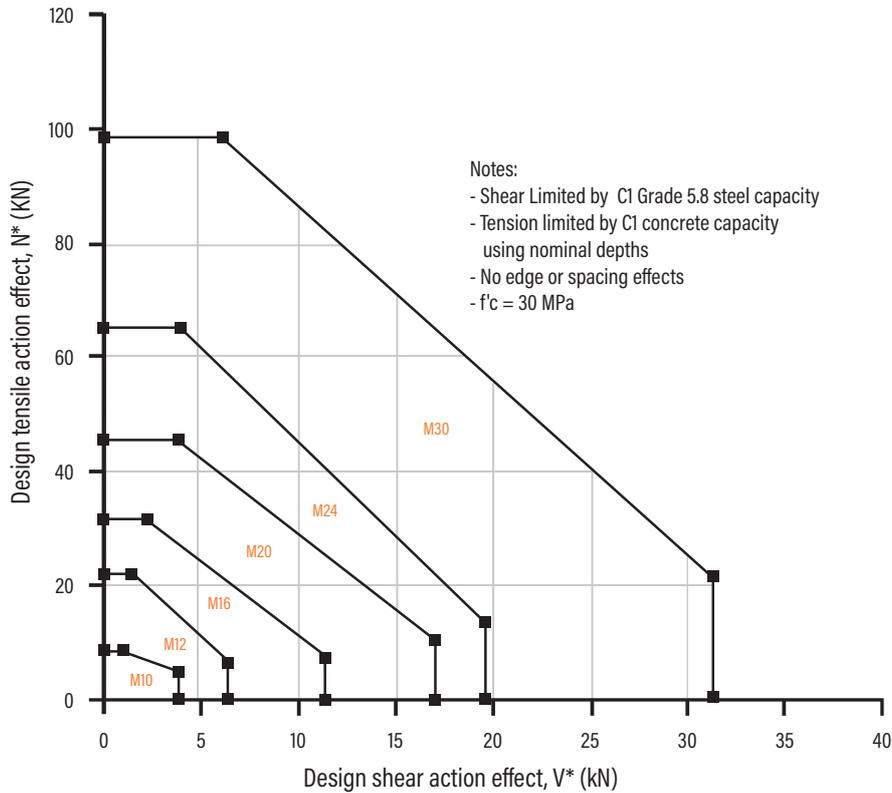


Table 1b Absolute minimum edge distance and anchor spacing values, e_m and a_m (mm)

| Anchor size, d _b | M10 | M12 | M16 | M20 | M24 | M30 |
|--------------------------------------|-----|-----|-----|-----|-----|-----|
| Min. Anchor Spacing - a _m | 40 | 50 | 70 | 85 | 90 | 140 |
| Min. Edge Distance - e _m | 40 | 40 | 45 | 55 | 60 | 90 |

Step 1c Calculate anchor effective depth, h (mm)

Refer to "Description and Part Numbers" table for ChemSet™ Anchor Studs page in the SARB ANZ.

Effective depth, h (mm)

Preferred $h = h_n$ otherwise,

$$h = L_e - t$$

t = total thickness of material(s) being fastened.

| Substrate thickness b _m (mm) | | |
|---|-----|---------------------------|
| Anchor Stud Size (mm) | | |
| M10 | M12 | M16 to M30 |
| h + 30mm ≥ 100mm | | h + (2 x d _n) |

Checkpoint 1

Anchor size determined, absolute minima compliance achieved, effective depth (h) calculated.

ChemSet™ EPCON™ G5 Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN NEW ZEALAND ONLY

STEP

2

Verify Seismic C1 & C2 cracked concrete tensile capacity - per anchor

Table 2a - Seismic C1 & C2 Cracked concrete combined Pull-out and concrete cone resistance, tension

$$N_{Rd,p,seis}^0 = \alpha_{seis} N_{Rk,p,seis}^0 / \gamma_{Msp} \text{ (kN)}, \alpha_{N,seis} = 0.85, \gamma_{Msp} = 1.5, f'c = 30 \text{ MPa where } N_{Rk,p,seis}^0 = \pi * d_b * h * \tau_{Rk,cr,seis}$$

| Anchor Size, d_b | C1 & C2 Seismic Data combined pull-out and concrete cone resistance $N_{Rd,p,seis}^0$ | | | | | | | | | | | | Concrete Cone Resistance - $N_{Rd,c,seis}^0$ |
|------------------------------|---|------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|--------------|-------------|--|
| | M10 | | M12 | | M16 | | M20 | | M24 | | M30 | | |
| | 12 | | 14 | | 18 | | 25 | | 28 | | 35 | | |
| Drilled Hole Dia, d_h (mm) | | | | | | | | | | | | | |
| Effective Depth, h (mm) | C1 | C2 | C1 | C2 | C1 | C2 | C1 | C2 | C1 | C2 | C1 | C2 | |
| 70 | 7.7 | 5.0 | | | | | | | | | | | 12.4 |
| 80 | 8.8 | 5.7 | | | | | | | | | | | 15.1 |
| 90 | 9.9 | 6.4 | 16.5 | 10.0 | | | | | | | | | 18.0 |
| 100 | 11.0 | 7.1 | 18.4 | 11.1 | | | | | | | | | 21.1 |
| 110 | 12.1 | 7.8 | 20.2 | 12.2 | 29.1 | 12.8 | | | | | | | 24.3 |
| 120 | 13.2 | 8.5 | 22.0 | 13.3 | 31.8 | 14.0 | | | | | | | 27.7 |
| 125 | 13.8 | 8.9 | 23.0 | 13.9 | 33.1 | 14.6 | | | | | | | 29.5 |
| 140 | 15.5 | 10.0 | 25.7 | 15.6 | 37.1 | 16.3 | | | | | | | 34.9 |
| 150 | 16.6 | 10.7 | 27.6 | 16.7 | 39.7 | 17.5 | 49.1 | 20.3 | | | | | 38.7 |
| 160 | 17.7 | 11.4 | 29.4 | 17.8 | 42.4 | 18.7 | 52.4 | 21.6 | 64.9 | 19.8 | | | 42.7 |
| 170 | 18.8 | 12.1 | 31.2 | 18.9 | 45.0 | 19.9 | 55.7 | 23.0 | 69.0 | 21.1 | | | 46.7 |
| 180 | 19.9 | 12.8 | 33.1 | 20.0 | 47.7 | 21.0 | 59.0 | 24.4 | 73.1 | 22.3 | | | 50.9 |
| 190 | 21.0 | 13.5 | 34.9 | 21.1 | 50.3 | 22.2 | 62.2 | 25.7 | 77.1 | 23.5 | | | 55.2 |
| 200 | 22.1 | 14.2 | 36.7 | 22.2 | 53.0 | 23.4 | 65.5 | 27.1 | 81.2 | 24.8 | | | 59.6 |
| 210 | | | 38.6 | 23.3 | 55.6 | 24.5 | 68.8 | 28.4 | 85.2 | 26.0 | 93.1 | 53.8 | 64.2 |
| 240 | | | 44.1 | 26.7 | 63.6 | 28.0 | 78.6 | 32.5 | 97.4 | 29.7 | 106.4 | 61.5 | 78.4 |
| 280 | | | | | 74.2 | 32.7 | 91.7 | 37.9 | 113.7 | 34.7 | 124.1 | 71.8 | 98.8 |
| 320 | | | | | 84.8 | 37.4 | 104.8 | 43.3 | 129.9 | 39.6 | 141.8 | 82.0 | 120.7 |
| 350 | | | | | | | 114.6 | 47.4 | 142.1 | 43.4 | 155.1 | 89.7 | 138.1 |
| 400 | | | | | | | 131.0 | 54.1 | 162.4 | 49.6 | 177.3 | 102.5 | 168.7 |
| 450 | | | | | | | | | 182.7 | 55.8 | 199.5 | 115.4 | 201.3 |
| 480 | | | | | | | | | 194.8 | 59.5 | 212.8 | 123.0 | 221.8 |
| 550 | | | | | | | | | | | 243.8 | 141.0 | 272.0 |
| 600 | | | | | | | | | | | 266.0 | 153.8 | 309.9 |

Bold values are at ChemSet Anchors Stud nominal depths h_n

All data relevant for Dry and Wet Holes. For Flooded Holes MULTIPLY $N_{Rd,p,seis}^0$ x 0.62 & $N_{Rd,c,seis}^0$ x 0.62. For single anchor values: Multiply $N_{Rd,p,seis}^0$ *1.17 & $N_{Rd,c,seis}^0$ *1.13. For optimised performance data, including performance based on diamond drilling technique, please use Ramset iExpert Anchoring Software.

| |
|--|
| For C1 Seismic - Calculate $N_{Rd,p,seis}^0$, $N_{Rd,c,seis}^0$ then choose minimum - Refer to Checkpoint 2a and 2b |
| For C2 Seismic - Calculate $N_{Rd,p,seis}^0$ only then choose minimum - Refer to Checkpoint 2a only |

Table 2b-1 Seismic Cracked concrete service temperature limits effect, tension, X_{ns}

| Service temperature (°C) | Seis. Cat. | M10 | M12 | M16 | M20 | M24 | M30 |
|--------------------------|------------|------|------|------|------|------|------|
| -40 °C to +40 °C | C1 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| | C2 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| -40 °C to +60 °C | C1 | 0.85 | 0.85 | 0.84 | 0.85 | 0.84 | 0.85 |
| | C2 | 0.85 | 0.85 | 0.85 | 0.84 | 0.85 | 0.83 |
| -40 °C to +75 °C | C1 | 0.26 | 0.27 | 0.26 | 0.26 | 0.26 | 0.26 |
| | C2 | 0.25 | 0.27 | 0.27 | 0.26 | 0.26 | 0.25 |

Table 2b-2 Seismic Cracked concrete compressive strength effect, tension, X_{nc}

| f'c (MPa) | 20 | 25 | 30 | 40 | 50 |
|--|------|------|-----|------|------|
| X_{nc} for $N_{Rd,p,seis}^0$ (Bond) | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 |
| X_{nc} for $N_{Rd,c,seis}^0$ (Conc.) | 0.81 | 0.91 | 1.0 | 1.15 | 1.29 |


Seismic Anchors - ChemSet™ EPCON™ G5 Xtrem™ - Anchor Studs

ChemSet™ EPCON™ G5 Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN NEW ZEALAND ONLY

Seismic Anchors - ChemSet™ EPCON™ G5 Xtrem™ - Anchor Studs

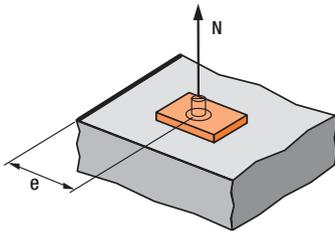

$$X_{ne} = 0.25 + 0.5*(e/h)$$


Where $e_m \leq e \leq e_c$

$$e_c = 1.5*h$$

Note: Tabled values are based on the nominal effective depth, h shown in the installation details. For other values of X_{ne} , please use equation shown above.

Table 2c - Seismic cracked concrete Edge distance effect, tension, X_{ne}

| Anchor size, db | M10 | M12 | M16 | M20 | M24 | M30 |
|-----------------------|------|------|------|------|------|------|
| Edge distance, e (mm) | | | | | | |
| 40 | 0.47 | 0.43 | | | | |
| 45 | 0.50 | 0.45 | 0.43 | | | |
| 50 | 0.53 | 0.48 | 0.45 | | | |
| 55 | 0.56 | 0.50 | 0.47 | 0.41 | | |
| 60 | 0.58 | 0.52 | 0.49 | 0.43 | 0.39 | |
| 65 | 0.61 | 0.55 | 0.51 | 0.44 | 0.40 | |
| 70 | 0.64 | 0.57 | 0.53 | 0.46 | 0.42 | |
| 90 | 0.75 | 0.66 | 0.61 | 0.51 | 0.46 | 0.41 |
| 100 | 0.81 | 0.70 | 0.65 | 0.54 | 0.49 | 0.43 |
| 115 | 0.89 | 0.77 | 0.71 | 0.59 | 0.52 | 0.46 |
| 135 | 1.00 | 0.86 | 0.79 | 0.65 | 0.57 | 0.49 |
| 165 | | 1.00 | 0.91 | 0.74 | 0.64 | 0.54 |
| 187 | | | 1.00 | 0.80 | 0.70 | 0.58 |
| 255 | | | | 1.00 | 0.86 | 0.71 |
| 315 | | | | | 1.00 | 0.81 |
| 420 | | | | | | 1.00 |

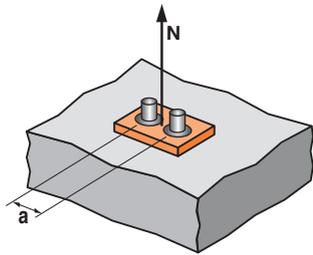

$$X_{na} = 0.5 + a/(6*h)$$

Where $a_m \leq a \leq a_c$

$$a_c = 3*h$$

Note: Tabled values are based on the nominal effective depth, h shown in the installation details. For other values X_{na} , please use equation shown above.

Table 2d - Seismic cracked concrete anchor spacing effect, tension, X_{na}

| Anchor size, d _b | M10 | M12 | M16 | M20 | M24 | M30 |
|-----------------------------|------|------|------|------|------|------|
| Anchor spacing, a (mm) | | | | | | |
| 40 | 0.57 | | | | | |
| 45 | 0.58 | | | | | |
| 50 | 0.59 | 0.58 | | | | |
| 55 | 0.60 | 0.58 | | | | |
| 60 | 0.61 | 0.59 | | | | |
| 70 | 0.63 | 0.61 | 0.59 | | | |
| 80 | 0.66 | 0.63 | 0.61 | 0.58 | | |
| 90 | 0.67 | 0.64 | 0.62 | 0.59 | 0.57 | |
| 140 | 0.76 | 0.71 | 0.69 | 0.64 | 0.61 | 0.58 |
| 170 | 0.81 | 0.76 | 0.73 | 0.67 | 0.63 | 0.60 |
| 200 | 0.87 | 0.80 | 0.77 | 0.70 | 0.66 | 0.62 |
| 270 | 1.00 | 0.91 | 0.86 | 0.76 | 0.71 | 0.66 |
| 330 | | 1.00 | 0.94 | 0.82 | 0.76 | 0.70 |
| 375 | | | 1.00 | 0.87 | 0.80 | 0.72 |
| 510 | | | | 1.00 | 0.90 | 0.80 |
| 630 | | | | | 1.00 | 0.88 |
| 840 | | | | | | 1.00 |

Checkpoint **2a**

Design seismic cracked concrete combined pull-out and concrete cone resistance, $N_{Rd,p,seis}$

$$N_{Rd,p,seis} = N_{Rd,p,seis}^0 * X_{ns} * X_{nc} * X_{ne} * X_{na}$$

Checkpoint **2b**

Design seismic cracked concrete combined pull-out and concrete cone resistance, $N_{Rd,c,seis}$

$$N_{Rd,c,seis} = N_{Rd,c,seis}^0 * X_{ns} * X_{nc} * X_{ne} * X_{na}$$

STEP **3**

Verify seismic C1 & C2 cracked concrete tensile resistance - per anchor

Table 3a - Seismic (C1 & C2) Cracked Concrete steel resistance, tensile, $N_{Rd,s,seis} = \alpha_{seis} N_{Rk,s,seis} / \gamma_{Ms}$ (kN), $\alpha_{seis} = 1.0$

$\gamma_{Ms} = 1.5$ for Grade 5.8 and Grade 8.8 Carbon Steel

$\gamma_{Ms} = 1.87$ for A4 316 Stainless Steel

$\gamma_{Ms} = 1.5$ for HCR 1.4529 Stainless Steel

| Anchor size, d _b | M10 | M12 | M16 | M20 | M24 | M30 |
|-----------------------------|------|------|------|-------|-------|-------|
| Grade 5.8 Carbon Steel | 19.3 | 28.1 | 52.3 | 81.7 | 117.7 | 187.0 |
| Grade 8.8 Carbon Steel | 30.9 | 44.9 | 83.7 | 130.7 | 188.3 | 299.2 |
| A4 316 Stainless Steel | 21.7 | 31.6 | 58.8 | 91.7 | 132.1 | 210.0 |
| HCR 1.4529 Stainless Steel | 27.1 | 39.3 | 73.3 | 114.3 | 164.7 | 261.8 |

Checkpoint **3**

Design seismic C1 & C2 cracked concrete tensile resistance, $N_{Rd,seis}$

$$N_{Rd,seis} = \text{minimum of } N_{Rd,p,seis}, N_{Rd,c,seis}, N_{Rd,s,seis}$$

Check $N^*/N_{Rd,seis} \leq 1$,
if not satisfied return to step 1

ChemSet™ EPCON™ G5 Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN NEW ZEALAND ONLY

STEP 4

Step 4 - Verify seismic C1 & C2 cracked concrete edge shear resistance - per anchor

Table 4a - Seismic C1 & C2 cracked concrete edge resistance, $V_{Rd,c,seis}^0 = \alpha_{seis} V_{Rk,c,seis}^0 / \gamma_{Mc}$ (kN), $\gamma_{Mc} = 1.5$, $\alpha_{seis} = 0.85$, $f'_c = 30$ MPa

| Anchor size, d_b | M10 | M12 | M16 | M20 | M24 | M30 |
|-------------------------|-----|-----|-----|-----|-----|-----|
| Effective depth, h (mm) | 90 | 110 | 125 | 170 | 210 | 280 |
| Edge distance, e_m | | | | | | |
| 40 | 1.3 | 1.5 | | | | |
| 45 | | | 1.9 | | | |
| 55 | | | | 2.8 | | |
| 60 | | | | | 3.5 | |
| 90 | | | | | | 6.5 |

Note: Data includes annular gap reduction factor of 0.5. If annular gap is filled multiply $V_{Rd,c,seis}^0$ *2
For single anchor values: Multiply $V_{Rd,c,seis}^0$ * 1.17


For optimised performance data, please use Ramset iExpert Anchoring Software.

Table 4b - Seismic cracked concrete compressive strength effect, shear, X_{vc}

| f'_c (MPa) | 20 | 25 | 30 | 40 | 50 |
|--------------|------|------|------|------|------|
| X_{vc} | 0.82 | 0.91 | 1.00 | 1.15 | 1.29 |

Table 4c - Seismic cracked concrete load direction effect, concrete edge shear, X_{vd}

| Angle, α° | 0-55 | 60 | 70 | 80 | 90-180 |
|-----------------------|------|-----|-----|-----|--------|
| X_{vd} | 1 | 1.1 | 1.2 | 1.5 | 2 |



Load direction effect, conc. edge shear, X_{vd}


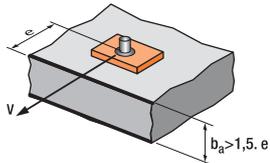


Table 4d - Seismic cracked concrete anchor spacing and edge distance effect, concrete edge shear, X_{ve}

For single anchor fastening X_{ve}

| e/e_m | 1.0 | 1.2 | 1.4 | 1.6 | 1.8 | 2.0 | 2.2 | 2.4 | 2.6 | 2.8 | 3.0 | 3.2 |
|----------|------|------|------|------|------|------|------|------|------|------|------|------|
| X_{ve} | 1.00 | 1.31 | 1.66 | 2.02 | 2.41 | 2.83 | 3.26 | 3.72 | 4.19 | 4.69 | 5.20 | 5.72 |


$$X_{ve} = e/e_m * \sqrt{e/e_m}$$

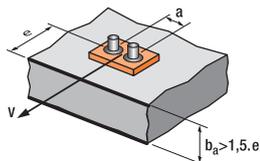

For 2 anchors fastening X_{ve}

| e/e_m | 1.0 | 1.2 | 1.4 | 1.6 | 1.8 | 2.0 | 2.2 | 2.4 | 2.6 | 2.8 | 3.0 | 3.2 |
|---------|------|------|------|------|------|------|------|------|------|------|------|------|
| a/e_m | | | | | | | | | | | | |
| 1.0 | 0.67 | 0.84 | 1.03 | 1.22 | 1.43 | 1.65 | 1.88 | 2.12 | 2.36 | 2.62 | 2.89 | 3.16 |
| 1.5 | 0.75 | 0.93 | 1.12 | 1.33 | 1.54 | 1.77 | 2.00 | 2.25 | 2.50 | 2.76 | 3.03 | 3.31 |
| 2.0 | 0.83 | 1.02 | 1.22 | 1.43 | 1.65 | 1.89 | 2.12 | 2.38 | 2.63 | 2.90 | 3.18 | 3.46 |
| 2.5 | 0.92 | 1.11 | 1.32 | 1.54 | 1.77 | 2.00 | 2.25 | 2.50 | 2.77 | 3.04 | 3.32 | 3.61 |
| 3.0 | 1.00 | 1.20 | 1.42 | 1.64 | 1.88 | 2.12 | 2.37 | 2.63 | 2.90 | 3.18 | 3.46 | 3.76 |
| 3.5 | | 1.30 | 1.52 | 1.75 | 1.99 | 2.24 | 2.50 | 2.76 | 3.04 | 3.32 | 3.61 | 3.91 |
| 4.0 | | | 1.62 | 1.86 | 2.10 | 2.36 | 2.62 | 2.89 | 3.17 | 3.46 | 3.75 | 4.05 |
| 4.5 | | | | 1.96 | 2.21 | 2.47 | 2.74 | 3.02 | 3.31 | 3.60 | 3.90 | 4.20 |
| 5.0 | | | | | 2.33 | 2.59 | 2.87 | 3.15 | 3.44 | 3.74 | 4.04 | 4.35 |
| 5.5 | | | | | | 2.71 | 2.99 | 3.28 | 3.71 | 4.02 | 4.33 | 4.65 |
| 6.0 | | | | | | | 2.83 | 3.11 | 3.41 | 3.71 | 4.02 | 4.33 |

$$X_{ve} = \frac{3 * e + a}{6 * e_m} * \sqrt{e/e_m}$$

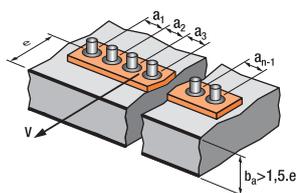

For 3 anchors fastening and more

$$X_{ve} = \frac{3 * e + a_1 + a_2 + a_3 + \dots + a_{n-1}}{3 * n * e_m} * \sqrt{e/e_m}$$

ChemSet™ EPCON™ G5 Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN NEW ZEALAND ONLY


Table 4e - Seismic C1 & C2 Cracked concrete Pryout failure, $V_{Rd,cp,seis}^0 = \alpha_{seis} V_{Rk,cp} / \gamma_{Mpr}$ (kN), $\gamma_{Mpr} = 1.5$, $\alpha_{seis} = 0.75$, $f'_c = 30$ MPa

| Anchor size, d_n | | M10 | M12 | M16 | M20 | M24 | M30 |
|-------------------------|-----------------|-----|------|------|------|------|------|
| Effective depth, h (mm) | | 90 | 110 | 125 | 170 | 210 | 280 |
| -40 °C to +40 °C | C1 Seismic Data | 8.8 | 178 | 29.2 | 46.7 | 64.2 | 98.8 |
| | C2 Seismic Data | 5.7 | 10.8 | 12.9 | 20.3 | 23.0 | 63.3 |
| -40 °C to +60 °C | C1 Seismic Data | 7.5 | 15.1 | 24.5 | 39.6 | 54.0 | 83.9 |
| | C2 Seismic Data | 4.8 | 9.1 | 11.0 | 17.1 | 19.6 | 52.8 |
| -40 °C to +75 °C | C1 Seismic Data | 2.3 | 4.8 | 7.5 | 12.2 | 16.6 | 25.7 |
| | C2 Seismic Data | 1.4 | 2.9 | 3.5 | 5.3 | 6.0 | 15.8 |

Note: Data includes annular gap reduction factor of 0.5 For single anchor values: Multiply $V_{Rd,cp,seis}^0$ *1.13
If annular gap is filled multiply $V_{Rd,cp,seis}$ *2

Table 4f Anchor at a corner effect, concrete edge shear, X_{VS}

Note: For $e_1/e_2 > 1.25$, $X_{VS} = 1.0$



| Edge distance, e_2 (mm) | 25 | 30 | 35 | 50 | 60 | 75 | 125 | 200 | 300 | 400 | 600 | 900 |
|---------------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| Edge distance, e_1 (mm) | | | | | | | | | | | | |
| 25 | 0.86 | 0.77 | 0.70 | 0.58 | 0.53 | 0.49 | 0.41 | 0.37 | 0.35 | 0.34 | 0.32 | 0.32 |
| 30 | 0.97 | 0.86 | 0.78 | 0.64 | 0.58 | 0.52 | 0.43 | 0.38 | 0.36 | 0.34 | 0.33 | 0.32 |
| 35 | 1.00 | 0.95 | 0.86 | 0.69 | 0.63 | 0.56 | 0.46 | 0.40 | 0.37 | 0.35 | 0.33 | 0.32 |
| 50 | 1.00 | 1.00 | 1.00 | 0.86 | 0.77 | 0.67 | 0.52 | 0.44 | 0.39 | 0.37 | 0.35 | 0.33 |
| 60 | 1.00 | 1.00 | 1.00 | 0.97 | 0.86 | 0.75 | 0.57 | 0.47 | 0.41 | 0.38 | 0.36 | 0.34 |
| 75 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.64 | 0.51 | 0.44 | 0.41 | 0.37 | 0.35 |
| 125 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.65 | 0.53 | 0.48 | 0.42 | 0.38 |
| 200 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.67 | 0.58 | 0.49 | 0.42 |
| 300 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.72 | 0.58 | 0.49 |
| 400 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.67 | 0.55 |
| 500 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.77 | 0.61 |
| 600 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.67 |
| 900 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 |

Seismic Anchors - ChemSet™ EPCON™ G5 Xtrem™ - Anchor Studs

Checkpoint 4a

Design seismic cracked concrete edge shear resistance, $V_{Rd,c,seis} = V_{Rd,c,seis}^0 * X_{vc} * X_{vd} * X_{ve} * X_{vs}$

Checkpoint 4b

Design seismic cracked concrete Pryout failure, $V_{Rd,cp,seis} = V_{Rd,cp,seis}^0 * X_{nc} * X_{ne} * X_{na}$

STEP 5

Verify seismic C1 & C2 cracked concrete shear resistance - per anchor

Table 5a - Seismic C1 & C2 Cracked Concrete steel shear resistance, $V_{Rd,s,seis} = \alpha_{seis} V_{Rk,s,seis} / \gamma_{Ms}$ (kN), $\alpha_{seis} = 0.85$

$\gamma_{Ms} = 1.25$ for Grade 5.8 and Grade 8.8 Carbon Steel

$\gamma_{Ms} = 1.56$ for A4 316 Stainless Steel

| Anchor size, db | M10 | | M12 | | M16 | | M20 | | M24 | | M30 | |
|----------------------------|-----|-----|-----|-----|------|------|------|------|------|------|------|------|
| | C1 | C2 | C1 | C2 | C1 | C2 | C1 | C2 | C1 | C2 | C1 | C2 |
| Grade 5.8 Carbon Steel | 3.5 | 3.9 | 6.0 | 6.1 | 10.9 | 10.7 | 17.1 | 16.7 | 18.9 | 17.8 | 30.1 | 30.1 |
| Grade 8.8 Carbon Steel | 5.5 | 6.3 | 9.6 | 9.8 | 17.5 | 17.1 | 27.3 | 26.7 | 30.3 | 28.5 | 48.1 | 45.8 |
| A4 316 Stainless Steel | 3.9 | 4.4 | 6.8 | 6.8 | 12.3 | 12.0 | 19.2 | 18.7 | 21.2 | 20.0 | 33.7 | 32.1 |
| HCR 1.4529 Stainless Steel | 4.8 | 5.5 | 8.4 | 8.5 | 15.3 | 15.0 | 23.9 | 23.4 | 26.5 | 25.0 | 42.1 | 40.1 |

Note: Data includes annular gap reduction factor of 0.5 If annular gap is filled multiply $V_{Rd,s,seis}$ *2
For single anchor values: Multiply $V_{Rd,s,seis}$ *1.17

Checkpoint 5

Design seismic C1 & C2 cracked concrete shear resistance, $V_{Rd,seis}$
 $V_{Rd,seis} = \text{minimum of } V_{Rd,c,seis}, V_{Rd,cp,seis}, V_{Rd,s,seis}$
 Check $V/V_{Rd,seis} \leq 1$,
 if not satisfied return to step 1

ChemSet™ EPCON™ G5 Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN NEW ZEALAND ONLY

STEP 6 Combined Loading

Checkpoint 6

Check

$$N^*/N_{Rd,seis} + V^*/V_{Rd,seis} \leq 1.0,$$

if not satisfied return to step 1

Specify - Threaded Stud Anchors
 Ramset™ EPCON™ G5 Xtrem™ with (Anchor Size) grade 5.8 ChemSet™ Anchor Stud (Anchor Stud Part Number) Drilled Hole Depth to be (h) mm.

Example
 Ramset™ EPCON™ G5 Xtrem™ Injection with M16 grade 5.8 ChemSet™ Anchor Stud (CS16190GH). Drilled hole depth to be 125mm. To be installed according to Ramset™ Installation Instructions.

Use Ramset™ iExpert Anchor Software for optimised calculation or where a greater range of anchor layout detail is needed.

ChemSet™ EPCON™ G5 Xtrem™

CHEMICAL INJECTION - NON-CRACKED & CRACKED CONCRETE

AVAILABLE IN NEW ZEALAND ONLY

(Australia refer to ChemSet™ Reo502™ Xtrem™ range)

GENERAL INFORMATION

Chemical Anchoring - Anchor Studs

| Performance Related | Material Specification | Installation Related |
|---------------------|------------------------|----------------------|
| | | |

Product

Chemset™ EPCON™ G5 Xtrem™ is a heavy duty pure Epoxy for anchoring threaded studs and reinforcing bar into cracked and uncracked concrete.

Compliance

European Technical Assessment (option 1) - ETA-25/0648

Design according to:

- EN 1992-4 (formerly ETAG001 Annex C, E & TR045)
- Use enclosed data for simplified calculation method

Use Ramset™ iExpert Anchor Software for optimised calculation or where a greater range of anchor layout detail is needed.

Benefits, Advantages and Features

- 100 year working Life

Greater productivity:

- Anchors in dry, damp, wet or flooded holes
- Easy dispensing even in cold weather

Greater security:

- Strong bond
- Rated for sustained loading


Versatile:

- Anchors in carbide drilled and diamond drilled holes
- Cold and temperate climates

Greater safety:

- Low odour
- VOC Compliant
- Suitable for contact with drinking water

Installation

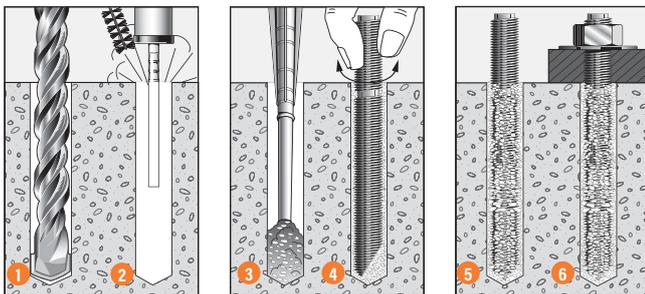

- Drill recommended diameter and depth hole.
- Important:** For hammer drilling technique clean dust and debris from hole with stiff wire brush and blower in the following sequence: blow x 2, brush x 2, blow x 2, brush x 2, blow x 2. For diamond drilling technique refer to **ETA-25/0648**.
- Screw mixing nozzle onto cartridge and dispense adhesive to waste until colour is orange. Insert mixing nozzle to bottom of hole. Fill hole to 2/3 the hole depth slowly, ensuring no air pockets form.
- Insert **Ramset™ ChemSet™ Anchor Stud/rebar** to bottom of hole while turning.
- Allow Chemset™ EPCON™ G5 Xtrem™ to cure as per setting times.
- Attach fixture.



Principal Applications

- Threaded Studs
- Starter Bars
- Threaded Inserts
- Over-head installation
- Steel Columns
- Hand Rails
- Road Stitching

Recommended Installation Temperatures

| | Minimum | Maximum |
|-----------|---------|---------|
| Substrate | 5°C | 40°C |
| Adhesive | 5°C | 40°C |

Service Temperature Limits

| |
|--------------------|
| T1: -40°C to +40°C |
| T2: -40°C to +60°C |
| T3: -40°C to +75°C |

Setting Times

| Temperature of base material | Gel Time | Curing time in dry concrete | Curing time in wet and flooded concrete |
|------------------------------|----------|-----------------------------|---|
| 5°C | 75 min | 30h | 60 h |
| 10°C | 45 min | 22h | 44 h |
| 15°C | 35 min | 14h | 28 h |
| 20°C | 22 min | 7h | 14 h |
| 25°C | 14 min | 5h | 10 h |
| 30°C | 8 min | 4h | 8 h |
| 35°C | 6 min | 3h | 6h |
| 40°C | 4 min | 2h 45min | 5h 30min |

ChemSet™ EPCON™ G5 Xtrem™

CHEMICAL INJECTION - NON-CRACKED & CRACKED CONCRETE

AVAILABLE IN NEW ZEALAND ONLY

Installation and performance details: ChemSet™ EPCON™ G5 Xtrem™ and ChemSet™ Anchor Studs

| Anchor size, d _b (mm) | Installation Details | | | | Optimum dimensions* | | |
|----------------------------------|--|--|--------------------------------|--|------------------------------------|-------------------------------------|---|
| | Drilled hole diameter, d _h (mm) | Fixture hole diameter, d _f (mm) | Anchor effective depth, h (mm) | Tightening torque, T _r (Nm) | Edge distance, e _c (mm) | Anchor spacing, a _c (mm) | Concrete substrate thickness, b _m (mm) |
| M10 | 12 | 12 | 90 | 20 | 135 | 270 | 120 |
| M12 | 14 | 14 | 110 | 30 | 165 | 330 | 140 |
| M16 | 18 | 18 | 125 | 60 | 187.5 | 375 | 160 |
| M20 | 25 | 22 | 150 | 120 | 225 | 450 | 190 |
| | | | 170 | | 255 | 510 | 220 |
| M24 | 28 | 26 | 160 | 150 | 240 | 480 | 200 |
| | | | 210 | | 315 | 630 | 270 |
| M30 | 35 | 33 | 280 | 180 | 420 | 840 | 350 |

* Note: For shear loads acting towards an edge or where these optimum dimensions are not achievable, please use the simplified strength limit state design process to verify capacity.

| Anchor size, d _b (mm) | Reduced Characteristic Capacity# | | | | | | | | |
|----------------------------------|----------------------------------|-----------------------------------|------------------------------|-----------------------------------|--------------------------------|-----------------------------------|--|--------|-------|
| | Grade 5.8 Steel Studs | | Grade 8.8 Steel Studs | | ANSI 316 Stainless Steel Studs | | Non-Cracked Concrete | | |
| | Shear, φV _{us} (kN) | Tension, φN _{us} (kN)*** | Shear, φV _{us} (kN) | Tension, φN _{us} (kN)*** | Shear, φV _{us} (kN) | Tension, φN _{us} (kN)*** | Tension, φN _{uc} (kN)** | | |
| | | | | | | | Concrete Compressive Strength, f' _c | | |
| | | | | | | 20 MPa | 32 MPa | 40 MPa | |
| M10 | 11.8 | 18.9 | 17.5 | 28.2 | 14.2 | 19.8 | 28.0 | 35.4 | 37.0 |
| M12 | 17.5 | 28.1 | 26.0 | 41.9 | 21.1 | 29.5 | 37.8 | 47.9 | 53.6 |
| M16 | 33.1 | 53.9 | 50.9 | 82.1 | 41.4 | 57.7 | 45.8 | 58.0 | 64.9 |
| M20 | 49.9 | 81.3 | 76.8 | 123.9 | 62.4 | 87.1 | 60.2 | 76.2 | 85.4 |
| | | | | | | | 72.6 | 91.9 | 103.0 |
| M24 | 72.3 | 117.8 | 111.3 | 179.5 | 90.4 | 126.2 | 66.3 | 84.0 | 94.0 |
| | | | | | | | 99.7 | 126.2 | 141.4 |
| M30 | - | - | 185.5 | 299.2 | - | - | 153.5 | 194.4 | 217.7 |

**Note: Reduced characteristic ultimate concrete tensile capacity = φN_{uc} and N_{uc} = Characteristic ultimate concrete tensile capacity. For value of φ refer to Table 2a

For conversion to Working Load Limit MULTIPLY φN_{uc} x 0.5

***Note: Reduced characteristic ultimate steel tensile capacity = φN_{us} where φ = 0.67 and N_{us} = Characteristic ultimate steel tensile capacity.

For conversion to Working Load Limit MULTIPLY φN_{us} x 0.67 for Gr 5.8 & Gr 8.8

#Note: Design Tensile Capacity φN_{ur} = minimum of φN_{uc} and φN_{us}

For Cracked Concrete performance, please use the simplified strength limit state design process to verify capacity.

Data is based on a Service temperature limit of -40°C to +40°C

All data relevant for Dry and Wet Holes. For Flooded Holes MULTIPLY φN_{uc} x 0.63

For optimised performance data, including performance based on diamond drilling technique, please use Ramset iExpert Anchoring Software.

DESCRIPTION AND PART NUMBERS

| Description | Cartridge Size | Part No. |
|---------------------------|----------------|----------|
| ChemSet™ EPCON™ G5 Xtrem™ | 600ml | CEG5X600 |

ENGINEERING PROPERTIES

ChemSet™ Anchor Studs and Threaded Rod

| Anchor Size, d _b | Grade 8.8 Threaded Rod | | | | Stainless Steel High Corrosion Resistance HCR Grade 1.4529/1.4565 Threaded Rod | | | | Section modulus Z (mm ³) |
|-----------------------------|-------------------------------------|----------------------------------|-----------------------------------|------------------------|--|----------------------------------|-----------------------------------|------------------------|--------------------------------------|
| | Shank diameter, d _s (mm) | Stressed Area (mm ²) | Yield Strength f _y MPa | UTS f _u MPa | Shank diameter, d _s (mm) | Stressed Area (mm ²) | Yield Strength f _y MPa | UTS f _u MPa | |
| M10 | 8.6 | 58 | 640 | 800 | 8.2 | 52.8 | 450 | 650 | 62.3 |
| M12 | 10.4 | 84.3 | 640 | 800 | 10 | 78.5 | 450 | 650 | 109.2 |
| M16 | 14.1 | 157 | 640 | 800 | 14 | 153.9 | 450 | 650 | 277.5 |
| M20 | 17.7 | 245 | 640 | 800 | 17.2 | 232.4 | 450 | 650 | 540.9 |
| M24 | 21.2 | 353 | 640 | 800 | 20.7 | 336.5 | 450 | 650 | 935.5 |
| M30 | 26.7 | 561 | 640 | 800 | - | - | - | - | - |

Refer to "Engineering Properties" for ChemSet™ Anchor Studs Grade 5.8 and AISI 316 Stainless Steel in the SARB ANZ.

Chemical Anchoring - Anchor Studs

ChemSet™ EPCON™ G5 Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN NEW ZEALAND ONLY

Chemical Anchoring - Anchor Studs

STEP 1 Select anchor to be evaluated

Table 1a Indicative combined loading - interaction diagram

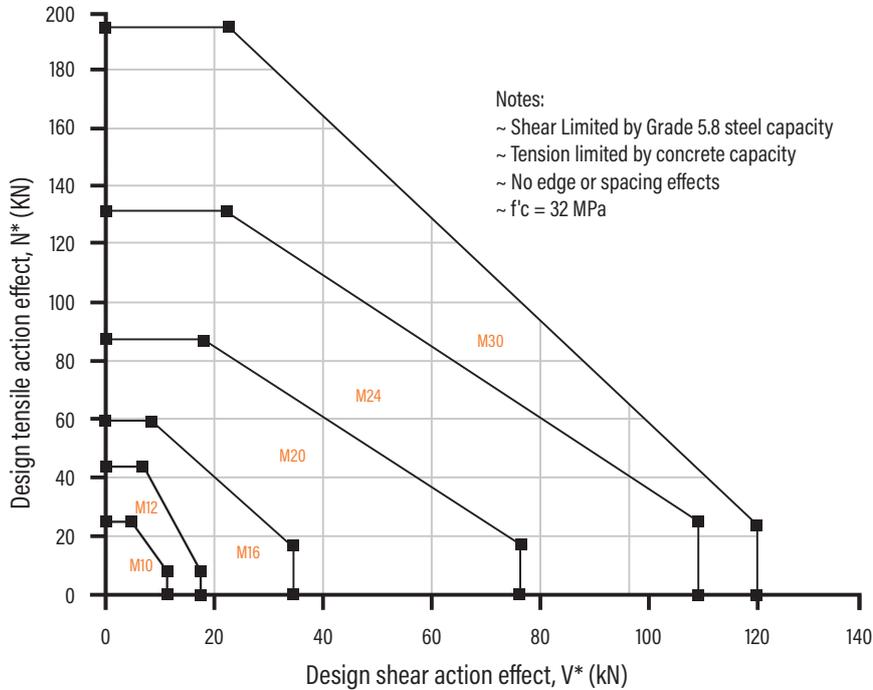


Table 1b Absolute minimum edge distance and anchor spacing values, e_m and a_m (mm)

| Anchor size, d _b | M10 | M12 | M16 | M20 | M24 | M30 |
|--------------------------------------|-----|-----|-----|-----|-----|-----|
| Min. Anchor Spacing - a _m | 40 | 50 | 70 | 85 | 90 | 140 |
| Min. Edge Distance - e _m | 40 | 40 | 45 | 55 | 60 | 90 |

Step 1c Calculate anchor effective depth, h (mm)

Refer to "Description and Part Numbers" table for ChemSet Anchor Studs page in the SARB ANZ on page 141.

Effective depth, h (mm)

Preferred $h = h_n$ otherwise,

$h = L_e - t$

t = total thickness of material(s) being fastened.

| Substrate thickness b _m (mm) | | |
|---|-----|----------------------|
| Anchor Stud Size (mm) | | |
| M10 | M12 | M16 to M30 |
| $h + 30\text{mm} \geq 100\text{mm}$ | | $h + (2 \times d_b)$ |

Checkpoint 1 Anchor size determined, absolute minima compliance achieved, effective depth (h) calculated.

ChemSet™ EPCON™ G5 Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN NEW ZEALAND ONLY

Chemical Anchoring - Anchor Studs

STEP 2 Verify concrete tensile capacity - per anchor

Table 2a Reduced characteristic ultimate concrete tensile capacity, ϕN_{uc} (kN), $\phi_c = 1/1.5 = 0.67$, $f'_c = 32$ MPa

| Anchor Size, d_h | Combined pull-out and concrete cone resistance - ϕN_{ucp} | | | | | | Concrete Cone Resistance - ϕN_{ucc} |
|------------------------------|---|-------------|-------------|--------------|--------------|--------------|---|
| | M10 | M12 | M16 | M20 | M24 | M30 | |
| Drilled Hole Dia, d_h (mm) | 12 | 14 | 18 | 25 | 28 | 35 | |
| Effective Depth, h (mm) | | | | | | | |
| 70 | 27.5 | | | | | | 24.3 |
| 80 | 31.5 | | | | | | 29.7 |
| 90 | 35.5 | 40.5 | | | | | 35.4 |
| 100 | 39.3 | 45.0 | | | | | 41.5 |
| 110 | 43.3 | 49.5 | 64.1 | | | | 47.9 |
| 120 | 47.2 | 54.0 | 69.9 | | | | 54.5 |
| 125 | 49.2 | 56.3 | 72.8 | | | | 58.0 |
| 140 | 55.1 | 63.0 | 81.6 | | | | 68.7 |
| 150 | 59.0 | 67.5 | 87.4 | 102.7 | | | 76.2 |
| 160 | 63.0 | 72.0 | 93.2 | 109.6 | 131.0 | | 84.0 |
| 170 | 66.9 | 76.5 | 99.0 | 116.4 | 139.2 | | 91.9 |
| 180 | 70.8 | 81.0 | 104.9 | 123.3 | 147.4 | | 100.2 |
| 190 | 74.8 | 85.5 | 110.7 | 130.1 | 155.6 | | 108.6 |
| 200 | 78.7 | 90.0 | 116.5 | 137.0 | 163.8 | | 117.3 |
| 210 | | 94.4 | 122.4 | 143.8 | 172.0 | 202.2 | 126.2 |
| 240 | | 108.0 | 139.8 | 164.4 | 196.5 | 231.1 | 154.2 |
| 280 | | | 163.1 | 191.8 | 229.3 | 269.6 | 194.4 |
| 320 | | | 186.4 | 219.2 | 262.1 | 308.2 | 237.5 |
| 350 | | | | 239.7 | 286.6 | 337.1 | 271.6 |
| 400 | | | | 274.0 | 327.6 | 385.2 | 331.9 |
| 450 | | | | | 368.5 | 433.4 | 396.0 |
| 480 | | | | | 393.1 | 462.2 | 436.3 |
| 550 | | | | | | 529.7 | 535.1 |
| 600 | | | | | | 577.8 | 609.7 |

For optimised performance data, including performance based on diamond drilling technique, please use Ramset iExpert Anchoring Software.

Table 2a-2 Cracked Concrete effect, tension, X_{ncr}

| Anchor Size, d_h | Cracked Concrete Effect - X_{ncr} | | | | | | X_{ncr} where $\phi N_{uc} = \phi N_{ucp}$ (from Table 2a) |
|--------------------|-------------------------------------|------|------|------|------|------|--|
| | M10 | M12 | M16 | M20 | M24 | M30 | |
| f'_c (MPa) | | | | | | | |
| 20 to 50 | 0.36 | 0.53 | 0.57 | 0.65 | 0.63 | 0.68 | 0.70 |

Bold values are at Chemset Anchor Stud nominal Depths. For Sustained Loads MULTIPLY ϕN_{uc} x 0.72 (100 years). All data relevant for Dry and Wet Holes. For Flooded Holes MULTIPLY ϕN_{uc} x 0.63 For Non-cracked concrete $X_{ncr} = 1$.

Calculate ϕN_{uc} for both ϕN_{ucp} and ϕN_{ucc} then choose the minimum - Refer to Checkpoint 2

Table 2b-1 Concrete service temperature limits effect, tension, X_{ns}

| Anchor Size, d_h | Service temperature limits effect, tension, X_{ns} | | | | | | X_{ns} where $\phi N_{uc} = \phi N_{ucp}$ (from Table 2a) |
|--------------------------|--|-----|-----|------|-----|-----|---|
| | M10 | M12 | M16 | M20 | M24 | M30 | |
| Service temperature (°C) | | | | | | | |
| T1: -40°C to +40°C | | | | 1.00 | | | 1.00 |
| T2: -40°C to +60°C | | | | 0.84 | | | |
| T3: -40°C to +75°C | | | | 0.26 | | | |

Table 2b-2 Concrete compressive strength effect, tension, X_{nc}

| NON-CRACKED | Non-Cracked Concrete - X_{nc} | | | | | | X_{nc} where $\phi N_{uc} = \phi N_{ucp}$ (from Table 2a) |
|--------------------|---------------------------------|------|------|------|------|------|---|
| | M10 | M12 | M16 | M20 | M24 | M30 | |
| Anchor Size, d_h | | | | | | | |
| f'_c (MPa) | | | | | | | |
| 20 | 0.91 | 0.91 | 0.87 | 0.87 | 0.83 | 0.83 | 0.79 |
| 25 | 0.95 | 0.95 | 0.93 | 0.93 | 0.91 | 0.91 | 0.88 |
| 32 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| 40 | 1.05 | 1.05 | 1.07 | 1.07 | 1.09 | 1.09 | 1.12 |
| 50 | 1.09 | 1.09 | 1.14 | 1.14 | 1.20 | 1.20 | 1.25 |


| CRACKED | Cracked Concrete - X_{nc} | | | | | | X_{nc} where $\phi N_{uc} = \phi N_{ucc}$ (from Table 2a) |
|--------------------|-----------------------------|------|------|------|------|------|---|
| | M10 | M12 | M16 | M20 | M24 | M30 | |
| Anchor Size, d_h | | | | | | | |
| f'_c (MPa) | | | | | | | |
| 20 | 0.95 | 0.95 | 0.95 | 0.91 | 0.91 | 0.87 | 0.79 |
| 25 | 0.98 | 0.98 | 0.98 | 0.95 | 0.95 | 0.93 | 0.88 |
| 32 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| 40 | 1.02 | 1.02 | 1.02 | 1.05 | 1.05 | 1.07 | 1.12 |
| 50 | 1.05 | 1.05 | 1.05 | 1.09 | 1.09 | 1.14 | 1.25 |

ChemSet™ EPCON™ G5 Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN NEW ZEALAND ONLY

Chemical Anchoring - Anchor Studs

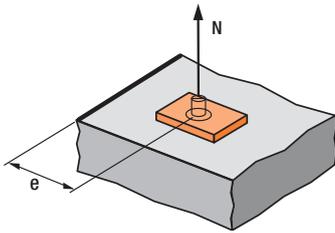

$$X_{ne} = 0.25 + 0.5 \cdot (e/h)$$


Where $e_m \leq e \leq e_c$

$$e_c = 1.5 \cdot h$$

Note: Tabled values are based on the nominal effective depth, h shown in the installation details. For other values of X_{ne} , please use equation shown above.

Table 2c - Concrete Edge distance effect, tension, X_{ne}

| Anchor size, d_b | M10 | M12 | M16 | M20 | M24 | M30 |
|-----------------------|------|------|------|------|------|------|
| Edge distance, e (mm) | | | | | | |
| 40 | 0.47 | 0.43 | | | | |
| 45 | 0.50 | 0.45 | 0.43 | | | |
| 50 | 0.53 | 0.48 | 0.45 | | | |
| 55 | 0.56 | 0.50 | 0.47 | 0.41 | | |
| 60 | 0.58 | 0.52 | 0.49 | 0.43 | 0.39 | |
| 65 | 0.61 | 0.55 | 0.51 | 0.44 | 0.40 | |
| 70 | 0.64 | 0.57 | 0.53 | 0.46 | 0.42 | |
| 90 | 0.75 | 0.66 | 0.61 | 0.51 | 0.46 | 0.41 |
| 100 | 0.81 | 0.70 | 0.65 | 0.54 | 0.49 | 0.43 |
| 115 | 0.89 | 0.77 | 0.71 | 0.59 | 0.52 | 0.46 |
| 135 | 1 | 0.86 | 0.79 | 0.65 | 0.57 | 0.49 |
| 165 | | 1 | 0.91 | 0.74 | 0.64 | 0.54 |
| 187 | | | 1 | 0.80 | 0.70 | 0.58 |
| 255 | | | | 1 | 0.86 | 0.71 |
| 315 | | | | | 1 | 0.81 |
| 420 | | | | | | 1 |

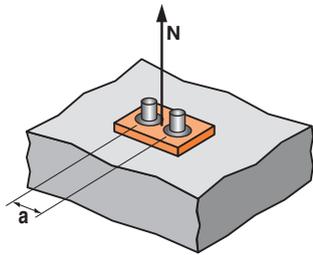

$$X_{na} = 0.5 + a/(6 \cdot h)$$

Where $a_m \leq a \leq a_c$

$$a_c = 3 \cdot h$$

Note: Tabled values are based on the nominal effective depth, h shown in the installation details. For other values X_{na} , please use equation shown above.

Table 2d - Concrete anchor spacing effect, tension, X_{na}

| Anchor size, d_b | M10 | M12 | M16 | M20 | M24 | M30 |
|------------------------|------|------|------|------|------|------|
| Anchor spacing, a (mm) | | | | | | |
| 40 | 0.57 | | | | | |
| 45 | 0.58 | | | | | |
| 50 | 0.59 | 0.58 | | | | |
| 55 | 0.60 | 0.58 | | | | |
| 60 | 0.61 | 0.59 | | | | |
| 70 | 0.63 | 0.61 | 0.59 | | | |
| 85 | 0.66 | 0.63 | 0.61 | 0.58 | | |
| 90 | 0.67 | 0.64 | 0.62 | 0.59 | 0.57 | |
| 140 | 0.76 | 0.71 | 0.69 | 0.64 | 0.61 | 0.58 |
| 170 | 0.81 | 0.76 | 0.73 | 0.67 | 0.63 | 0.60 |
| 200 | 0.87 | 0.80 | 0.77 | 0.70 | 0.66 | 0.62 |
| 270 | 1 | 0.91 | 0.86 | 0.76 | 0.71 | 0.66 |
| 330 | | 1 | 0.94 | 0.82 | 0.76 | 0.70 |
| 375 | | | 1 | 0.87 | 0.80 | 0.72 |
| 510 | | | | 1 | 0.90 | 0.80 |
| 630 | | | | | 1 | 0.88 |
| 840 | | | | | | 1 |

Checkpoint **2**

Design reduced ultimate concrete tensile capacity, ϕN_{urc}

$$\phi N_{urc} = \text{minimum of } \phi N_{ucp} \cdot X_{ncr} \cdot X_{ns} \cdot X_{nc} \cdot X_{ne} \cdot X_{na} \text{ and } \phi N_{ucc} \cdot X_{ncr} \cdot X_{ns} \cdot X_{nc} \cdot X_{ne} \cdot X_{na}$$

STEP **3**

Verify anchor tensile capacity - per anchor

Table 3a Reduced characteristic ultimate steel tensile capacity, ϕN_{us} (kN) where $\phi_n = 0.67$ for Gr 5.8 & Gr 8.8

| Anchor size, d_b | M10 | M12 | M16 | M20 | M24 | M30 |
|---|------|------|------|-------|-------|-------|
| ChemSet™ Anchor Stud Grade 5.8 Carbon Steel | 18.9 | 28.1 | 53.9 | 81.3 | 117.8 | - |
| ChemSet™ Anchor Stud A4/316 Stainless Steel | 19.8 | 29.5 | 57.7 | 87.1 | 126.2 | - |
| ChemSet™ Anchor Stud Grade 8.8 Carbon Steel | 28.2 | 41.9 | 82.1 | 123.9 | 179.5 | 299.2 |

Note $\phi_n = 0.58$ for ChemSet™ Anchor Stud A4/316 Stainless Steel

Checkpoint **3**

Design reduced ultimate tensile capacity, ϕN_{ur}

$$\phi N_{ur} = \text{minimum of } \phi N_{urc}, \phi N_{us}$$

Check $N^*/\phi N_{ur} \leq 1.0$,

if not satisfied return to step 1

ChemSet™ EPCON™ G5 Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN NEW ZEALAND ONLY

Chemical Anchoring - Anchor Studs

STEP 4

Step 4 - Verify concrete shear capacity - per anchor

Table 4a - 1 Reduced characteristic ultimate concrete edge shear capacity, ϕV_{uc} (kN), $\phi = 1/1.5 = 0.67$, $f'_c = 32$ MPa


| Anchor size, d_b | M10 | M12 | M16 | M20 | M24 | M30 |
|---------------------------|----------|----------|-----------|-----------|-----------|-----------|
| Effective depth, h (mm) | 70 - 200 | 90 - 240 | 110 - 320 | 150 - 400 | 160 - 480 | 210 - 600 |
| Edge distance, e_m | | | | | | |
| 40 | 4.3 | 4.7 | | | | |
| 45 | | | 6.2 | | | |
| 55 | | | | 9.1 | | |
| 60 | | | | | 10.8 | |
| 90 | | | | | | 20.0 |

For optimised performance data, please use Ramset iExpert Anchoring Software.

Table 4a-2 Cracked Concrete effect, shear, X_{vcr}

| Anchor size, d_b | M10 | M12 | M16 | M20 | M24 | M30 |
|--------------------|------|-----|-----|-----|-----|-----|
| X_{vcr} | 0.70 | | | | | |

For Non-cracked concrete $X_{vcr} = 1.0$




Load direction effect, conc. edge shear, X_{vd}

Table 4b - Concrete compressive strength effect, shear, X_{vc}

| f'_c (MPa) | 20 | 25 | 32 | 40 | 50 |
|--------------|------|------|----|------|------|
| X_{vc} | 0.79 | 0.86 | 1 | 1.11 | 1.22 |

Table 4c - Concrete load direction effect, concrete edge shear, X_{vd}

| Angle, α° | 0-55 | 60 | 70 | 80 | 90-180 |
|-----------------------|------|-----|-----|-----|--------|
| X_{vd} | 1 | 1.1 | 1.2 | 1.5 | 2 |

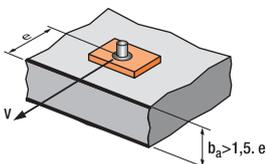


$$X_{ve} = e/e_m * \sqrt{e/e_m}$$

Table 4d - Concrete anchor spacing and edge distance effect, concrete edge shear, X_{ve}

For single anchor fastening X_{ve}


| e/e_m | 1.0 | 1.2 | 1.4 | 1.6 | 1.8 | 2.0 | 2.2 | 2.4 | 2.6 | 2.8 | 3.0 | 3.2 |
|----------|------|------|------|------|------|------|------|------|------|------|------|------|
| X_{ve} | 1.00 | 1.31 | 1.66 | 2.02 | 2.41 | 2.83 | 3.26 | 3.72 | 4.19 | 4.69 | 5.20 | 5.72 |

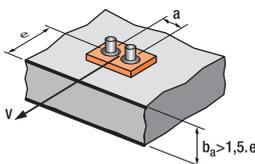

$$X_{ve} = \frac{3 * e + a}{6 * e_m} * \sqrt{e/e_m}$$

For 2 anchors fastening X_{ve}

| e/e_m | 1.0 | 1.2 | 1.4 | 1.6 | 1.8 | 2.0 | 2.2 | 2.4 | 2.6 | 2.8 | 3.0 | 3.2 |
|---------|------|------|------|------|------|------|------|------|------|------|------|------|
| a/e_m | | | | | | | | | | | | |
| 1.0 | 0.67 | 0.84 | 1.03 | 1.22 | 1.43 | 1.65 | 1.88 | 2.12 | 2.36 | 2.62 | 2.89 | 3.16 |
| 1.5 | 0.75 | 0.93 | 1.12 | 1.33 | 1.54 | 1.77 | 2.00 | 2.25 | 2.50 | 2.76 | 3.03 | 3.31 |
| 2.0 | 0.83 | 1.02 | 1.22 | 1.43 | 1.65 | 1.89 | 2.12 | 2.38 | 2.63 | 2.90 | 3.18 | 3.46 |
| 2.5 | 0.92 | 1.11 | 1.32 | 1.54 | 1.77 | 2.00 | 2.25 | 2.50 | 2.77 | 3.04 | 3.32 | 3.61 |
| 3.0 | 1.00 | 1.20 | 1.42 | 1.64 | 1.88 | 2.12 | 2.37 | 2.63 | 2.90 | 3.18 | 3.46 | 3.76 |
| 3.5 | | 1.30 | 1.52 | 1.75 | 1.99 | 2.24 | 2.50 | 2.76 | 3.04 | 3.32 | 3.61 | 3.91 |
| 4.0 | | | 1.62 | 1.86 | 2.10 | 2.36 | 2.62 | 2.89 | 3.17 | 3.46 | 3.75 | 4.05 |
| 4.5 | | | | 1.96 | 2.21 | 2.47 | 2.74 | 3.02 | 3.31 | 3.60 | 3.90 | 4.20 |
| 5.0 | | | | | 2.33 | 2.59 | 2.87 | 3.15 | 3.44 | 3.74 | 4.04 | 4.35 |
| 5.5 | | | | | | 2.71 | 2.99 | 3.28 | 3.71 | 4.02 | 4.33 | 4.65 |
| 6.0 | | | | | | | 2.83 | 3.11 | 3.41 | 3.71 | 4.02 | 4.33 |

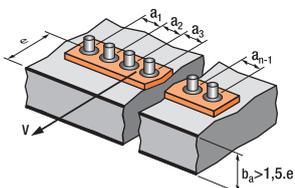

For 3 anchors fastening and more

$$X_{ve} = \frac{3 * e + a_1 + a_2 + a_3 + \dots + a_{n-1}}{3 * n * e_m} * \sqrt{e/e_m}$$

ChemSet™ EPCON™ G5 Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN NEW ZEALAND ONLY


Table 4e Reduced characteristic ultimate concrete pryout capacity, ϕV_{ucp} (kN), $\phi = 1/1.5 = 0.67$, $f'_c = 32$ MPa

| Anchor size, d_b | M10 | M12 | M16 | M20 | M24 | M30 |
|-------------------------|------|------|-------|-------|-------|-------|
| Effective depth, h (mm) | 90 | 110 | 125 | 170 | 210 | 280 |
| -40°C to +40°C | 70.8 | 95.7 | 116.0 | 183.9 | 252.5 | 388.7 |
| -40°C to +60°C | 59.5 | 83.2 | 116.0 | 183.9 | 252.5 | 388.7 |
| -40°C to +75°C | 18.4 | 25.7 | 37.9 | 60.5 | 89.4 | 140.2 |

Table 4f Anchor at a corner effect, concrete edge shear, X_{vs}

Note: For $e_1/e_2 > 1.25$, $X_{vs} = 1.0$

| Edge distance, e_2 (mm) | 25 | 30 | 35 | 50 | 60 | 75 | 125 | 200 | 300 | 400 | 600 | 900 |
|---------------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| Edge distance, e_1 (mm) | | | | | | | | | | | | |
| 25 | 0.86 | 0.77 | 0.70 | 0.58 | 0.53 | 0.49 | 0.41 | 0.37 | 0.35 | 0.34 | 0.32 | 0.32 |
| 30 | 0.97 | 0.86 | 0.78 | 0.64 | 0.58 | 0.52 | 0.43 | 0.38 | 0.36 | 0.34 | 0.33 | 0.32 |
| 35 | 1.00 | 0.95 | 0.86 | 0.69 | 0.63 | 0.56 | 0.46 | 0.40 | 0.37 | 0.35 | 0.33 | 0.32 |
| 50 | 1.00 | 1.00 | 1.00 | 0.86 | 0.77 | 0.67 | 0.52 | 0.44 | 0.39 | 0.37 | 0.35 | 0.33 |
| 60 | 1.00 | 1.00 | 1.00 | 0.97 | 0.86 | 0.75 | 0.57 | 0.47 | 0.41 | 0.38 | 0.36 | 0.34 |
| 75 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.64 | 0.51 | 0.44 | 0.41 | 0.37 | 0.35 |
| 125 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.65 | 0.53 | 0.48 | 0.42 | 0.38 |
| 200 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.67 | 0.58 | 0.49 | 0.42 |
| 300 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.72 | 0.58 | 0.49 |
| 400 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.67 | 0.55 |
| 500 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.77 | 0.61 |
| 600 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.67 |
| 900 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 |



Chemical Anchoring - Anchor Studs

Checkpoint **4a**

Design reduced ultimate concrete edge shear capacity, ϕV_{urc}

$$\phi V_{urc} = \phi V_{uc} * X_{vcr} * X_{vc} * X_{vd} * X_{ve} * X_{vs}$$

Checkpoint **4b**

Design reduced ultimate concrete pryout capacity, ϕV_{urcp}

$$\phi V_{urcp} = \phi V_{ucp} * X_{ncr} * X_{nc} * X_{ne} * X_{na}$$

STEP **5**

Verify anchor shear capacity - per anchor

Table 5a Reduced characteristic ultimate steel shear capacity, ϕV_{us} (kN) where $\phi_v = 0.67$

| Anchor size, d_b | M10 | M12 | M16 | M20 | M24 | M30 |
|---|------|------|------|------|-------|-------|
| ChemSet™ Anchor Stud Grade 5.8 Carbon Steel | 11.8 | 17.5 | 33.1 | 49.9 | 72.3 | - |
| ChemSet™ Anchor Stud A4/316 Stainless Steel | 14.2 | 21.1 | 41.4 | 62.4 | 90.4 | - |
| ChemSet™ Anchor Stud Grade 8.8 Carbon Steel | 17.5 | 26.0 | 50.9 | 76.8 | 111.3 | 185.5 |

Checkpoint **5**

Design reduced ultimate shear capacity, ϕV_{ur}

$$\phi V_{ur} = \text{minimum of } \phi V_{urc}, \phi V_{urcp}, \phi V_{us}$$

Check $V^*/\phi V_{ur} \leq 1.0$,

if not satisfied return to step 1

ChemSet™ EPCON™ G5 Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN NEW ZEALAND ONLY

STEP 6 Combined Loading

Checkpoint 6

Check

$N^*/\phi N_{ur} + V^*/\phi V_{ur} \leq 1.2$,
if not satisfied return to step 1

Specify - Threaded Stud Anchors
Ramset™ EPCON™ G5 Xtrem™ with (Anchor Size) grade 5.8 Chemset™ Anchor Stud (Anchor Stud Part Number) Drilled Hole Depth to be (h) mm.

Example
Ramset™ EPCON™ G5 Xtrem™ Injection with M16 grade 5.8 Chemset™ Anchor Stud (CS16190GH). Drilled hole depth to be 125mm. To be installed according to Ramset™ Installation Instructions.

Ramset™ iExpert Anchor Software for optimised calculation or where a greater range of anchor layout detail is needed.

ChemSet™ EPCON™ G5 Xtrem™

CHEMICAL INJECTION - NON-CRACKED & CRACKED CONCRETE

AVAILABLE IN NEW ZEALAND ONLY

(Australia refer to ChemSet™ Reo502™ Xtrem™ range)

Chemical Anchoring - Reinforcing Bar Anchorage

GENERAL INFORMATION

Performance Related



Installation Related



Product

ChemSet™ EPCON™ G5 Xtrem™ is a heavy duty pure Epoxy for anchoring threaded studs and reinforcing bar into cracked and uncracked concrete.

Compliance

European Technical Assessment - ETA-25/0648

Design according to:


- AS 5216 (formerly TS101)
- EN 1992-4 (formerly ETAG001 Annex C, E & TR045)
- Use enclosed data for simplified calculation method

Use Ramset™ iExpert Anchor Software for optimised calculation or where a greater range of anchor layout detail is needed.

Benefits, Advantages and Features

- 100 year working Life
- Greater productivity:**
 - Easy dispensing even in cold weather
 - Anchors in dry, damp, wet or flooded holes
- Greater security:**
 - Strong bond
 - Rated for sustained loading
- Versatile:**
 - Anchors in carbide drilled and diamond drilled holes*
 - Cold and temperate climates
- Greater safety:**
 - Low odour
 - VOC Compliant

Installation

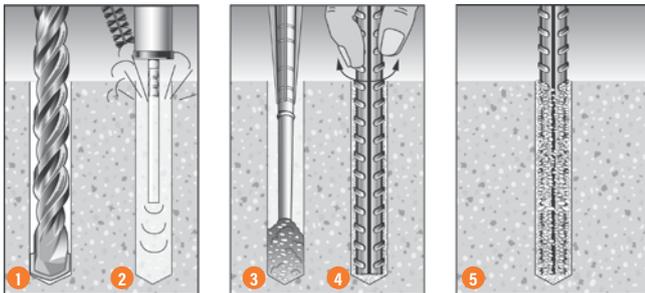

- Drill recommended diameter and depth hole.
- Important:** For hammer drilling technique clean dust and debris from hole with stiff wire brush and blower in the following sequence: blow x 2, brush x 2, blow x 2, brush x 2, blow x 2. For diamond drilling technique refer to **ETA-25/0648**
- Screw mixing nozzle onto cartridge and dispense adhesive to waste until colour is orange. Insert mixing nozzle to bottom of hole. Fill hole to 2/3 the hole depth slowly, ensuring no air pockets form.
- Insert Ramset™ ChemSet™ Anchor Stud/rebar to bottom of hole while turning.
- Allow ChemSet™ EPCON™ G5 Xtrem™ to cure as per setting times.



Principal Applications

- Threaded Studs
- Starter Bars
- Threaded Inserts
- Over-head installation
- Steel Columns
- Hand Rails
- Road Stitching

Recommended Installation Temperatures

| | Minimum | Maximum |
|-----------|---------|---------|
| Substrate | 5°C | 40°C |
| Adhesive | 5°C | 40°C |

Service Temperature Limits

| |
|--------------------|
| T1: -40°C to +40°C |
| T2: -40°C to +60°C |
| T3: -40°C to +75°C |

Setting Times

| Temperature of base material | Gel Time | Curing time in dry concrete | Curing time in wet and flooded concrete |
|------------------------------|----------|-----------------------------|---|
| 5°C | 75 min | 30h | 60 h |
| 10°C | 45 min | 22h | 44 h |
| 15°C | 35 min | 14h | 28 h |
| 20°C | 22 min | 7h | 14 h |
| 25°C | 14 min | 5h | 10 h |
| 30°C | 8 min | 4h | 8 h |
| 35°C | 6 min | 3h | 6h |
| 40°C | 4 min | 2h 45min | 5h 30min |

ChemSet™ EPCON™ G5 Xtrem™

CHEMICAL INJECTION - NON-CRACKED & CRACKED CONCRETE

AVAILABLE IN NEW ZEALAND ONLY

Installation and performance details: ChemSet™ EPCON™ G5 Xtrem™ and Reinforcing Bar

Chemical Anchoring - Reinforcing Bar Anchorage

| Anchor Size, d_b (mm) | Drilled Hole diam., d_h (mm) | Anchor Effective Depth, h (mm) | Optimum dimensions* | | | Reduced Characteristic Capacity # | | | | |
|-------------------------|--------------------------------|----------------------------------|----------------------------|----------------------------|--|-----------------------------------|---------------------------|---------------------------------------|-------|-------|
| | | | Edge* distance, e_c (mm) | Anchor spacing, a_c (mm) | Concrete substrate thickness, b_m (mm) | Gr 500 Rebar - Steel | | Non-Cracked Concrete | | |
| | | | | | | Tension, ϕN_{us} (kN)*** | Shear, ϕV_{us} (kN) | Tension, ϕN_{uc} (kN)** | | |
| | | | | | | | | Concrete compressive strength, f'_c | | |
| 20 MPa | 32 MPa | 40 MPa | | | | | | | | |
| 10 | 12 | 90 | 135 | 270 | 115 | 31.4 | 21.4 | 27.3 | 27.3 | 27.3 |
| 12 | 15 | 110 | 165 | 330 | 140 | 45.2 | 30.8 | 37.8 | 41.0 | 41.5 |
| 16 | 20 | 125 | 187 | 375 | 160 | 80.4 | 54.8 | 45.8 | 58.0 | 62.4 |
| 20 | 25 | 150 | 225 | 450 | 190 | 125.6 | 85.7 | 60.2 | 76.2 | 85.2 |
| | | 170 | 255 | 510 | 215 | | | 72.7 | 91.9 | 102.8 |
| 25 | 30 | 180 | 270 | 540 | 215 | 196.4 | 133.9 | 79.2 | 100.2 | 112.0 |
| | | 210 | 315 | 630 | 275 | | | 99.8 | 126.2 | 141.1 |
| 32 | 40 | 240 | 360 | 720 | 320 | 321.6 | 219.3 | 121.9 | 154.2 | 172.4 |
| | | 300 | 450 | 900 | 380 | | | 170.4 | 215.6 | 241.0 |

* Note: For shear loads acting towards an edge or where these optimum dimensions are not achievable, please use the simplified strength limit state design process to verify capacity.

**Note: Reduced characteristic ultimate concrete tensile capacity = ϕN_{uc} and N_{uc} = Characteristic ultimate concrete tensile capacity. For value of ϕ refer to Table 2a

For conversion to Working Load Limit MULTIPLY ϕN_{uc} x 0.5

***Note: Reduced characteristic ultimate steel tensile capacity = ϕN_{us} where $\phi = 0.8$ and N_{us} = Characteristic ultimate steel tensile capacity.

For conversion to Working Load Limit MULTIPLY ϕN_{us} x 0.56

#Note: Design Tensile Capacity ϕN_{us} = minimum of ϕN_{uc} and ϕN_{us}

For Cracked Concrete performance, please use the simplified strength limit state design process to verify capacity.

Data is based on a Service temperature limit of -40°C to +40°C

All data relevant for Dry and Wet Holes. For Flooded Holes MULTIPLY ϕN_{uc} x 0.65

For optimised performance data, including performance based on diamond drilling technique, please use Ramset iExpert Anchoring Software.

DESCRIPTION AND PART NUMBERS

| Description | Cartridge Size | Part No. |
|---------------------------|----------------|----------|
| ChemSet™ EPCON™ G5 Xtrem™ | 600ml | CEG5X600 |

Typical Engineering Properties of Grade 500 Reinforcing Bar

| Rebar Size | 10 | 12 | 16 | 20 | 25 | 32 |
|---|------|------|-------|-------|-------|-------|
| Drilled Hole Dia, d_h (mm) | 12 | 15 | 20 | 25 | 30 | 40 |
| Stress Area, A_s (mm ²) | 78.5 | 113 | 201 | 314 | 491 | 804 |
| Yield Stress, f_{sy} (MPa) | 500 | 500 | 500 | 500 | 500 | 500 |
| Tensile Steel Yield Capacity, N_{sy} (kN) | 39.3 | 56.5 | 100.5 | 157.0 | 245.5 | 402.0 |

For further information refer to reinforcing bar manufacturer's published information and current revision of AS/NZS 4671

ChemSet™ Reo 502™ Xtrem™

CHEMICAL INJECTION - NON-CRACKED & CRACKED CONCRETE

AVAILABLE IN AUSTRALIA ONLY

Chemical Anchoring - Reinforcing Bar Anchorage

STEP 1

Select anchor to be evaluated

Table 1a Indicative combined loading - interaction diagram

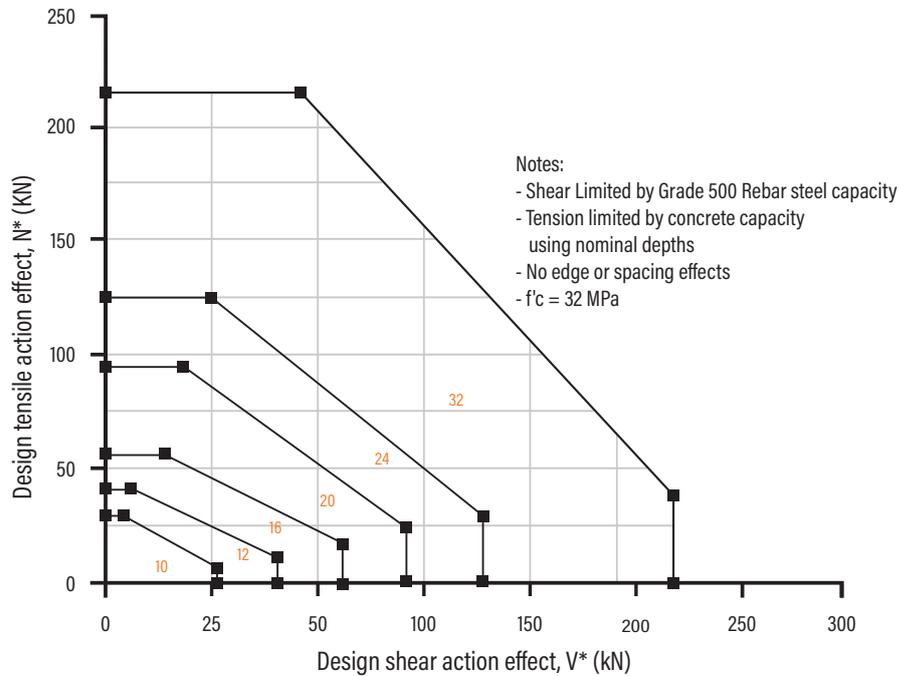


Table 1b Absolute minimum edge distance and anchor spacing values, e_m and a_m (mm)

| Anchor size, d _b | 10 | 12 | 16 | 20 | 24 | 32 |
|--------------------------------------|----|----|----|----|----|-----|
| Min. Anchor Spacing - a _m | 40 | 50 | 70 | 85 | 90 | 140 |
| Min. Edge Distance - e _m | 40 | 40 | 45 | 55 | 60 | 90 |

Step 1c Calculate anchor effective depth, h (mm)

Refer to nominal recommended effective depths, h, listed in installation and performance details table on previous page.

Effective depth, h (mm)

Preferred $h = h_n$ otherwise,

$h = L_e - t$

t = total thickness of material(s) being fastened.

| Substrate thickness b _m (mm) | | |
|---|----|----------------------|
| Anchor Stud Size (mm) | | |
| 10 | 12 | 16 to 32 |
| $h + 30\text{mm} \geq 100\text{mm}$ | | $h + (2 \times d_n)$ |

Checkpoint 1

Anchor size determined, absolute minima compliance achieved, effective depth (h) calculated.

ChemSet™ Reo 502™ Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN AUSTRALIA ONLY

STEP 2 Verify concrete tensile capacity - per anchor

Table 2a Reduced characteristic ultimate concrete tensile capacity, ϕN_{uc} (kN), $\phi_c = 1/1.5 = 0.67$, $f'_c = 32$ MPa

| Rebar Size, d_b | Combined pull-out and concrete cone resistance - ϕN_{ucp} | | | | | | Concrete Cone Resistance - ϕN_{ucc} |
|------------------------------|---|------|-------|-------|-------|-------|---|
| | 10 | 12 | 16 | 20 | 24 | 32 | |
| Drilled Hole Dia, d_h (mm) | 12 | 15 | 20 | 25 | 30 | 40 | |
| Effective Depth, h (mm) | | | | | | | |
| 70 | 21.3 | | | | | | 24.3 |
| 80 | 24.3 | | | | | | 29.7 |
| 90 | 27.3 | 33.6 | | | | | 35.4 |
| 100 | 30.4 | 37.3 | | | | | 41.5 |
| 110 | 33.4 | 41.0 | | | | | 47.9 |
| 120 | 36.4 | 44.8 | 59.3 | | | | 54.5 |
| 125 | 38.0 | 46.6 | 61.8 | | | | 58.0 |
| 140 | 42.5 | 52.2 | 69.2 | | | | 68.7 |
| 150 | 45.6 | 56.0 | 74.1 | 92.6 | | | 76.2 |
| 160 | 48.6 | 59.7 | 79.0 | 98.8 | | | 84.0 |
| 170 | 51.6 | 63.4 | 84.0 | 105.0 | | | 91.9 |
| 180 | 54.7 | 67.2 | 88.9 | 111.2 | 135.6 | | 100.2 |
| 190 | 57.7 | 70.9 | 93.9 | 117.3 | 143.1 | | 108.6 |
| 200 | 60.7 | 74.6 | 98.8 | 123.5 | 150.7 | | 117.3 |
| 210 | | 78.3 | 103.7 | 129.7 | 158.2 | | 126.2 |
| 240 | | 89.5 | 118.6 | 148.2 | 180.8 | 241.1 | 154.2 |
| 270 | | | 133.4 | 166.7 | 203.4 | 271.2 | 184.0 |
| 280 | | | 138.3 | 172.9 | 210.9 | 281.3 | 194.4 |
| 300 | | | 148.2 | 185.3 | 226.0 | 301.4 | 215.6 |
| 320 | | | 158.1 | 197.6 | 241.1 | 321.4 | 237.5 |
| 350 | | | | 216.1 | 263.7 | 351.6 | 271.6 |
| 400 | | | | 247.0 | 301.4 | 401.8 | 331.9 |
| 450 | | | | | 339.0 | 452.0 | 396.0 |
| 480 | | | | | 361.6 | 482.2 | 436.3 |
| 560 | | | | | | 562.5 | 549.7 |
| 640 | | | | | | 642.9 | 671.7 |

For optimised performance data, including performance based on diamond drilling technique, please use Ramset iExpert Anchoring Software.

Table 2a-2 Cracked Concrete effect, tension, X_{ncr}

| Rebar Size, d_b | Cracked Concrete Effect - X_{ncr} | | | | | | X_{ncr} |
|-------------------|--|------|------|------|------|------|--|
| | where $\phi N_{uc} = \phi N_{ucp}$ (from Table 2a) | | | | | | |
| f'c (MPa) | 10 | 12 | 16 | 20 | 24 | 32 | where $\phi N_{uc} = \phi N_{ucc}$ (from Table 2a) |
| 20 to 50 | 0.74 | 0.73 | 0.71 | 0.70 | 0.70 | 0.67 | 0.70 |

Bold values are at Chemset Anchor Stud nominal Depths. For Sustained Loads MULTIPLY ϕN_{uc} x 0.72 (100 years) All data relevant for Dry and Wet Holes.

For Flooded Holes MULTIPLY ϕN_{uc} x 0.65. For Non-cracked concrete $X_{ncr} = 1.0$.

Calculate ϕN_{uc} for both ϕN_{ucp} and ϕN_{ucc} then choose the minimum - Refer to Checkpoint 2

Table 2b-1 Concrete service temperature limits effect, tension, X_{ns}

| Rebar Size, d_b | Service temperature limits effect, tension, X_{ns} | | | | | | X_{ns} |
|--------------------------|--|----|----|------|----|----|--|
| | where $\phi N_{uc} = \phi N_{ucp}$ (from Table 2a) | | | | | | |
| Service temperature (°C) | 10 | 12 | 16 | 20 | 24 | 32 | where $\phi N_{uc} = \phi N_{ucc}$ (from Table 2a) |
| T1: -40°C to +40°C | | | | 1.00 | | | 1.00 |
| T2: -40°C to +60°C | | | | 0.84 | | | |
| T3: -40°C to +75°C | | | | 0.25 | | | |

Table 2b-2 Concrete compressive strength effect, tension, X_{nc}

| NON-CRACKED | Non-Cracked Concrete - X_{nc} | | | | | | X_{nc} |
|--------------------|--|------|------|------|------|------|--|
| | where $\phi N_{uc} = \phi N_{ucp}$ (from Table 2a) | | | | | | |
| Anchor Size, d_b | 10 | 12 | 16 | 20 | 24 | 32 | where $\phi N_{uc} = \phi N_{ucc}$ (from Table 2a) |
| f'c (MPa) | | | | | | | |
| 20 | 1.00 | 0.98 | 0.98 | 0.98 | 0.95 | 0.95 | 0.79 |
| 25 | 1.00 | 0.99 | 0.99 | 0.99 | 0.97 | 0.97 | 0.88 |
| 32 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| 40 | 1.00 | 1.01 | 1.01 | 1.01 | 1.02 | 1.02 | 1.12 |
| 50 | 1.00 | 1.02 | 1.02 | 1.02 | 1.04 | 1.04 | 1.25 |

| CRACKED | Cracked Concrete - X_{nc} | | | | | | X_{nc} |
|--------------------|--|------|------|------|------|------|--|
| | where $\phi N_{uc} = \phi N_{ucp}$ (from Table 2a) | | | | | | |
| Anchor Size, d_b | 10 | 12 | 16 | 20 | 24 | 32 | where $\phi N_{uc} = \phi N_{ucc}$ (from Table 2a) |
| f'c (MPa) | | | | | | | |
| 20 | 0.95 | 0.95 | 0.95 | 0.91 | 0.88 | 0.87 | 0.79 |
| 25 | 0.97 | 0.97 | 0.97 | 0.95 | 0.94 | 0.93 | 0.88 |
| 32 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| 40 | 1.02 | 1.02 | 1.02 | 1.04 | 1.04 | 1.07 | 1.12 |
| 50 | 1.04 | 1.04 | 1.04 | 1.09 | 1.09 | 1.14 | 1.25 |


Chemical Anchoring - Reinforcing Bar Anchorage

ChemSet™ EPCON™ G5 Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN NEW ZEALAND ONLY

Chemical Anchoring - Reinforcing Bar Anchorage

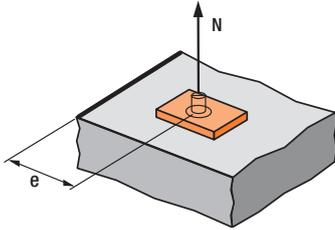

$$X_{ne} = 0.25 + 0.5 \cdot (e/h)$$


Where $e_m \leq e \leq e_c$

$$e_c = 1.5 \cdot h$$

Note: Tabled values are based on the nominal effective depth, h shown in the installation details. For other values of X_{ne} , please use equation shown above.

Table 2c - Concrete Edge distance effect, tension, X_{ne}

| Anchor size, d_b | 10 | 12 | 16 | 20 | 25 | 32 |
|------------------------------|------|------|------|------|------|------|
| Edge distance, e (mm) | | | | | | |
| 40 | 0.47 | 0.43 | | | | |
| 45 | 0.50 | 0.45 | 0.43 | | | |
| 50 | 0.53 | 0.48 | 0.45 | | | |
| 55 | 0.56 | 0.50 | 0.47 | 0.41 | | |
| 60 | 0.58 | 0.52 | 0.49 | 0.43 | 0.39 | |
| 65 | 0.61 | 0.55 | 0.51 | 0.44 | 0.40 | |
| 70 | 0.64 | 0.57 | 0.53 | 0.46 | 0.42 | |
| 90 | 0.75 | 0.66 | 0.61 | 0.51 | 0.46 | 0.40 |
| 100 | 0.81 | 0.70 | 0.65 | 0.54 | 0.49 | 0.42 |
| 115 | 0.89 | 0.77 | 0.71 | 0.59 | 0.52 | 0.44 |
| 135 | 1 | 0.86 | 0.79 | 0.65 | 0.57 | 0.48 |
| 165 | | 1 | 0.91 | 0.74 | 0.64 | 0.53 |
| 187 | | | 1 | 0.80 | 0.70 | 0.56 |
| 255 | | | | 1 | 0.86 | 0.68 |
| 315 | | | | | 1 | 0.78 |
| 450 | | | | | | 1 |

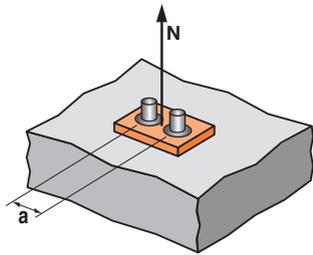

$$X_{na} = 0.5 + a/(6 \cdot h)$$

Where $a_m \leq a \leq a_c$

$$a_c = 3 \cdot h$$

Note: Tabled values are based on the nominal effective depth, h shown in the installation details. For other values X_{na} , please use equation shown above.

Table 2d - Concrete anchor spacing effect, tension, X_{na}

| Anchor size, d_b | 10 | 12 | 16 | 20 | 25 | 32 |
|-------------------------------|------|------|------|------|------|------|
| Anchor spacing, a (mm) | | | | | | |
| 40 | 0.57 | | | | | |
| 45 | 0.58 | | | | | |
| 50 | 0.59 | 0.58 | | | | |
| 55 | 0.60 | 0.58 | | | | |
| 60 | 0.61 | 0.59 | | | | |
| 70 | 0.63 | 0.61 | 0.59 | | | |
| 85 | 0.66 | 0.63 | 0.61 | 0.58 | | |
| 90 | 0.67 | 0.64 | 0.62 | 0.59 | 0.57 | |
| 140 | 0.76 | 0.71 | 0.69 | 0.64 | 0.61 | 0.58 |
| 170 | 0.81 | 0.76 | 0.73 | 0.67 | 0.63 | 0.59 |
| 200 | 0.87 | 0.80 | 0.77 | 0.70 | 0.66 | 0.61 |
| 270 | 1 | 0.91 | 0.86 | 0.76 | 0.71 | 0.65 |
| 330 | | 1 | 0.94 | 0.82 | 0.76 | 0.68 |
| 375 | | | 1 | 0.87 | 0.80 | 0.71 |
| 510 | | | | 1 | 0.90 | 0.78 |
| 630 | | | | | 1 | 0.85 |
| 900 | | | | | | 1 |

Checkpoint **2**

Design reduced ultimate concrete tensile capacity, ϕN_{urc}

$$\phi N_{urc} = \text{minimum of } \phi N_{ucp} \cdot X_{ncr} \cdot X_{ns} \cdot X_{nc} \cdot X_{ne} \cdot X_{na} \text{ and } \phi N_{ucc} \cdot X_{ncr} \cdot X_{ns} \cdot X_{nc} \cdot X_{ne} \cdot X_{na}$$

STEP **3**

Verify anchor tensile capacity - per anchor

Table 3a Reduced characteristic ultimate steel tensile capacity, ϕN_{us} (kN), where $\phi = 0.8$

| Anchor size, d_b | 10 | 12 | 16 | 20 | 24 | 32 |
|--------------------|------|------|------|-------|-------|-------|
| Gr 500 Rebar | 31.4 | 45.2 | 80.4 | 125.6 | 196.4 | 321.6 |

Checkpoint **3**

Design reduced ultimate tensile capacity, ϕN_{ur}

$$\phi N_{ur} = \text{minimum of } \phi N_{urc}, \phi N_{us}$$

Check $N^*/\phi N_{ur} \leq 1.0$,

if not satisfied return to step 1

ChemSet™ EPCON™ G5 Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN NEW ZEALAND ONLY

Chemical Anchoring - Reinforcing Bar Anchorage

STEP 4

Step 4 - Verify Concrete Edge Shear Resistance - per anchor

Table 4a-1 Reduced characteristic ultimate concrete edge shear capacity, ϕV_{uc} (kN), $\phi = 1/1.5 = 0.67$, $f'_c = 32$ MPa

| Rebar size, d_b | 10 | 12 | 16 | 20 | 25 | 32 |
|---------------------------|----------|----------|-----------|-----------|-----------|-----------|
| Effective depth, h (mm) | 70 - 200 | 90 - 240 | 120 - 320 | 150 - 400 | 180 - 500 | 240 - 640 |
| Edge distance, e_m | | | | | | |
| 40 | 4.3 | 4.7 | | | | |
| 45 | | | 6.3 | | | |
| 55 | | | | 9.1 | | |
| 60 | | | | | 11.2 | |
| 90 | | | | | | 21.3 |

For optimised performance data, please use Ramset iExpert Anchoring Software.


Table 4a-2 Cracked Concrete effect, shear, X_{vcr}

| Anchor size, d_b | 10 | 12 | 16 | 20 | 25 | 32 |
|--------------------|------|----|----|----|----|----|
| X_{vcr} | 0.70 | | | | | |

For Non-cracked concrete $X_{vcr} = 1.0$

Table 4b - Concrete compressive strength effect, shear, X_{vc}


| f'_c (MPa) | 20 | 25 | 32 | 40 | 50 |
|--------------|------|------|----|------|------|
| X_{vc} | 0.79 | 0.86 | 1 | 1.11 | 1.22 |



Load direction effect, conc. edge shear, X_{vd}

Table 4c - Concrete load direction effect, concrete edge shear, X_{vd}

| Angle, α° | 0-55 | 60 | 70 | 80 | 90-180 |
|-----------------------|------|-----|-----|-----|--------|
| X_{vd} | 1 | 1.1 | 1.2 | 1.5 | 2 |

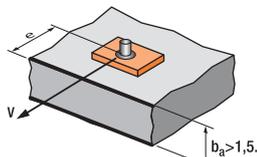


$$X_{ve} = e/e_m * \sqrt{e/e_m}$$

Table 4d - Concrete anchor spacing and edge distance effect, concrete edge shear, X_{ve}

For single anchor fastening X_{ve}


| e/e_m | 1.0 | 1.2 | 1.4 | 1.6 | 1.8 | 2.0 | 2.2 | 2.4 | 2.6 | 2.8 | 3.0 | 3.2 |
|----------|------|------|------|------|------|------|------|------|------|------|------|------|
| X_{ve} | 1.00 | 1.31 | 1.66 | 2.02 | 2.41 | 2.83 | 3.26 | 3.72 | 4.19 | 4.69 | 5.20 | 5.72 |

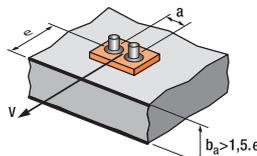

$$X_{ve} = \frac{3 * e + a}{6 * e_m} * \sqrt{e/e_m}$$

For 2 anchors fastening X_{ve}

| e/e_m | 1.0 | 1.2 | 1.4 | 1.6 | 1.8 | 2.0 | 2.2 | 2.4 | 2.6 | 2.8 | 3.0 | 3.2 |
|---------|------|------|------|------|------|------|------|------|------|------|------|------|
| a/e_m | | | | | | | | | | | | |
| 1.0 | 0.67 | 0.84 | 1.03 | 1.22 | 1.43 | 1.65 | 1.88 | 2.12 | 2.36 | 2.62 | 2.89 | 3.16 |
| 1.5 | 0.75 | 0.93 | 1.12 | 1.33 | 1.54 | 1.77 | 2.00 | 2.25 | 2.50 | 2.76 | 3.03 | 3.31 |
| 2.0 | 0.83 | 1.02 | 1.22 | 1.43 | 1.65 | 1.89 | 2.12 | 2.38 | 2.63 | 2.90 | 3.18 | 3.46 |
| 2.5 | 0.92 | 1.11 | 1.32 | 1.54 | 1.77 | 2.00 | 2.25 | 2.50 | 2.77 | 3.04 | 3.32 | 3.61 |
| 3.0 | 1.00 | 1.20 | 1.42 | 1.64 | 1.88 | 2.12 | 2.37 | 2.63 | 2.90 | 3.18 | 3.46 | 3.76 |
| 3.5 | | 1.30 | 1.52 | 1.75 | 1.99 | 2.24 | 2.50 | 2.76 | 3.04 | 3.32 | 3.61 | 3.91 |
| 4.0 | | | 1.62 | 1.86 | 2.10 | 2.36 | 2.62 | 2.89 | 3.17 | 3.46 | 3.75 | 4.05 |
| 4.5 | | | | 1.96 | 2.21 | 2.47 | 2.74 | 3.02 | 3.31 | 3.60 | 3.90 | 4.20 |
| 5.0 | | | | | 2.33 | 2.59 | 2.87 | 3.15 | 3.44 | 3.74 | 4.04 | 4.35 |
| 5.5 | | | | | | 2.71 | 2.99 | 3.28 | 3.71 | 4.02 | 4.33 | 4.65 |
| 6.0 | | | | | | | 2.83 | 3.11 | 3.41 | 3.71 | 4.02 | 4.33 |

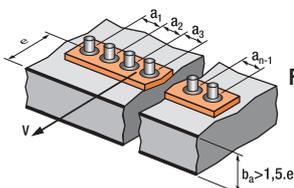

For 3 anchors fastening and more

$$X_{ve} = \frac{3 * e + a_1 + a_2 + a_3 + \dots + a_{n-1}}{3 * n * e_m} * \sqrt{e/e_m}$$

ChemSet™ EPCON™ G5 Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN NEW ZEALAND ONLY

Chemical Anchoring - Reinforcing Bar Anchorage




Table 4e Reduced characteristic ultimate concrete pryout capacity, ϕV_{ucp} (kN), $\phi = 1/1.5 = 0.67$, $f'_c = 32$ MPa

| Rebar size, d_h | 10 | 12 | 16 | 20 | 25 | 32 |
|---------------------------|------|------|-------|-------|-------|-------|
| Effective depth, h (mm) | 90 | 110 | 125 | 170 | 210 | 300 |
| T1: -40°C to +40°C | 54.7 | 82.1 | 116.0 | 183.9 | 252.5 | 431.1 |
| T2: -40°C to +60°C | 45.9 | 68.9 | 103.7 | 176.4 | 252.5 | 431.1 |
| T3: -40°C to +75°C | 13.7 | 20.5 | 30.9 | 52.5 | 82.4 | 150.7 |

Table 4f Anchor at a corner effect, concrete edge shear, X_{vs}

Note: For $e_1/e_2 > 1.25$, $X_{vs} = 1.0$

| Edge distance, e_2 (mm) | 25 | 30 | 35 | 50 | 60 | 75 | 125 | 200 | 300 | 400 | 600 | 900 |
|---------------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| Edge distance, e_1 (mm) | | | | | | | | | | | | |
| 25 | 0.86 | 0.77 | 0.70 | 0.58 | 0.53 | 0.49 | 0.41 | 0.37 | 0.35 | 0.34 | 0.32 | 0.32 |
| 30 | 0.97 | 0.86 | 0.78 | 0.64 | 0.58 | 0.52 | 0.43 | 0.38 | 0.36 | 0.34 | 0.33 | 0.32 |
| 35 | 1.00 | 0.95 | 0.86 | 0.69 | 0.63 | 0.56 | 0.46 | 0.40 | 0.37 | 0.35 | 0.33 | 0.32 |
| 50 | 1.00 | 1.00 | 1.00 | 0.86 | 0.77 | 0.67 | 0.52 | 0.44 | 0.39 | 0.37 | 0.35 | 0.33 |
| 60 | 1.00 | 1.00 | 1.00 | 0.97 | 0.86 | 0.75 | 0.57 | 0.47 | 0.41 | 0.38 | 0.36 | 0.34 |
| 75 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.64 | 0.51 | 0.44 | 0.41 | 0.37 | 0.35 |
| 125 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.65 | 0.53 | 0.48 | 0.42 | 0.38 |
| 200 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.67 | 0.58 | 0.49 | 0.42 |
| 300 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.72 | 0.58 | 0.49 |
| 400 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.67 | 0.55 |
| 500 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.77 | 0.61 |
| 600 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.67 |
| 900 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 |

Checkpoint **4a**

Design reduced ultimate concrete edge shear capacity, ϕV_{urc}

$$\phi V_{urc} = \phi V_{uc} * X_{vcr} * X_{vc} * X_{vd} * X_{ve} * X_{vs}$$

Checkpoint **4b**

Design reduced ultimate concrete pryout capacity, ϕV_{urcp}

$$\phi V_{urcp} = \phi V_{ucp} * X_{ncr} * X_{nc} * X_{ne} * X_{na}$$

STEP **5**

Verify anchor shear capacity - per anchor

Table 5a Reduced characteristic ultimate steel shear capacity, ϕV_{us} (kN) where $\phi_v = 0.67$

| Anchor size, d_h | 10 | 12 | 16 | 20 | 25 | 32 |
|--------------------|------|------|------|------|-------|-------|
| Gr 500 Rebar | 21.4 | 30.8 | 54.8 | 85.7 | 133.9 | 219.3 |

Checkpoint **5**

Design reduced ultimate shear capacity, ϕV_{ur}

$$\phi V_{ur} = \text{minimum of } \phi V_{urc}, \phi V_{urcp}, \phi V_{us}$$

Check $V^*/\phi V_{ur} \leq 1.0$,

if not satisfied return to step 1

ChemSet™ EPCON™ G5 Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN NEW ZEALAND ONLY

STEP 6 Combined loading and specification

Checkpoint 6

Check

$N^*/\phi N_{ur} + V^*/\phi V_{ur} \leq 1.2,$
if not satisfied return to step 1

Specify - Reinforcing Bar Anchorage

Ramset™ EPCON™ G5 Xtrem™ Injection
(Anchor Size) grade 500 Rebar.
Drilled hole depth to be (h) mm.

Example

Ramset™ EPCON™ G5 Xtrem™ Injection
with 16mm grade 500 Rebar
Drilled hole depth to be 125 mm.
To be installed in accordance with
Ramset Installation Instructions.

Ramset™ iExpert Anchor Software for optimised calculation or where a greater range of anchor layout detail is needed.

Chemset™ EPCON™ G5 Xtrem™

FIRE RATED CHEMICAL ANCHOR

AVAILABLE IN NEW ZEALAND ONLY

(Australia refer to ChemSet™ Reo502™ Xtrem™ range)

Fire Rated Anchoring Systems

GENERAL INFORMATION

Performance Related



Installation Related



Product

ChemSet™ EPCON™ G5 Xtrem™ is a heavy duty pure Epoxy for anchoring threaded studs and reinforcing bar into cracked and uncracked concrete.



Compliance

European Technical Assessment - ETA-25/0647 and ETA-25/1142

Design according to:

- AS 5216 (formerly TS101)
- EN 1992-4 (formerly ETAG001 Annex C, E & TR045)
- Fire Design according to EN 1992-1-1 and EN 1992-1-2.
- Use enclosed data for simplified calculation method

Use Ramset™ iExpert Anchor Software for optimised calculation or where a greater range of anchor layout detail is needed

Benefits, Advantages and Features

- 120 year working Life
- Fire tested to European Assessment Document

Greater productivity:

- Anchors in dry, damp, wet or flooded holes
- Easy dispensing even in cold weather

Greater security:

- Strong bond
- Rated for sustained loading

Versatile:

- Anchors in carbide drilled and diamond drilled holes
- Cold and temperate climates

Greater safety:


- Low odour
- VOC Compliant
- Suitable for contact with drinking water



Principal Applications

- Threaded Studs
- Starter Bars
- Threaded Inserts
- Over-head installation
- Steel Columns
- Hand Rails
- Road Stitching

Installation

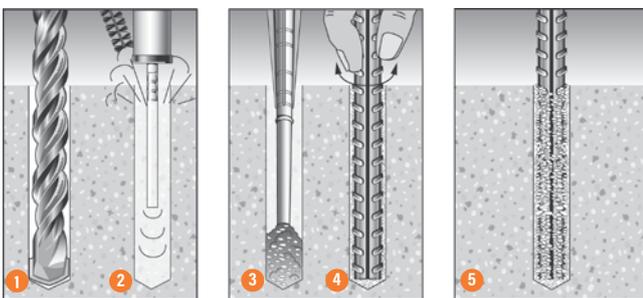

1. Drill recommended diameter and depth hole.
2. **Important:** For hammer drilling technique clean dust and debris from hole with wire brush and blower in the following sequence: blow x 2, brush x 2, blow x 2, brush x 2, blow x 2.
3. Screw mixing nozzle onto cartridge and dispense adhesive to waste until colour is orange. Insert mixing nozzle to bottom of hole. Fill hole to 2/3 the hole depth slowly, ensuring no air pockets form.
4. Insert Ramset™ ChemSet™ Anchor Stud/rebar to bottom of hole while turning.
5. Allow Chemset™ EPCON™ G5 Xtrem™ to cure as per setting times.

Recommended Installation Temperatures

| | Minimum | Maximum |
|-----------|---------|---------|
| Substrate | 5°C | 40°C |
| Adhesive | 5°C | 40°C |

Service Temperature Limits

| |
|----------------|
| -40°C to +75°C |
|----------------|

Setting Times

| Temperature of base material | Gel Time | Curing time in dry concrete | Curing time in wet and flooded concrete |
|------------------------------|----------|-----------------------------|---|
| 5°C | 75 min | 30h | 60 h |
| 10°C | 45 min | 22h | 44 h |
| 15°C | 35 min | 14h | 28 h |
| 20°C | 22 min | 7h | 14 h |
| 25°C | 14 min | 5h | 10 h |
| 30°C | 8 min | 4h | 8 h |
| 35°C | 6 min | 3h | 6h |
| 40°C | 4 min | 2h 45min | 5h 30min |

Chemset™ EPCON™ G5 Xtrem™

FIRE RATED CHEMICAL ANCHOR

AVAILABLE IN NEW ZEALAND ONLY

Installation Details

ChemSet™ EPCON™ G5 Xtrem™ with Reinforcing Bar

| Anchor size, d_h (mm) | Drilled hole diameter, d_h (mm) |
|-------------------------|-----------------------------------|
| 10 | 12 |
| 12 | 15 |
| 16 | 20 |
| 20 | 25 |
| 24 | 30 |
| 25 | 30 |
| 28 | 35 |
| 32 | 40 |
| 36 | 45 |
| 40 | 50 |

DESCRIPTION AND PART NUMBERS

| Description | Cartridge Size | Part No. |
|---------------------------|----------------|----------|
| ChemSet™ EPCON™ G5 Xtrem™ | 600 ml | CEG5X600 |

ENGINEERING PROPERTIES

Typical Engineering Properties of Grade 500 Reinforcing Bar

| Rebar size | 10 | 12 | 16 | 20 | 24 | 25 | 28 | 32 | 36 | 40 |
|--|------|------|-------|-------|-------|-------|-------|-------|-------|-------|
| Drilled hole dia, d_h (mm) | 12 | 15 | 20 | 25 | 30 | 30 | 35 | 40 | 45 | 50 |
| Stress area, A_s (mm ²) | 78.5 | 113 | 201 | 314 | 452 | 491 | 616 | 804 | 1020 | 1260 |
| Yield stress, f_{sy} (MPa) | 500 | 500 | 500 | 500 | 500 | 500 | 500 | 500 | 500 | 500 |
| Tensile steel yield capacity, $N_{us} = N_{sy}$ (kN) | 39.3 | 56.5 | 100.5 | 1570 | 226.0 | 245.5 | 308.0 | 402.0 | 509.0 | 628.0 |
| Design tensile steel resistance ϕN_{us} (kN) | 31.4 | 45.2 | 80.4 | 125.6 | 180.8 | 196.4 | 246.4 | 321.6 | 407.2 | 502.4 |


For further information refer to reinforcing bar manufacturer's published information and current revision of **AS/NZS 4671**

Chemset™ EPCON™ G5 Xtrem™

FIRE RATED CHEMICAL ANCHOR

AVAILABLE IN NEW ZEALAND ONLY

Reinforcing Bar Anchored with ChemSet™ EPCON™ G5 Xtrem™

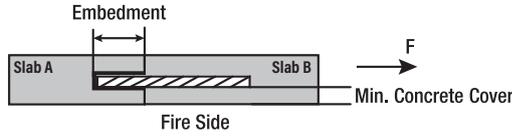

Fire Rated Anchoring Systems

Design Case 1

Fire resistance duration = 30 minutes

For Reinforcing Bar Steel Grade - 500 MPa and Concrete cylinder compressive strength $f'_c = 20$ MPa

| Rebar Size | Hole Diameter (mm) | *Min. Concrete Cover(mm) | **Design resistance in accordance with Eurocode 2 for fire duration 30 minutes - $R_{d,fi}$ (kN) | | | | | | | | | | | | | | | |
|----------------|--------------------|--------------------------|--|-------|-------|-------|-------|--------|--------|--------------|--------------|--------------|--------------|--------------|--------------|---------------|--|--|
| | | | 3.32 | 4.98 | 6.64 | 8.30 | 9.96 | 11.62 | 13.28 | 14.94 | 16.59 | 18.25 | 19.91 | 23.23 | 26.55 | 29.87 | | |
| 10 | 12 | 50 | 3.32 | 4.98 | 6.64 | 8.30 | 9.96 | 11.62 | 13.28 | 14.94 | 16.59 | 18.25 | 19.91 | 23.23 | 26.55 | 29.87 | | |
| | | 70 | 7.63 | 11.45 | 15.26 | 19.08 | 22.89 | 26.71 | 30.52 | 31.42 | | |
| 12 | 15 | 50 | 3.98 | 5.97 | 7.97 | 9.96 | 11.95 | 13.94 | 15.93 | 17.92 | 19.91 | 21.91 | 23.90 | 27.88 | 31.86 | 35.84 | | |
| | | 70 | 9.16 | 13.73 | 18.31 | 22.89 | 27.47 | 32.05 | 36.63 | 41.20 | 45.24 | 45.24 | 45.24 | 45.24 | 45.24 | 45.24 | | |
| 16 | 20 | 50 | | 7.97 | 10.62 | 13.28 | 15.93 | 18.59 | 21.24 | 23.90 | 26.55 | 29.21 | 31.86 | 37.17 | 42.48 | 47.79 | | |
| | | 70 | | 18.31 | 24.42 | 30.52 | 36.63 | 42.73 | 48.83 | 54.94 | 61.04 | 67.15 | 73.25 | 80.42 | 80.42 | 80.42 | | |
| 20 | 25 | 50 | | | 13.28 | 16.59 | 19.91 | 23.23 | 26.55 | 29.87 | 33.19 | 36.51 | 39.83 | 46.47 | 53.10 | 59.74 | | |
| | | 70 | | | 30.52 | 38.15 | 45.78 | 53.41 | 61.04 | 68.67 | 76.30 | 83.93 | 91.56 | 106.83 | 122.09 | 125.66 | | |
| 24 | 30 | 50 | | | | 19.91 | 23.90 | 27.88 | 31.86 | 35.84 | 39.83 | 43.81 | 47.79 | 55.76 | 63.72 | 71.69 | | |
| | | 70 | | | | 45.78 | 54.94 | 64.10 | 73.25 | 82.41 | 91.56 | 100.72 | 109.88 | 128.19 | 146.50 | 164.82 | | |
| 25 | 30 | 50 | | | | 20.74 | 24.89 | 29.04 | 33.19 | 37.34 | 41.49 | 45.64 | 49.78 | 58.08 | 66.38 | 74.68 | | |
| | | 70 | | | | 47.69 | 57.23 | 66.77 | 76.30 | 85.84 | 95.38 | 104.92 | 114.46 | 133.53 | 152.61 | 171.68 | | |
| 28 | 35 | 50 | | | | | 27.88 | 32.53 | 37.17 | 41.82 | 46.47 | 51.11 | 55.76 | 65.05 | 74.34 | 83.64 | | |
| | | 70 | | | | | 64.10 | 74.78 | 85.46 | 96.14 | 106.83 | 117.51 | 128.19 | 149.56 | 170.92 | 192.29 | | |
| 32 | 40 | 50 | | | | | | 37.17 | 42.48 | 47.79 | 53.10 | 58.41 | 63.72 | 74.34 | 84.97 | 95.59 | | |
| | | 70 | | | | | | 85.46 | 97.67 | 109.88 | 122.09 | 134.30 | 146.50 | 170.92 | 195.34 | 219.76 | | |
| 36 | 45 | 50 | | | | | | 41.82 | 47.79 | 53.77 | 59.74 | 65.72 | 71.69 | 83.64 | 95.59 | 107.53 | | |
| | | 70 | | | | | | 96.14 | 109.88 | 123.61 | 137.35 | 151.08 | 164.82 | 192.29 | 219.76 | 247.23 | | |
| 40 | 50 | 50 | | | | | | 46.47 | 53.10 | 59.74 | 66.38 | 73.02 | 79.66 | 92.93 | 106.21 | 119.48 | | |
| | | 70 | | | | | | 106.83 | 122.09 | 137.35 | 152.61 | 167.87 | 183.13 | 213.65 | 244.17 | 274.69 | | |
| Embedment (mm) | | | 100 | 150 | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 550 | 600 | 700 | 800 | 900 | | |

*Note: Minimum concrete cover based on minimum slab thickness of 200mm according to Eurocode 2 Part 1.2 (EN 1992-1-2)

**Note: Performance data based on hammer drilling technique. For data using core drilling technique, please refer to Ramset Engineer.

Bold values depicts design tensile steel resistance governs.

Design Case 2

Fire resistance duration = 60 minutes

For Reinforcing Bar Steel Grade - 500 MPa and Concrete cylinder compressive strength $f'_c = 20$ MPa

| Rebar Size | Hole Diameter (mm) | *Min. Concrete Cover(mm) | **Design resistance in accordance with Eurocode 2 for fire duration 60 minutes - $R_{d,fi}$ (kN) | | | | | | | | | | | | | | | |
|----------------|--------------------|--------------------------|--|-------|-------|-------|-------|-------|--------|--------|--------------|--------------|--------------|--------------|--------------|--------------|--|--|
| | | | 3.64 | 5.47 | 7.29 | 9.11 | 10.93 | 12.76 | 14.58 | 16.40 | 18.22 | 20.04 | 21.87 | 25.51 | 29.15 | 31.42 | | |
| 10 | 12 | 80 | 3.64 | 5.47 | 7.29 | 9.11 | 10.93 | 12.76 | 14.58 | 16.40 | 18.22 | 20.04 | 21.87 | 25.51 | 29.15 | 31.42 | | |
| | | 100 | 6.60 | 9.91 | 13.21 | 16.51 | 19.81 | 23.12 | 26.42 | 29.72 | 31.42 | 31.42 | 31.42 | 31.42 | 31.42 | 31.42 | | |
| 12 | 15 | 80 | 4.37 | 6.56 | 8.75 | 10.93 | 13.12 | 15.31 | 17.49 | 19.68 | 21.87 | 24.05 | 26.24 | 30.61 | 34.99 | 39.36 | | |
| | | 100 | 7.93 | 11.89 | 15.85 | 19.81 | 23.78 | 27.74 | 31.70 | 35.67 | 39.63 | 43.59 | 45.24 | 45.24 | 45.24 | 45.24 | | |
| 16 | 20 | 80 | | 8.75 | 11.66 | 14.58 | 17.49 | 20.41 | 23.32 | 26.24 | 29.15 | 32.07 | 34.99 | 40.82 | 46.65 | 52.48 | | |
| | | 100 | | 15.85 | 21.13 | 26.42 | 31.70 | 36.99 | 42.27 | 47.55 | 52.84 | 58.12 | 63.40 | 73.97 | 80.42 | 80.42 | | |
| 20 | 25 | 80 | | | 14.58 | 18.22 | 21.87 | 25.51 | 29.15 | 32.80 | 36.44 | 40.09 | 43.73 | 51.02 | 58.31 | 65.60 | | |
| | | 100 | | | 26.42 | 33.02 | 39.63 | 46.23 | 52.84 | 59.44 | 66.05 | 72.65 | 79.26 | 92.46 | 105.67 | 118.88 | | |
| 24 | 30 | 80 | | | | 21.87 | 26.24 | 30.61 | 34.99 | 39.36 | 43.73 | 48.10 | 52.48 | 61.22 | 69.97 | 78.72 | | |
| | | 100 | | | | 39.63 | 47.55 | 55.48 | 63.40 | 71.33 | 79.26 | 87.18 | 95.11 | 110.96 | 126.81 | 142.66 | | |
| 25 | 30 | 80 | | | | 22.78 | 27.33 | 31.89 | 36.44 | 41.00 | 45.55 | 50.11 | 54.66 | 63.78 | 72.89 | 82.00 | | |
| | | 100 | | | | 41.28 | 49.53 | 57.79 | 66.05 | 74.30 | 82.56 | 90.81 | 99.07 | 115.58 | 132.09 | 148.60 | | |
| 28 | 35 | 80 | | | | | 30.61 | 35.71 | 40.82 | 45.92 | 51.02 | 56.12 | 61.22 | 71.43 | 81.63 | 91.84 | | |
| | | 100 | | | | | 55.48 | 64.73 | 73.97 | 83.22 | 92.46 | 101.71 | 110.96 | 129.45 | 147.94 | 166.44 | | |
| 32 | 40 | 80 | | | | | | 40.82 | 46.65 | 52.48 | 58.31 | 64.14 | 69.97 | 81.63 | 93.29 | 104.96 | | |
| | | 100 | | | | | | 73.97 | 84.54 | 95.11 | 105.67 | 116.24 | 126.81 | 147.94 | 169.08 | 190.21 | | |
| 36 | 45 | 80 | | | | | | 45.92 | 52.48 | 59.04 | 65.60 | 72.16 | 78.72 | 91.84 | 104.96 | 118.08 | | |
| | | 100 | | | | | | 83.22 | 95.11 | 107.00 | 118.88 | 130.77 | 142.66 | 166.44 | 190.21 | 213.99 | | |
| 40 | 50 | 80 | | | | | | 51.02 | 58.31 | 65.60 | 72.89 | 80.17 | 87.46 | 102.04 | 116.62 | 131.19 | | |
| | | 100 | | | | | | 92.46 | 105.67 | 118.88 | 132.09 | 145.30 | 158.51 | 184.93 | 211.35 | 237.77 | | |
| Embedment (mm) | | | 100 | 150 | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 550 | 600 | 700 | 800 | 900 | | |

*Note: Minimum concrete cover based on minimum slab thickness of 200mm according to Eurocode 2 Part 1.2 (EN 1992-1-2)

**Note: Performance data based on hammer drilling technique. For data using core drilling technique, please refer to Ramset Engineer.

Bold values depicts design tensile steel resistance governs.

Note: Design resistance is based on 20 MPa concrete strength. For values in higher concrete strengths, and design optimisation, please refer to Ramset iExpert Anchor Software.


Chemset™ EPCON™ G5 Xtrem™

FIRE RATED CHEMICAL ANCHOR

AVAILABLE IN NEW ZEALAND ONLY

Fire Rated Anchoring Systems

Reinforcing Bar Anchored with ChemSet™ EPCON™ G5 Xtrem™

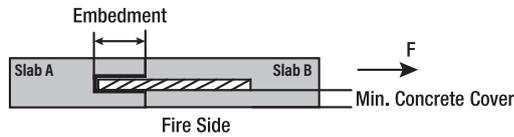

Design Case 3

Fire resistance duration = 90 minutes

For Reinforcing Bar Steel Grade - 500 MPa and Concrete cylinder compressive strength $f'_c = 20$ MPa

| Rebar Size | Hole Diameter (mm) | *Min. Concrete Cover(mm) | **Design resistance in accordance with Eurocode 2 for fire duration 90 minutes - $R_{d,fi}$ (kN) | | | | | | | | | | | | | | | |
|----------------|--------------------|--------------------------|--|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------------|--------------|--------|--------|
| | | | 4.05 | 5.39 | 6.74 | 8.09 | 9.44 | 10.79 | 12.14 | 13.49 | 14.84 | 16.18 | 18.88 | 21.58 | 24.28 | 26.97 | | |
| 10 | 12 | 90 | 4.05 | 5.39 | 6.74 | 8.09 | 9.44 | 10.79 | 12.14 | 13.49 | 14.84 | 16.18 | 18.88 | 21.58 | 24.28 | 26.97 | | |
| | | 100 | 5.28 | 7.03 | 8.79 | 10.55 | 12.31 | 14.07 | 15.83 | 17.59 | 19.34 | 21.10 | 24.62 | 28.14 | 31.42 | 31.42 | | |
| 12 | 15 | 90 | 4.86 | 6.47 | 8.09 | 9.71 | 11.33 | 12.95 | 14.57 | 16.18 | 17.80 | 19.42 | 22.66 | 25.90 | 29.13 | 32.37 | | |
| | | 100 | 6.33 | 8.44 | 10.55 | 12.66 | 14.77 | 16.88 | 18.99 | 21.10 | 23.21 | 25.32 | 29.54 | 33.76 | 37.98 | 42.20 | | |
| 16 | 20 | 90 | | 8.63 | 10.79 | 12.95 | 15.11 | 17.26 | 19.42 | 21.58 | 23.74 | 25.90 | 30.21 | 34.53 | 38.84 | 43.16 | | |
| | | 100 | | 11.25 | 14.07 | 16.88 | 19.70 | 22.51 | 25.32 | 28.14 | 30.95 | 33.76 | 39.39 | 45.02 | 50.65 | 56.27 | | |
| 20 | 25 | 90 | | | 13.49 | 16.18 | 18.88 | 21.58 | 24.28 | 26.97 | 29.67 | 32.37 | 37.76 | 43.16 | 48.55 | 53.95 | | |
| | | 100 | | | 17.59 | 21.10 | 24.62 | 28.14 | 31.65 | 35.17 | 38.69 | 42.20 | 49.24 | 56.27 | 63.31 | 70.34 | | |
| 24 | 30 | 90 | | | | 19.42 | 22.66 | 25.90 | 29.13 | 32.37 | 35.61 | 38.84 | 45.32 | 51.79 | 58.27 | 64.74 | | |
| | | 100 | | | | 25.32 | 29.54 | 33.76 | 37.98 | 42.20 | 46.42 | 50.65 | 59.09 | 67.53 | 75.97 | 84.41 | | |
| 25 | 30 | 90 | | | | 20.23 | 23.60 | 26.97 | 30.35 | 33.72 | 37.09 | 40.46 | 47.21 | 53.95 | 60.69 | 67.44 | | |
| | | 100 | | | | 26.38 | 30.77 | 35.17 | 39.57 | 43.96 | 48.36 | 52.76 | 61.55 | 70.34 | 79.13 | 87.93 | | |
| 28 | 35 | 90 | | | | | 26.44 | 30.21 | 33.99 | 37.76 | 41.54 | 45.32 | 52.87 | 60.42 | 67.98 | 75.53 | | |
| | | 100 | | | | | 34.47 | 39.39 | 44.31 | 49.24 | 54.16 | 59.09 | 68.93 | 78.78 | 88.63 | 98.48 | | |
| 32 | 40 | 90 | | | | | | 34.53 | 38.84 | 43.16 | 47.48 | 51.79 | 60.42 | 69.05 | 77.69 | 86.32 | | |
| | | 100 | | | | | | 45.02 | 50.65 | 56.27 | 61.90 | 67.53 | 78.78 | 90.04 | 101.29 | 112.55 | | |
| 36 | 45 | 90 | | | | | | | 38.84 | 43.70 | 48.55 | 53.41 | 58.27 | 67.98 | 77.69 | 87.40 | 97.11 | |
| | | 100 | | | | | | | 50.65 | 56.98 | 63.31 | 69.64 | 75.97 | 88.63 | 101.29 | 113.95 | 126.61 | |
| 40 | 50 | 90 | | | | | | | | 43.16 | 48.55 | 53.95 | 59.34 | 64.74 | 75.53 | 86.32 | 97.11 | 107.90 |
| | | 100 | | | | | | | | 56.27 | 63.31 | 70.34 | 77.37 | 84.41 | 98.48 | 112.55 | 126.61 | 140.68 |
| Embedment (mm) | | | 150 | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 550 | 600 | 700 | 800 | 900 | 1000 | | |

*Note: Minimum concrete cover based on minimum slab thickness of 200mm according to Eurocode 2 Part 1.2 (EN 1992-1-2)

**Note: Performance data based on hammer drilling technique. For data using core drilling technique, please refer to Ramset Engineer. Bold values depicts design tensile steel resistance governs

Design Case 4

Fire resistance duration = 120 minutes

For Reinforcing Bar Steel Grade - 500 MPa and Concrete cylinder compressive strength $f'_c = 20$ MPa

| Rebar Size | Hole Diameter (mm) | *Min. Concrete Cover(mm) | **Design resistance in accordance with Eurocode 2 for fire duration 120 minutes - $R_{d,fi}$ (kN) | | | | | | | | | | | | | | | |
|----------------|--------------------|--------------------------|---|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|
| | | | 3.64 | 4.55 | 5.47 | 6.38 | 7.29 | 8.20 | 9.11 | 10.02 | 10.93 | 12.75 | 14.57 | 16.40 | 18.22 | 20.04 | | |
| 10 | 12 | 90 | 3.64 | 4.55 | 5.47 | 6.38 | 7.29 | 8.20 | 9.11 | 10.02 | 10.93 | 12.75 | 14.57 | 16.40 | 18.22 | 20.04 | | |
| | | 100 | 4.64 | 5.80 | 6.96 | 8.12 | 9.28 | 10.44 | 11.60 | 12.76 | 13.92 | 16.24 | 18.56 | 20.88 | 23.20 | 25.52 | | |
| 12 | 15 | 90 | 4.37 | 5.47 | 6.56 | 7.65 | 8.74 | 9.84 | 10.93 | 12.02 | 13.12 | 15.30 | 17.49 | 19.67 | 21.86 | 24.05 | | |
| | | 100 | 5.57 | 6.96 | 8.35 | 9.74 | 11.13 | 12.53 | 13.92 | 15.31 | 16.70 | 19.48 | 22.27 | 25.05 | 27.84 | 30.62 | | |
| 16 | 20 | 90 | | 7.29 | 8.74 | 10.20 | 11.66 | 13.12 | 14.57 | 16.03 | 17.49 | 20.40 | 23.32 | 26.23 | 29.15 | 32.06 | | |
| | | 100 | | 9.28 | 11.13 | 12.99 | 14.85 | 16.70 | 18.56 | 20.41 | 22.27 | 25.98 | 29.69 | 33.40 | 37.11 | 40.83 | | |
| 20 | 25 | 90 | | | 10.93 | 12.75 | 14.57 | 16.40 | 18.22 | 20.04 | 21.86 | 25.50 | 29.15 | 32.79 | 36.43 | 40.08 | | |
| | | 100 | | | 13.92 | 16.24 | 18.56 | 20.88 | 23.20 | 25.52 | 27.84 | 32.47 | 37.11 | 41.75 | 46.39 | 51.03 | | |
| 24 | 30 | 90 | | | | 15.30 | 17.49 | 19.67 | 21.86 | 24.05 | 26.23 | 30.60 | 34.98 | 39.35 | 43.72 | 48.09 | | |
| | | 100 | | | | 19.48 | 22.27 | 25.05 | 27.84 | 30.62 | 33.40 | 38.97 | 44.54 | 50.10 | 55.67 | 61.24 | | |
| 25 | 30 | 90 | | | | 15.94 | 18.22 | 20.49 | 22.77 | 25.05 | 27.33 | 31.88 | 36.43 | 40.99 | 45.54 | 50.10 | | |
| | | 100 | | | | 20.30 | 23.20 | 26.10 | 29.00 | 31.89 | 34.79 | 40.59 | 46.39 | 52.19 | 57.99 | 63.79 | | |
| 28 | 35 | 90 | | | | | 20.40 | 22.95 | 25.50 | 28.05 | 30.60 | 35.71 | 40.81 | 45.91 | 51.01 | 56.11 | | |
| | | 100 | | | | | 25.98 | 29.23 | 32.47 | 35.72 | 38.97 | 45.46 | 51.96 | 58.45 | 64.95 | 71.44 | | |
| 32 | 40 | 90 | | | | | | 26.23 | 29.15 | 32.06 | 34.98 | 40.81 | 46.64 | 52.47 | 58.29 | 64.12 | | |
| | | 100 | | | | | | 33.40 | 37.11 | 40.83 | 44.54 | 51.96 | 59.38 | 66.80 | 74.23 | 81.65 | | |
| 36 | 45 | 90 | | | | | | | 29.51 | 32.79 | 36.07 | 39.35 | 45.91 | 52.47 | 59.02 | 65.58 | 72.14 | |
| | | 100 | | | | | | | 37.58 | 41.75 | 45.93 | 50.10 | 58.45 | 66.80 | 75.16 | 83.51 | 91.86 | |
| 40 | 50 | 90 | | | | | | | | 32.79 | 36.43 | 40.08 | 43.72 | 51.01 | 58.29 | 65.58 | 72.87 | 80.16 |
| | | 100 | | | | | | | | 41.75 | 46.39 | 51.03 | 55.67 | 64.95 | 74.23 | 83.51 | 92.78 | 102.06 |
| Embedment (mm) | | | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 550 | 600 | 700 | 800 | 900 | 1000 | 1100 | | |

*Note: Minimum concrete cover based on minimum slab thickness of 200mm according to Eurocode 2 Part 1.2 (EN 1992-1-2)

**Note: Performance data based on hammer drilling technique. For data using core drilling technique, please refer to Ramset Engineer.

Note: Design resistance is based on 20 MPa concrete strength. For values in higher concrete strengths, and design optimisation, please refer to Ramset iExpert Anchor Software.

ChemSet™ EPCON™ G5 Xtrem™

FIRE RATED CHEMICAL ANCHOR - ANCHOR STUDS

AVAILABLE IN NEW ZEALAND ONLY

(Australia refer to ChemSet™ Reo502™ Xtrem™ range)

GENERAL INFORMATION

Performance Related



Material Specification



Installation Related



Fire Rated Anchoring Systems

Product

EPCON™ G5 Xtrem™ is a heavy duty pure Epoxy for anchoring threaded studs and reinforcing bar into cracked and uncracked concrete.



Compliance

European Technical Assessment ETA-25/0648

Design according to:

- AS 5216 (formerly TS101)
- EN 1992-4 (formerly ETAG001 Annex C, E & TR045)
- Fire Design according to fire performance data published in ETA-25/0648
- Use enclosed data for simplified calculation method
- Use Ramset™ iExpert Anchor Software for optimised calculation or where a greater range of anchor layout detail is needed.

Benefits, Advantages and Features


- 100 year working life
- Greater productivity:**
 - Anchors in dry, damp, wet or flooded holes
 - Easy dispensing even in cold weather
- Greater security:**
 - Strong bond
 - Rated for sustained loading
- Versatile:**
 - Anchors in carbide drilled and diamond drilled holes
 - Cold and temperate climates
- Greater safety:**
 - Low odour
 - VOC Compliant
 - Suitable for contact with drinking water



Principal Applications

- Threaded Studs
- Starter Bars
- Threaded Inserts
- Over-head installation
- Steel Columns
- Hand Rails
- Road Stitching

Installation

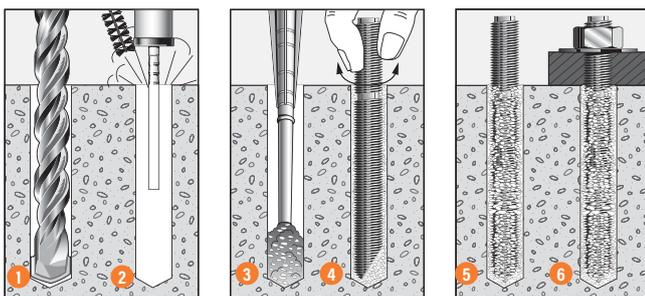

- Drill recommended diameter and depth hole.
- Important:** For hammer drilling technique clean dust and debris from hole with stiff wire brush and blower in the following sequence: blow x 2, brush x 2, blow x 2, brush x 2, blow x 2.
- Screw mixing nozzle onto cartridge and dispense adhesive to waste until colour is orange. Insert mixing nozzle to bottom of hole. Fill hole to 2/3 the hole depth slowly, ensuring no air pockets form.
- Insert Ramset™ ChemSet™ Anchor Stud/rebar to bottom of hole while turning.
- Allow Chemset™ EPCON™ G5 Xtrem™ to cure as per setting times.
- Attach fixture.

Recommended Installation Temperatures

| | Minimum | Maximum |
|-----------|---------|---------|
| Substrate | 5°C | 40°C |
| Adhesive | 5°C | 40°C |

Service Temperature Limits

| |
|--------------------|
| T1: -40°C to +40°C |
| T2: -40°C to +60°C |

Setting Times

| Temperature of base material | Gel Time | Curing time in dry concrete | Curing time in wet and flooded concrete |
|------------------------------|----------|-----------------------------|---|
| 5°C | 75 min | 30h | 60 h |
| 10°C | 45 min | 22h | 44 h |
| 15°C | 35 min | 14h | 28 h |
| 20°C | 22 min | 7h | 14 h |
| 25°C | 14 min | 5h | 10 h |
| 30°C | 8 min | 4h | 8 h |
| 35°C | 6 min | 3h | 6h |
| 40°C | 4 min | 2h 45min | 5h 30min |

ChemSet™ EPCON™ G5 Xtrem™

FIRE RATED CHEMICAL ANCHOR - ANCHOR STUDS

Installation and fire performance details: ChemSet™ EPCON™ G5 Xtrem™ and Gr 5.8 ChemSet™ Anchor Studs

Fire Rated Anchoring Systems

| Anchor size, d_b (mm) | Installation Details | | | | Optimum dimensions | | Characteristic values of resistance to tension loads in 20 MPa to 50 MPa concrete strength - $N_{Rk,p,R}$ (kN) per anchor * | | | |
|-------------------------|-----------------------------------|-----------------------------------|----------------------------------|-------------------------------|---------------------------|----------------------------|---|------------------------------------|------------------------------------|-------------------------------------|
| | Drilled hole diameter, d_h (mm) | Fixture hole diameter, d_f (mm) | Anchor effective depth, h (mm) | Tightening torque, T_t (Nm) | Edge distance, e_c (mm) | Anchor spacing, a_c (mm) | Fire resistance duration = 30 Min. | Fire resistance duration = 60 Min. | Fire resistance duration = 90 Min. | Fire resistance duration = 120 Min. |
| M10 | 12 | 12 | 90 | 20 | 135 | 270 | 0.87 | 0.27 | 0.01 | N/A |
| M12 | 14 | 14 | 110 | 30 | 165 | 330 | 2.56 | 1.01 | 0.46 | 0.08 |
| M16 | 18 | 18 | 125 | 60 | 187 | 375 | 4.25 | 1.71 | 0.82 | 0.23 |
| M20 | 25 | 22 | 150 | 120 | 225 | 450 | 8.18 | 3.49 | 1.93 | 1.07 |
| | | | 170 | | 255 | 510 | 12.92 | 5.77 | 3.46 | 2.25 |
| M24 | 28 | 26 | 160 | 150 | 240 | 480 | 9.92 | 4.23 | 2.29 | 1.23 |
| | | | 210 | | 315 | 630 | 26.77 | 12.53 | 7.73 | 5.44 |
| M30 | 35 | 33 | 280 | 180 | 420 | 840 | 68.59 | 35.06 | 22.79 | 15.48# |

*Note:

Data is valid for Grade 5.8 ChemSet™ Anchor Studs

Data applies to uncracked and cracked reinforced concrete

Data applies to a one-sided fire exposure of the structural elements. For conditions of fire load on several sides, please contact your local Ramset™ engineer

Data is based on concrete cylinder strength between 20 MPa to 50 MPa.

Data is based on a minimum concrete substrate thickness of $2 \times h$ ($2 \times$ effective depth).

Data is based on service temperature limit T_I : -40°C to $+40^\circ\text{C}$. For performance data on other service temperature limits, please contact your local Ramset™ engineer.

#Note:

M30 data for 120min is based on steel failure of the ChemSet™ Anchor Stud,

DESCRIPTION AND PART NUMBERS

| Description | Cartridge Size | Part No. |
|---------------------------|----------------|----------|
| ChemSet™ EPCON™ G5 Xtrem™ | 600 ml | CEG5X600 |

ENGINEERING PROPERTIES

ChemSet™ Anchor Studs

| Anchor Size, d_b | Grade 5.8 ChemSet™ Anchor Studs | | | |
|--------------------|---------------------------------|----------------------------------|--------------------------|---------------|
| | Shank diameter, d_s (mm) | Stressed Area (mm ²) | Yield Strength f_y MPa | UTS f_u MPa |
| M10 | 8.2 | 52.8 | 430 | 540 |
| M12 | 10.0 | 78.5 | 430 | 540 |
| M16 | 14.0 | 153.9 | 420 | 520 |
| M20 | 17.2 | 232.4 | 420 | 520 |
| M24 | 20.7 | 336.5 | 420 | 520 |
| M30 | - | - | - | - |

Customer service

Ramset™ Australia

Sales, Orders and Enquiries

Tel: 1300 780 063

Email: enquiry@ramset.com.au

Web: www.ramset.com.au

Ramset™ New Zealand

Sales, Orders and Enquiries

Tel: 0800 RAMSET (726738)

Email: info@ramsetreid.co.nz

Web: www.ramset.co.nz

Ramset™ 1 Ramset Drive, Chirnside Park 3116

Information in this documents is correct at the time of printing. Readers should contact Ramset™ or consult Ramset™ detailed technical information to ensure product is suitable for intended use prior to purchase.

ITW Australia Pty Ltd ABN 63 004 235 063 trading as Ramset™

© Copyright 2026.™ Trademarks of Cetram Pty. Ltd. Used under license by Ramset™

Important Disclaimer: Any engineering information or advice ("Information") provided by Ramset™ in this document is issued in accordance with a prescribed standard, published performance data or design software. It is the responsibility of the user to obtain its own independent engineering (or other) advice to assess the suitability of the Information for its own requirements. To the extent permitted by law, Ramset™ will not be liable to the recipient or any third party for any direct or indirect loss or liability arising out of, or in connection with, the Information.

